



DATE	REVISED BY
DESCRIPTION	

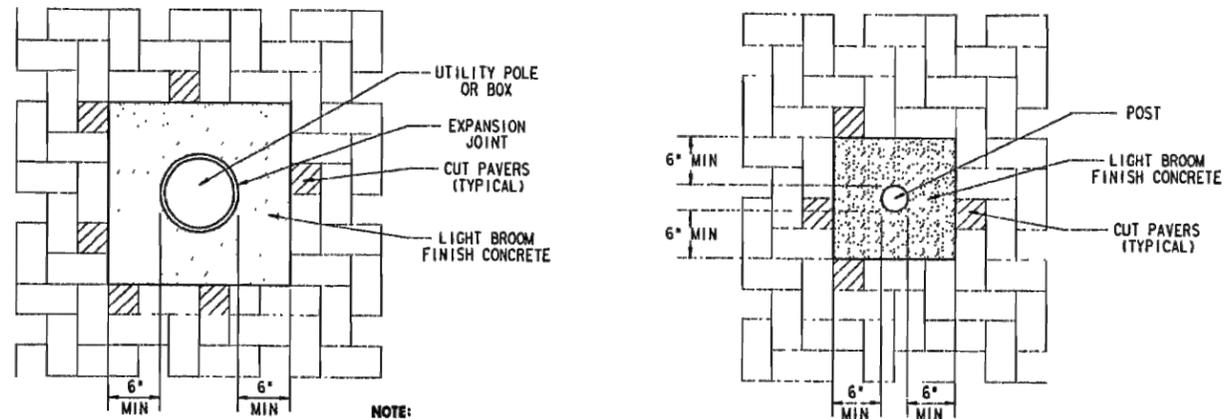


**NOTE:**  
A CONCRETE PAD (4" DEPTH) SHALL BE PLACED AROUND ALL UTILITY POLES, BOXES, AND POSTS ON THE SITE. A MINIMUM OF 6" OF CONCRETE SHALL EXTEND BEYOND THE EDGE OF ANY POLE OR POST. THIS PAD SHALL COINCIDE WITH THE PATTERN OF THE PAVERS. THE AMOUNT OF CUT BRICKS SHALL BE KEPT TO A MINIMAL AMOUNT.


**1**  
**10** TYPICAL CONCRETE PADS AT POLES AND POSTS  
NOT TO SCALE

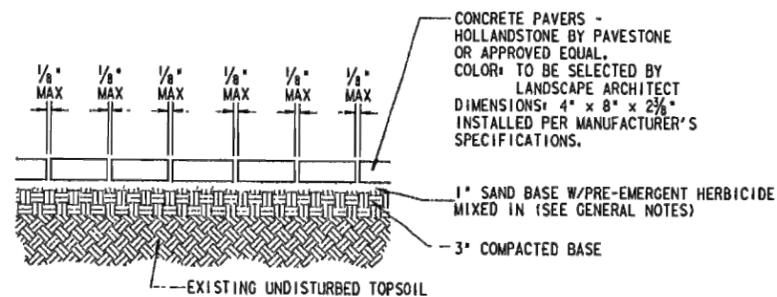


**2**  
**10** PAVER DETAIL  
NOT TO SCALE

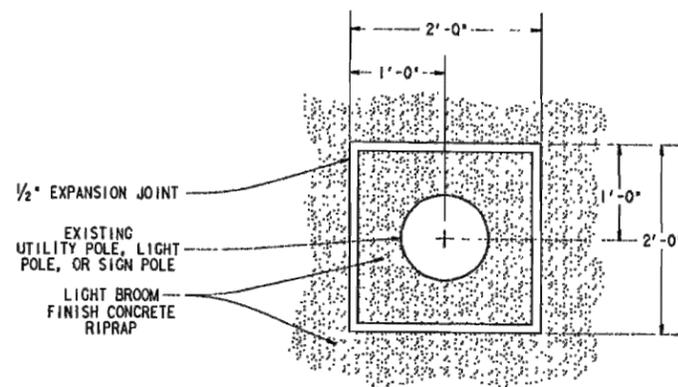

**3**  
**10** UTILITY POLE AND EXPANSION JOINT DETAILS  
NOT TO SCALE

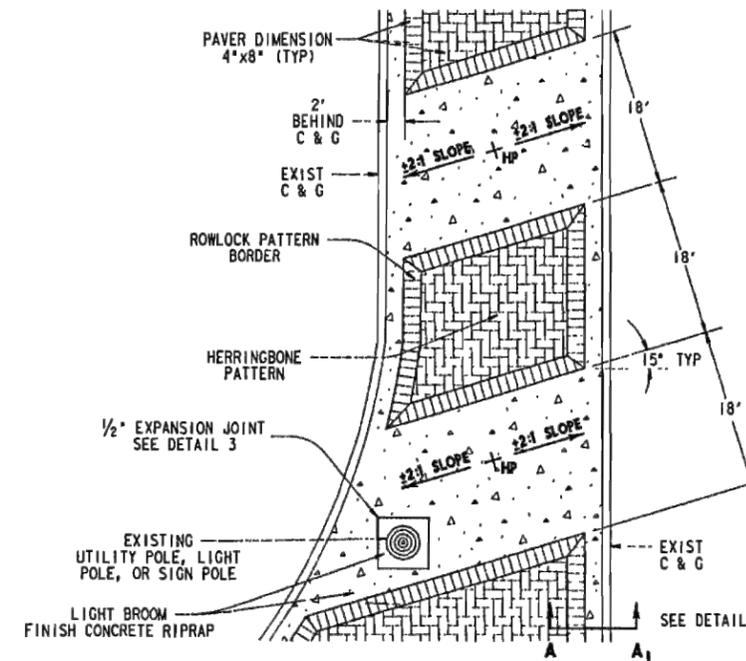

**4**  
**10** TYPICAL MEDIAN PAVER PATTERN AND DETAILS  
NOT TO SCALE

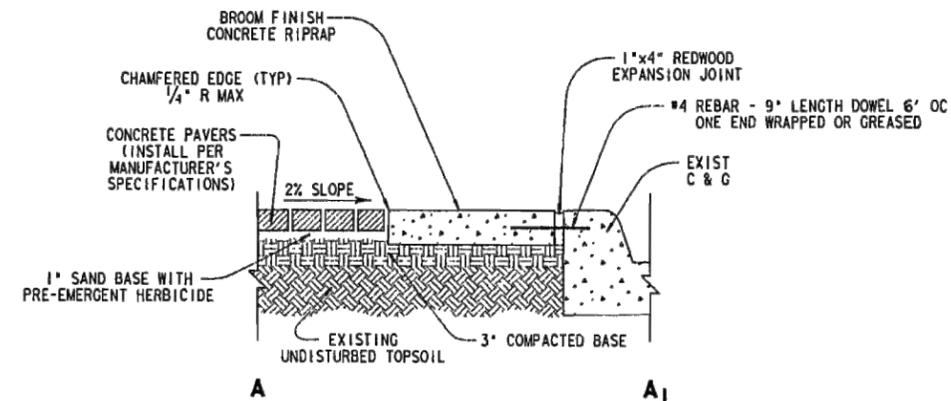

**5**  
**10** PAVER AND RIPRAP BEHIND CURB DETAILS  
NOT TO SCALE

**NOTE: INSTALLATION PATTERN SHALL BE HERRINGBONE. PATTERN ORIENTATION AS DIRECTED BY THE ENGINEER.**

**PAVESTONE CONCRETE PAVERS**  
3215 WM. D. TATE AVE  
GRAPEVINE, TEXAS 76051  
1-800-772-7834 OR (214) 404-0400  
(OR APPROVED EQUAL)

**LANDSCAPE  
CONSTRUCTION  
DETAILS**  
SHEET 10 OF 10

FED. RD. DIST. NO.	FEDERAL AID PROJECT NO.	SHEET NO.
6	STP 93 (215) UM	91
STATE	COUNTY	
TEXAS	MIDLAND	
CONT.	SECT.	JOB
1188	02	046
		LP 250