



**Request for Proposal, 16MCO11**  
**In response refer to RFP No. 16MCO511 Addendum 3 (three)**  
**March 4, 2016**

Gentlemen/Ladies:

Please note that there have been changes made to the original request for proposal. These changes are provided on the following pages of this addendum.



# VANDERGRIFF GROUP

ARCHITECTS • PC

312 N. BIG SPRING  
SUITE 100  
MIDLAND, TEXAS 79701  
(432) 687-0781  
FAX (432) 687-5205

## ADDENDUM

**PROJECT:**

Midland County Amphitheatre  
**Concrete Bid Package**  
Midland, Texas

ADDENDUM NO. 3

PAGES: 2

DATE: March 4, 2016

ARCHITECTS PROJECT NO.: 01515

**OWNER:**

Midland County

**TO:** All persons that have project manuals and drawings.

---

The following items take precedence over drawings and project manual for the above named project and in closing a contract shall become a part of the contract documents.

Where any item called for in the specifications or indicated on the drawings is supplemental here, the original requirements remain in effect. Consider all supplemental conditions as added to the specifications and drawings.

Where any original item is amended, voided and superseded here, the provisions of such items not specifically amended, voided or superseded remain in effect.

---

### ARCHITECTURAL

Item 1                      Re:    Construction Documents; Architectural Sheet ; Concrete thicknesses

Please note the following clarifications on concrete slab thicknesses:

Concrete flat work thicknesses shall be 4" priced and installed as indicated below:

Sidewalks (Greater than 1/4" / 1'-0") = 4"

Sidewalks (less than 1/4" / 1'-0") = 4"

At Spot light bases = 5"

At Fixed Seating = 5"

All other locations 5" unless noted otherwise

All walkways and ramps are flat slabs without thickened edges unless detailed otherwise.

---

Item 2 Re: Construction Documents; Architectural Sheet SD-02; Clarification of wall types and limits. Wall types and locations are shown on this sheet.

---


Item 3 Re: Construction Documents; Architectural Sheet A-122 , Detail 3 shows ½” diameter pipe sleeve for drainage. This should be placed every 32” o.c.

---

Item 4 Re: RFP; Specifications Sheet 8; Work completion date of April 30, 2016 remains in effect for all concrete work. Pipe railings which are a component of the Concrete Bid Package can be completed without assessment of liquidated damages up to May 31, 2016 until 11:59 p.m.

---

---

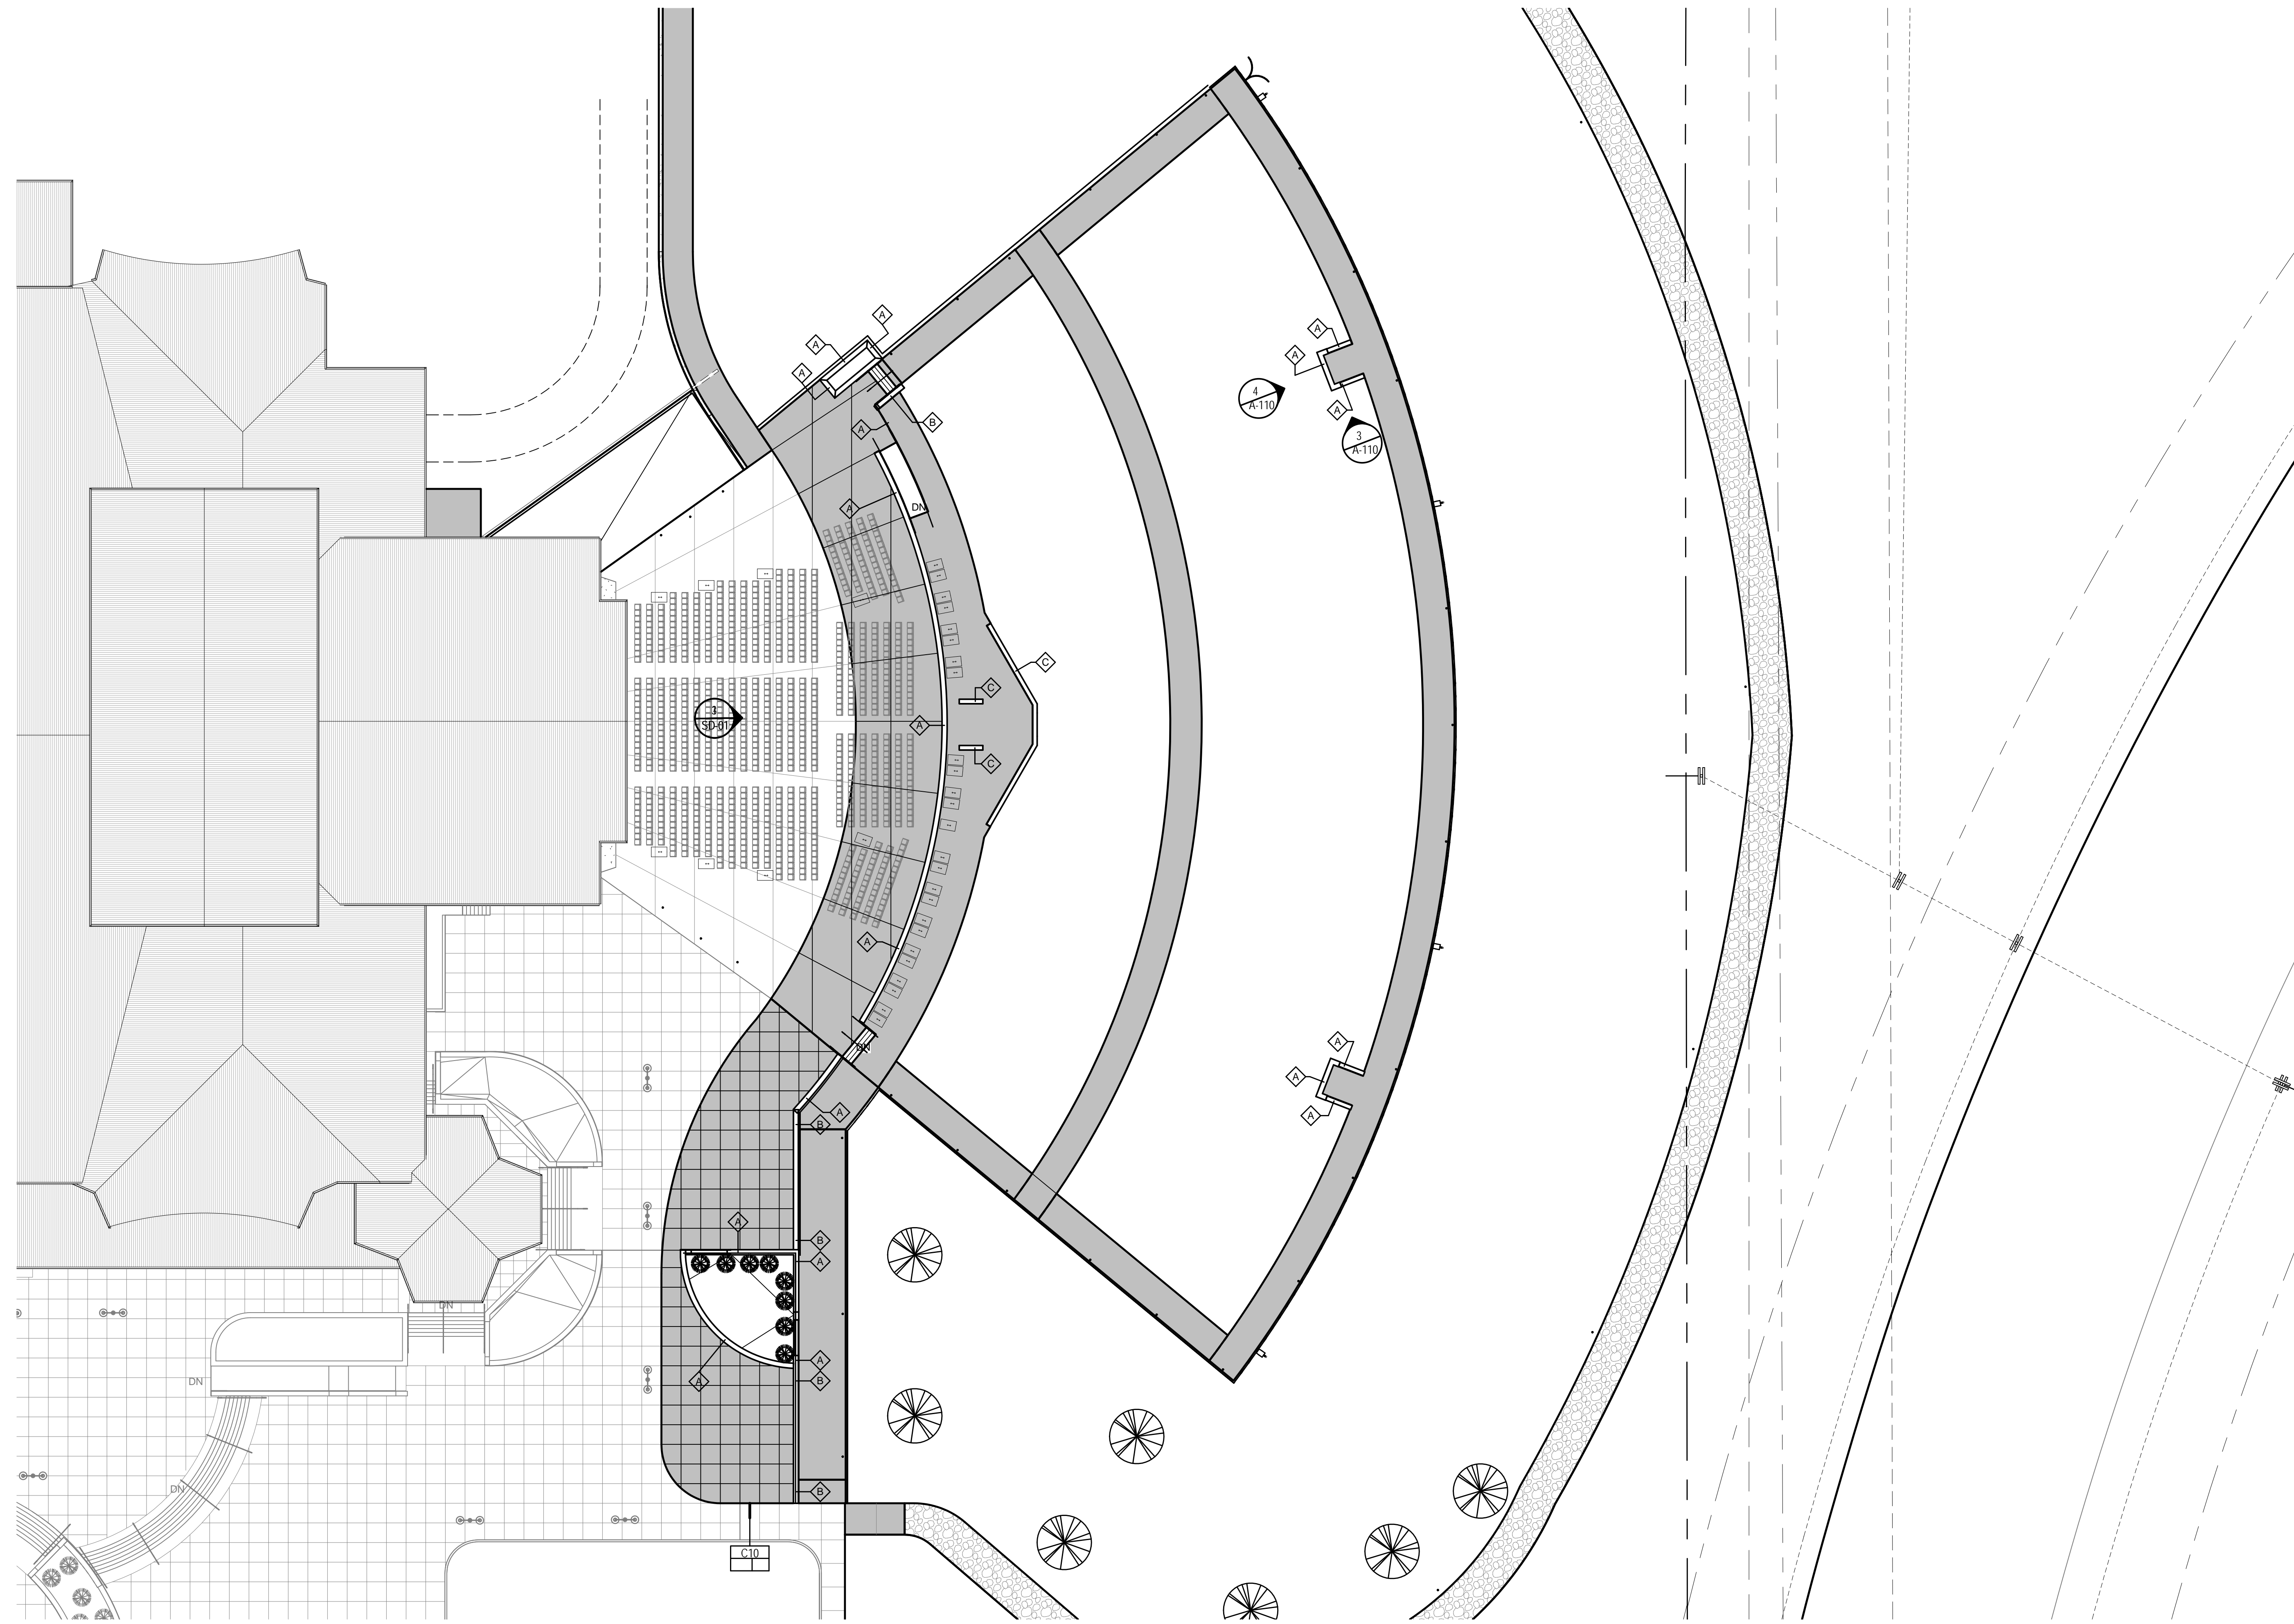




**1 SITE PLAN**  
SD-02  
1" = 20'-0"

**WALL TYPES**

**WALL TYPES A**

**WALL TYPES B**

**WALL TYPES C**

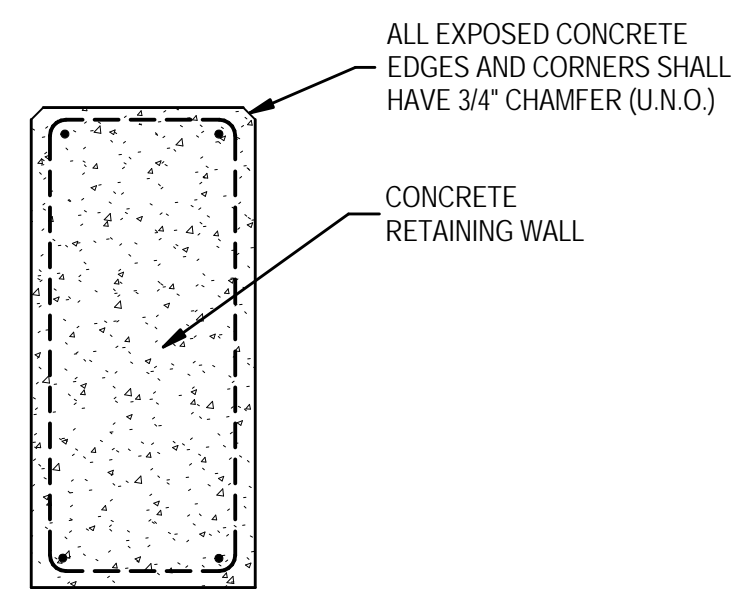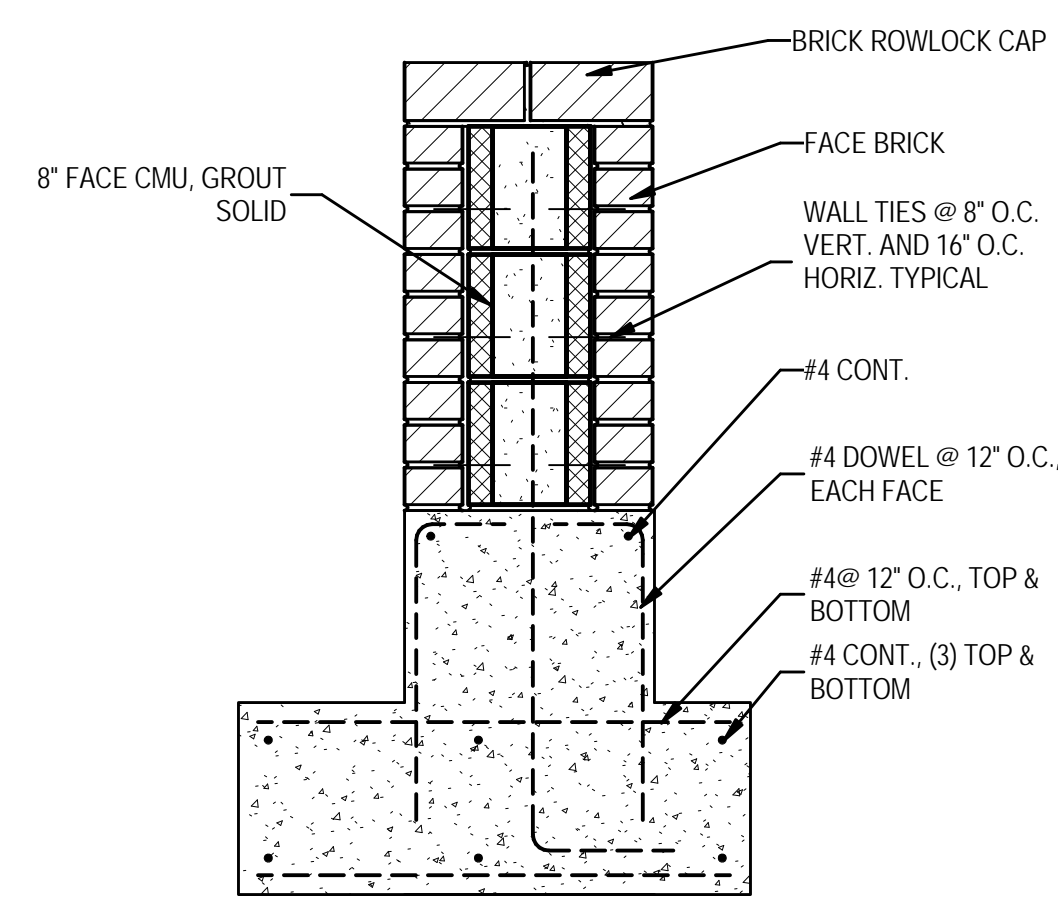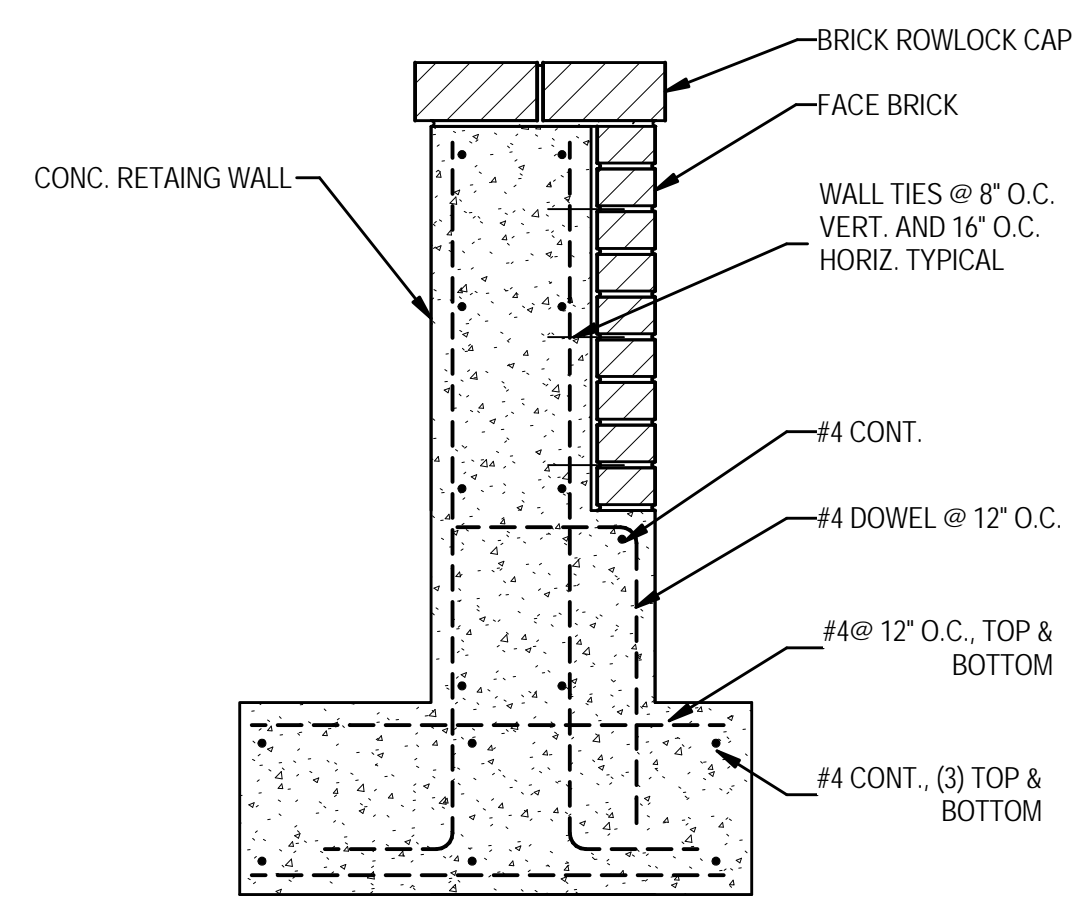

SEE DETAILS FOR DIMENSION

NO.	DATE	REVISION DESCRIPTION

