



**GENERAL NOTES:**

1. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO COMPLY WITH ALL FEDERAL, STATE AND LOCAL REQUIREMENTS BEFORE AND DURING CONSTRUCTION. THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS PRIOR TO AND THROUGHOUT CONSTRUCTION.
2. THE CONTRACTOR SHALL COORDINATE THE CONSTRUCTION SCHEDULE WITH THE OWNER, ALL AFFECTED UTILITY COMPANIES AND ALL OTHER ENTITIES HAVING JURISDICTION OVER THE PROJECT.
3. DIMENSIONS AND COORDINATES SHOWN ON THE PLANS INDICATE THE INTENT OF THE ENGINEER. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND GRADES PRIOR TO COMMENCING WITH THE WORK. ANY DISCREPANCIES NOTED SHALL BE REPORTED IMMEDIATELY TO THE ENGINEER. ADDITIONALLY, THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND COORDINATES DURING CONSTRUCTION LAYOUT PRIOR TO THE COMMENCEMENT OF CONSTRUCTION. OTHERWISE, THE CONTRACTOR SHALL BE HELD RESPONSIBLE FOR THEIR CORRECTNESS.
4. WARNING! BEFORE EXCAVATING, CONTRACTOR IS RESPONSIBLE TO NOTIFY ONE-CALL UTILITY LOCATOR SERVICE PRIOR TO CONSTRUCTION AND HAVE ALL EXISTING UTILITIES AND PIPELINES WITHIN THE PROJECT LIMITS MARKED/FLAGGED PRIOR TO CONSTRUCTION.
5. CONTRACTOR SHALL LOCATE AND PROTECT ALL UNDERGROUND UTILITY LINES. CONTRACTOR SHALL REPLACE ANY UTILITIES DAMAGED DURING CONSTRUCTION, AT NO ADDITIONAL COST TO THE OWNER. CONTRACTOR SHALL VERIFY THE LOCATION AND ELEVATION OF THE EXISTING UTILITIES AND PIPELINES WHICH MAY INTERFERE WITH PROPOSED WORK PRIOR TO THE COMMENCEMENT OF CONSTRUCTION.
6. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO PROTECT ALL PUBLIC UTILITIES DURING THE CONSTRUCTION OF THE PROJECT. ALL MANHOLES, CLEANOUTS, VALVE BOXES, FIRE HYDRANTS, ETC., AND/OR ANY REMOVAL OR DAMAGE TO EXISTING IMPROVEMENTS SHALL BE REPLACED OR REPAIRED BY THE CONTRACTOR AT HIS EXPENSE AND SHALL BE APPROVED BY THE OWNER.
7. ALL WORK ON THIS PROJECT SHALL BE PERFORMED IN STRICT CONFORMANCE WITH ALL CURRENT SAFETY CODES AND STANDARDS, INCLUDING BUT NOT LIMITED TO OSHA REQUIREMENTS.
8. THE SIZE AND LOCATION OF ALL EXISTING UNDERGROUND UTILITIES IDENTIFIED IN THESE CONSTRUCTION PLANS (INCLUDING SERVICE LATERALS) ARE APPROXIMATE AND SHALL BE FIELD VERIFIED BY THE CONTRACTOR PRIOR TO CONSTRUCTION. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO PROTECT THE SAME DURING CONSTRUCTION. IT SHALL BE THE DUTY OF THE CONTRACTOR TO ASCERTAIN WHETHER ANY ADDITIONAL FACILITIES OTHER THAN THOSE SHOWN ON THE PLANS MAY BE PRESENT. THE OWNER OR ENGINEER DOES NOT ASSUME RESPONSIBILITY FOR UTILITIES NOT SHOWN OR NOT IN THE LOCATION SHOWN.
9. "CAUTION" BURIED GAS LINES; CONTRACTOR SHALL CONTACT GAS COMPANIES BEFORE DIGGING.
10. CONTRACTOR SHALL BE RESPONSIBLE FOR RESTORING TO ORIGINAL OR BETTER CONDITION ANY DAMAGE DONE TO EXISTING FENCES, LAWNS, CONCRETE ISLANDS, CURBS, DRIVEWAYS, SIGNS, MAILBOXES, POLES, AND OTHER IMPROVEMENTS. NO SEPARATE PAY ITEM.
12. CONTRACTOR SHALL PROTECT CONTROL POINTS AND GRADE STAKES. ANY DAMAGED CONTROL POINTS OR GRADE STAKES WILL BE REPLACED AT CONTRACTOR'S EXPENSE.
13. CONTRACTOR SHALL PROVIDE CLEAR AND ACCURATE CONSTRUCTION RECORDS ("RED-LINED" MARKED PRINTS AND OTHER DOCUMENTS) TO THE ENGINEER PRIOR TO FINAL INSPECTION INDICATING ALL CONSTRUCTION THAT DEVIATED FROM THE PLANS OR WAS IN ADDITION TO THAT INDICATED ON THE PLANS. MARK UPS SHALL SHOW "AS-BUILT" INFORMATION INCLUDING LOCATION, DIMENSION, SIZE, TYPE, AND MATERIALS FURNISHED AND/OR INSTALLED FOR EACH DEVIATION. ONCE THE CONSTRUCTION IS COMPLETE, THE CONTRACTOR SHALL DELIVER FULL-SIZE RECORD DRAWINGS AND OTHER RECORDS TO THE ENGINEER AND MAINTAIN A COPY FOR THEIR OWN RECORDS WHICH FULLY DESCRIBE ANY DIFFERENCES FROM THE PLANS.

14. CONTRACTOR IS NOTIFIED THAT ALL MATERIALS TO BE REMOVED FROM THE SITE INCLUDING UNSUITABLE SPOIL MATERIAL, REFUSE AND OTHER DEBRIS SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND SHALL BE LAWFULLY REMOVED & DISPOSED OF OUTSIDE THE LIMITS OF THE PROJECT. THE CONTRACTOR SHALL NOTIFY MIDLAND COUNTY, IN WRITING, OF ANY PROPOSED DUMP SITE(S) FOR OVERBURDEN AND ANY CONSTRUCTION DEBRIS FOR REVIEW AND APPROVAL.
15. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO COMPLY WITH ALL STANDARD EMERGENCY CONDITION FOR DISCOVERY OF THREATENED OR ENDANGERED SPECIES.
16. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO COMPLY WITH ALL STANDARD EMERGENCY CONDITION FOR DISCOVERY OF CULTURAL RESOURCES.
17. THE CONTRACTOR IS RESPONSIBLE FOR ALL CONSTRUCTION SURVEYING INCLUDING LOCATING AND VERIFYING PROJECT BENCHMARKS.
18. IN THE CASE OF A DISCREPANCY, THE FOLLOWING ORDER OF PRECEDENCE WILL APPLY: 1. THESE PLANS AND SPECIFICATIONS, 2. TEXAS DEPARTMENT OF TRANSPORTATION "STANDARD SPECIFICATIONS FOR CONSTRUCTION OF HIGHWAY, STREETS AND BRIDGES."
19. IF PRIVATE UTILITY SERVICES SUCH AS WATER, GAS, TELEPHONE, ELECTRIC, ETC. ARE DAMAGED OR NEED TO BE RELOCATED TO ACCOMMODATE THE CONSTRUCTION OF THIS PROJECT, THE CONTRACTOR SHALL PROVIDE TEMPORARY UTILITIES TO THE SATISFACTION OF THE OWNER AND THE PERSON/PERSONS IMPACTED.
20. THE ENGINEER IS NOT RESPONSIBLE FOR CONSTRUCTION SAFETY.
21. THE CONTRACTOR SHALL PROTECT ALL PROPERTY BOUNDARY MARKERS, AND IF DISTURBED, THE CONTRACTOR SHALL HAVE THE BOUNDARY MARKERS RESET AT THE EXPENSE OF THE CONTRACTOR.
22. IN THE EVENT THAT OTHER CONTRACTORS, UTILITIES, MUNICIPALITIES, PRIVATE LANDOWNERS, OR OTHERS ARE DOING WORK THAT IMPACTS THIS PROJECT, THE CONTRACTOR SHALL COORDINATE THE PROPOSED CONSTRUCTION ACTIVITIES AND SCHEDULE WITH THAT OF THE OTHER WORK IN THE AREA.
23. THE CONTRACTOR SHALL MAKE A FINAL CLEAN-UP OF ALL PARTS OF THE WORK AND PREPARE THE SITE IN AN ORDERLY MANNER OF APPEARANCE BEFORE ACCEPTANCE BY THE COUNTY.
24. THE CONTRACTOR SHALL SUBMIT A PLAN FOR ALL MATERIAL STAGING SITES, HAUL ROUTES, AND MATERIAL LOADING AREAS PRIOR TO MATERIAL DELIVERY AND PRIOR TO CONSTRUCTION, WHICH SHALL ALL BE SUBJECT TO THE APPROVAL OF THE OWNER.
25. CONTRACTOR TO AVOID DAMAGING OR DISTURBING MAILBOXES IF POSSIBLE. WHERE AVOIDANCE IS NOT POSSIBLE, THE CONTRACTOR WILL REMOVE AND REINSTALL MAILBOXES. THE CONTRACTOR SHALL NOTIFY THE LANDOWNER THAT THEIR MAILBOX WILL BE TEMPORARILY REMOVED AND REINSTALLED IN THE SAME LOCATION. THE CONTRACTOR WILL COORDINATE WITH THE LANDOWNER FOR REMOVAL OF MATERIALS. ANY WORK THE CONTRACTOR COORDINATES TO REINSTALL A MAILBOX WITH DECORATIVE MATERIALS SHALL BE AT THE EXPENSE OF THE CONTRACTOR OR LANDOWNER.
26. CONTRACTOR SHALL REMOVE ALL DEBRIS AND SWEEP ROADWAY PRIOR TO APPLYING SEAL COAT.
27. MANHOLES AND VALVE BOX LIDS, RAISED PAVEMENT MARKERS, AND SIMILAR OBJECTS SHALL COVERED PRIOR TO APPLYING SEAL COAT.
28. CONTRACTOR TO PLACE TEMPORARY TABS ALONG EXISTING CENTERLINE AND EDGE LINE STRIPING PRIOR TO SEAL COAT.
29. SKIP YELLOW CENTERLINE STRIPE ALL ROADS, EXCEPT WHEN EXISTING STRIPE IS SOLID YELLOW.
30. SOLID WHITE STRIPE EDGE LINES FOR ALL ROADS 26' OR WIDER.



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024



**WTC**  
**ENGINEERS | SURVEYORS**  
**WEST TEXAS CONSULTANTS, INC.**  
 ENGINEERS PLANNERS SURVEYORS  
 405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
 TEXAS REGISTERED ENGINEERING FIRM F-2746  
 TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
 STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
 REQUIRES PREVIOUS NOTIFICATION  
 TEXAS ONE CALL SYSTEM

<b>MIDLAND COUNTY, TEXAS</b>					
<b>2024 MIDLAND PAVEMENT MAINTENANCE PROJECT GENERAL NOTES</b>					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	N/A	<b>A-1.0</b>

DRAWING NO. 2024-001 - DEBRIS AND SWEEP ROADWAY PRIOR TO APPLYING SEAL COAT. PROJECT: COVER LAYOUT TAB A-10 GENERAL NOTES 20240318 10:58 AM LOCAL TIME

**TRAFFIC CONTROL:**

1. TRAFFIC CONTROL IS REQUIRED ON THIS PROJECT AND SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. A TRAFFIC CONTROL PLAN SHALL BE SUBMITTED PRIOR TO THE START OF CONSTRUCTION AS REQUIRED BY THE COUNTY AND STATE.
2. THE CONTRACTOR SHALL PREPARE, FURNISH, MAINTAIN, AND REMOVE ALL TRAFFIC CONTROL DEVICES THROUGHOUT CONSTRUCTION. ALL DEVICES SHALL BE IN CONFORMANCE WITH THE TEXAS MUTCD, LATEST EDITION AS CURRENTLY AMENDED BY THE TEXAS DEPARTMENT OF TRANSPORTATION.
3. THE CONTRACTOR SHALL COORDINATE ROAD AND DRIVEWAY CLOSURES WITH THE OWNERS AND AUTHORITIES HAVING JURISDICTION.
4. CONTRACTOR IS RESPONSIBLE FOR PROVIDING A TRAFFIC CONTROL AND SEQUENCING PLAN. THIS PLAN WILL BE REVIEWED FOR APPROVAL AND AS PART OF THE ASSESSMENT FOR AWARD OF BID. ROAD CLOSURES WILL NOT BE PERMITTED WITHOUT WRITTEN PERMISSION FROM THE COUNTY UPON APPROVAL OF SUBMITTED TRAFFIC CONTROL AND SEQUENCING PLAN.
5. NO SPECIAL PAY FOR TRAFFIC CONTROL ITEMS NOT INCLUDED IN TRAFFIC CONTROL BID. ANY MATERIALS NEEDED FOR TRAFFIC CONTROL SHALL BE INCLUDED IN THE TRAFFIC CONTROL BID ITEM. COUNTY SHALL NOT PROVIDE ANY ASPECTS OF TRAFFIC CONTROL, SEQUENCING, OR ALTERNATIVE ROUTES.

**UTILITY NOTES:**

1. THE CONTRACTOR SHALL PROTECT ALL EXISTING UTILITIES UNLESS NOTED OTHERWISE.
2. CONTRACTOR TO COORDINATE WITH UTILITY OWNERS FOR VERTICAL ADJUSTMENTS TO THEIR FACILITIES PRIOR TO CONSTRUCTION. CONTRACTOR TO FIELD VERIFY DEPTH OF ALL EXISTING PIPELINES PRIOR TO CONSTRUCTION.
3. CONTRACTOR TO FIELD VERIFY HEIGHT OF ALL OVERHEAD UTILITIES PRIOR TO CONSTRUCTION TO ENSURE PROPER CLEARANCE FOR AVOIDANCE OF DAMAGING POWERLINES AND FOR CONSTRUCTION SAFETY PURPOSES.

**SURVEY NOTES:**

HORIZONTAL CONTROL:

1. BASIS OF BEARING, COORDINATES AND DISTANCES ARE A LAMBERT CONICAL PROJECTION OF THE TEXAS COORDINATE SYSTEM, STATE PLANE GRID, NAD 83, TEXAS CENTRAL (4203), WITH A CONVERGENCE ANGLE OF -02° 54' 36.06" AND A SCALE FACTOR OF 1.115460278, BASED ON VRS NETWORK STATION "WTLS 1012" LOCATED AT COORDINATES:  
N: 10704733.169, E: 1754359.228.



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024



**WTC**  
**ENGINEERS | SURVEYORS**  
**WEST TEXAS CONSULTANTS, INC.**  
 ENGINEERS PLANNERS SURVEYORS  
 405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
 TEXAS REGISTERED ENGINEERING FIRM F-2746  
 TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
 STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
 REQUIRES PREVIOUS NOTIFICATION  
 TEXAS ONE CALL SYSTEM

<b>MIDLAND COUNTY, TEXAS</b>					
<b>2024 MIDLAND PAVEMENT MAINTENANCE PROJECT GENERAL NOTES</b>					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	N/A	A-1.1

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND PAVEMENT MAINTENANCE PROJECT\COVER LAYOUT TAB.A-1.1 GENERAL NOTES-20240318.DWG  
 DRAWING: 20240318.DWG  
 COUNTY: MIDLAND  
 COUNTY FILING NO: 2024-1-1  
 DESIGNER: J.C.T.  
 DATE: 3/22/24  
 TIME: 10:00 AM

**DETAILS**

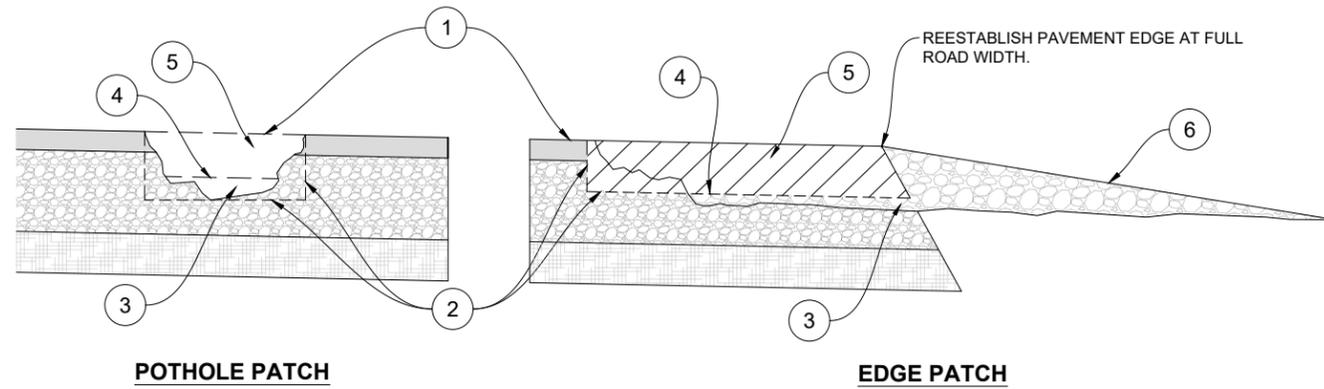

**POTHOLE AND EDGE PATCHING**

NOTES/ STEPS:

1. MARK THE BOUNDARIES OF THE DISTRESSED AREA.
2. CUT THE BOUNDARIES OF THE PATCH SQUARE.
3. SQUARE UP THE SIDES OF THE HOLE UNTIL THE EDGES OF THE HOLE ARE SOUND PAVEMENT.
4. REMOVE WATER AND DEBRIS FROM THE HOLE.
5. APPLY A TACK COAT OF ASPHALT EMULSION TO THE SIDES AND BOTTOM OF THE HOLE (RATE: 0.2 GAL/YD<sup>2</sup>)
6. PLACE THE PATCH MATERIAL IN THE HOLE.
7. COMPACT THE PATCH MATERIAL WITH A HAND DEVICE OR A SMALL VIBRATORY ROLLER.
8. THE FINISHED PATCH SHOULD HAVE A 1/8 INCHES TO 1/4 INCHES CROWN.

**POTHOLE AND EDGE PATCHING DETAIL**

NOTES:

1. DETAIL APPLIES TO POTHoles NEEDING REPAIR, AS SHOWN ON PLANS, AND TO AREAS WHERE THE PAVEMENT EDGE IS BROKEN OFF AND NEEDS TO BE PATCHED TO BRING THE PAVEMENT EDGE BACK TO FULL WIDTH, AS SHOWN ON PLANS.
2. SQUARE AND VERTICALLY SAWCUT THE SIDES OF THE REPAIR AREA, REMOVE LOOSE AND FOREIGN MATERIAL.
3. AS REQUIRED, BACKFILL AND COMPACT BASE MATERIAL.
4. TACK COAT/PRIME COAT TO BE APPLIED ON TOP OF COMPACTED BASE MATERIAL.
5. PLACE AND COMPACT 3 INCHES THICK MINIMUM HMA ELECTRIC HEATED TO 140° MATERIAL TO MATCH EXISTING PAVEMENT, ENSURE THAT WATER DOES NOT POND ON NEW PATCH. THE FINISHED PATCH AREA SHALL HAVE CROWN OF 1/8 INCHES TO 1/4 INCHES
6. ONCE PAVEMENT EDGE PATCH IS COMPLETE, SHOULDER SHOULD BE "PULLED" AS SPECIFIED IN ROAD MAINTENANCE GUIDANCE DOCUMENT (DEC 2022).

**POTHOLE AND EDGE PATCHING FOR AREAS WITH BASE FAILURE**

NOTES/ STEPS:

1. MARK THE BOUNDARIES OF THE DISTRESSED AREA TO BE REPLACED.
2. CUT OUT THE PERIMETER OF THE AREA WITH A DIAMOND SAW OR COLD MILLING MACHINE.
3. BREAK UP AND REMOVE THE FAILED PAVEMENT AND BASE TO THE SUBGRADE MATERIAL.
4. CLEAN AND DRY THE DUG OUT AREA.
5. SWEEP UP LOOSE AGGREGATE.
6. PLACE AND COMPACT NEW CALICHE OR SP-B HMA BASE COURSE MATERIAL.
7. APPLY A TACK/PRIME COAT OF EMULSION TO THE BOTTOM AND SIDES OF THE REPAIR AREA (RATE: 0.2 GAL/YD<sup>2</sup>).
8. PLACE THE PATCH MATERIAL IN THE PREPARED DUG OUT AREA. THE THICKNESS OF ANY LIFT SHOULD NOT EXCEED 4 INCHES.
9. COMPACT EACH LIFT USING EQUIPMENT SIMILAR TO THAT TYPICALLY USED IN HOT-MIX ASPHALT COMPACTION OPERATIONS.
10. THE FINISHED PATCHED AREA SHOULD HAVE A CROWN OF 1/8 INCHES TO 1/4 INCHES.



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

--	--

--	--

**WTC**  
**ENGINEERS | SURVEYORS**  
**WEST TEXAS CONSULTANTS, INC.**  
 ENGINEERS PLANNERS SURVEYORS  
 405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
 TEXAS REGISTERED ENGINEERING FIRM F-2746  
 TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
 STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
 REQUIRES PREVIOUS NOTIFICATION  
 TEXAS ONE CALL SYSTEM

<b>MIDLAND COUNTY, TEXAS</b>					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT DETAILS					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	N/A	A-2.0

DRAWING NO. 2024-001 - 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT - COVER LAYOUT TAB A-2.0 DETAILS-022404 - 10:00 AM 10/24/2024

**DETAILS**

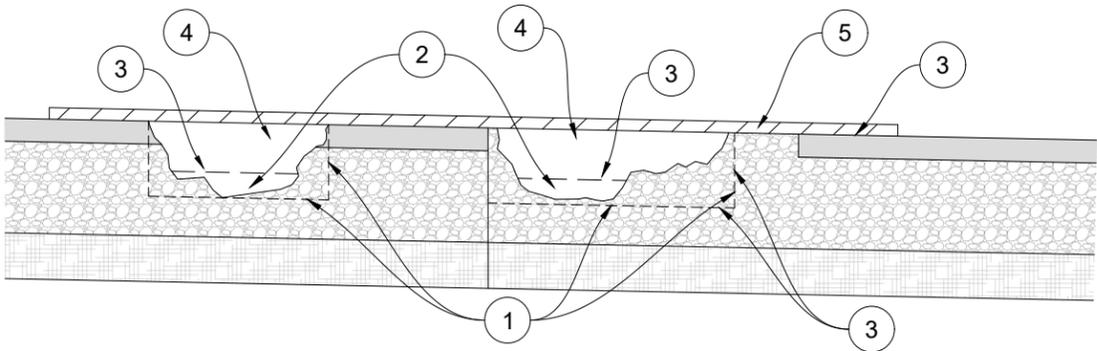

**THIN OVERLAY REPAIR DETAIL**

NOTES:

1. SQUARE AND VERTICALLY SAWCUT THE SIDES OF THE REPAIR AREA, REMOVE LOOSE AND FOREIGN MATERIAL.
2. AS REQUIRED, BACKFILL AND COMPACT BASE MATERIAL.
3. TACK COAT TO BE APPLIED ON TOP OF COMPACTED BASE MATERIAL.
4. PLACE AND COMPACT 3 INCHES THICK MINIMUM (TXDOT ITEM 347) NEW PAVEMENT TO MATCH EXISTING PAVEMENT, ENSURE THAT WATER DOES NOT POND ON NEW PATCH.
5. PLACE AND COMPACT 1/2 INCHES THIN OVERLAY (TXDOT ITEM 347).



*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

--

--

**WTC**  
**ENGINEERS | SURVEYORS**  
**WEST TEXAS CONSULTANTS, INC.**  
 ENGINEERS PLANNERS SURVEYORS  
 405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
 TEXAS REGISTERED ENGINEERING FIRM F-2746  
 TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
 STOP! CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651  
 REQUIRES PREVIOUS NOTIFICATION  
 TEXAS ONE CALL SYSTEM

<b>MIDLAND COUNTY, TEXAS</b>					
<b>2024 MIDLAND PAVEMENT MAINTENANCE PROJECT DETAILS</b>					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	N/A	A-2.1

DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT - COVER LAYOUT TAB A-2.1 DETAILS-2024-18-PM EDGAR RIOS  
 DATE: 3/22/24 10:58 AM

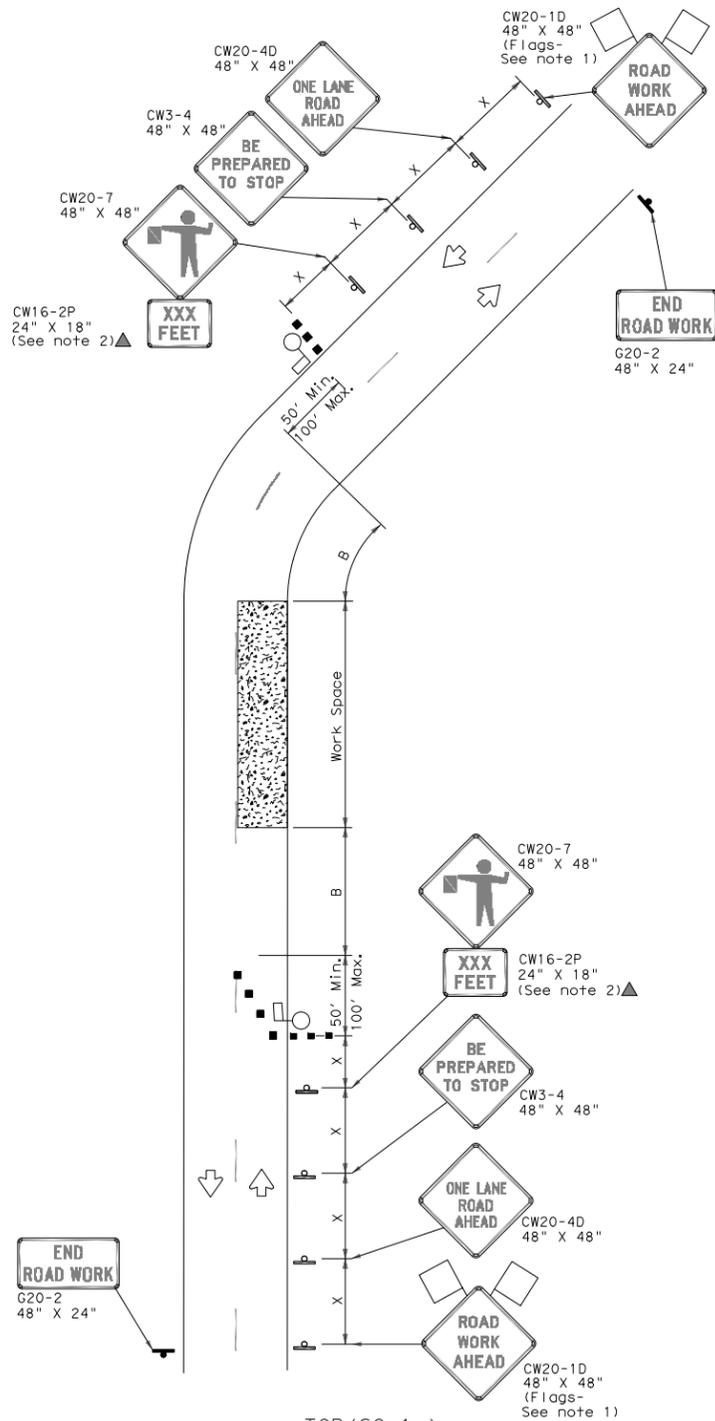

TCP (SC-1a)  
ONE LANE TWO-WAY (2 LANES)  
CONTROL WITH PILOT VEHICLE

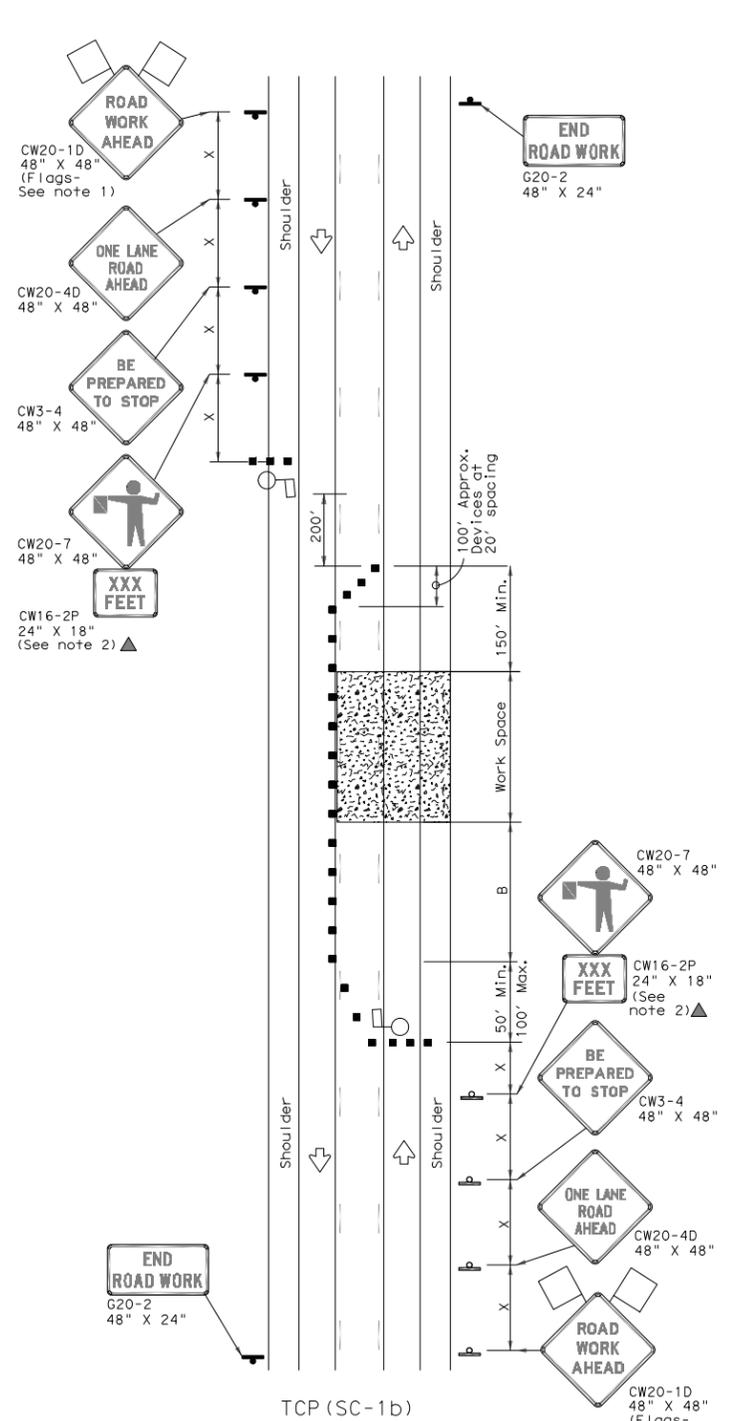

TCP (SC-1b)  
ONE LANE TWO-WAY (3 LANES)  
CONTROL WITH PILOT VEHICLE  
AND CHANNELIZING DEVICES

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "b"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	L = $\frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40	L = WS	265'	295'	320'	40'	80'	240'	155'	305'
45		450'	495'	540'	45'	90'	320'	195'	360'
50	L = WS	500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60	L = WS	600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70	L = WS	700'	770'	840'	70'	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'

\* Conventional Roads Only  
\*\* Taper lengths have been rounded off.  
L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

- GENERAL NOTES**
- Flags attached to signs where shown are REQUIRED.
  - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work when approved by the Engineer.
  - The CW3-4 "BE PREPARED TO STOP" sign may be installed after the CW20-4D "ONE LANE ROAD AHEAD" sign, but proper sign spacing shall be maintained.
  - Sign spacing may be increased or an additional CW20-1D "ROAD WORK AHEAD" sign may be used if advance warning ahead of the flagger sign is less than 1500 feet.
  - Flaggers should use two-way radios or other methods of communication at all times to control traffic.
  - Flaggers should use 24" STOP/SLOW paddles to control traffic. Flags should be limited to emergency situations.
  - If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain adequate stopping sight distance to the flagger and a queue of stopped vehicles (see table above).
  - If the seal coat operation crosses intersections, traffic in these areas must be controlled. Care must be taken to prevent vehicles from crossing the asphalt before the aggregate is placed. This may require positioning other member of the traffic control crew at the intersection.
  - Temporary rumble strips are not required on seal coat operations.
  - Pilot car is used to guide vehicles through traffic control zone, vehicle shall have an identification name displayed and "PILOT CAR, FOLLOW ME" (G20-4) sign or message board mounted in a conspicuous position on rear.

TCP (SC-1a)  
1. Channelizing devices on the center-line may be omitted when a pilot car is leading traffic.


SHEET 1 OF 7

**Texas Department of Transportation**  
Traffic Safety Division Standard

**TRAFFIC CONTROL PLAN  
SEAL COAT  
OPERATIONS**

TCP (SC-1) -21

FILE#	tcpsc-1-21.dgn	DN#	CK#	DR#	CR#
© TxDOT	Apr 11 2021	CONT	SECT	JOB	HIGHWAY
REVISIONS		DIST	COUNTY	SHEET NO.	



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**WTC**  
ENGINEERS | SURVEYORS  
West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

**MIDLAND COUNTY, TEXAS**

2024 MIDLAND PAVEMENT MAINTENANCE PROJECT  
SEALCOAT TCP I

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	N/A	A-3.0





**MIDLAND COUNTY, TEXAS  
2024 PAVEMENT MAINTENANCE PROJECT  
PRECINCT 1  
MARCH 2024  
TWO-COURSE SEAL COAT**



**MIDLAND COUNTY  
TEXAS**

**OWNER:**

MIDLAND COUNTY, MIDLAND, TX.

**UTILITY RELOCATION NOTICE:**



CONTRACTOR SHALL CONTACT THE APPROPRIATE UTILITY COMPANY TO COORDINATE THE RELOCATION OF ANY UTILITY THAT IS FOUND TO BE IN CONFLICT WITH THESE CONSTRUCTION DOCUMENTS.

PREPARED BY



**WEST TEXAS CONSULTANTS, INC.**


ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street  
Andrews, TX 79714  
(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

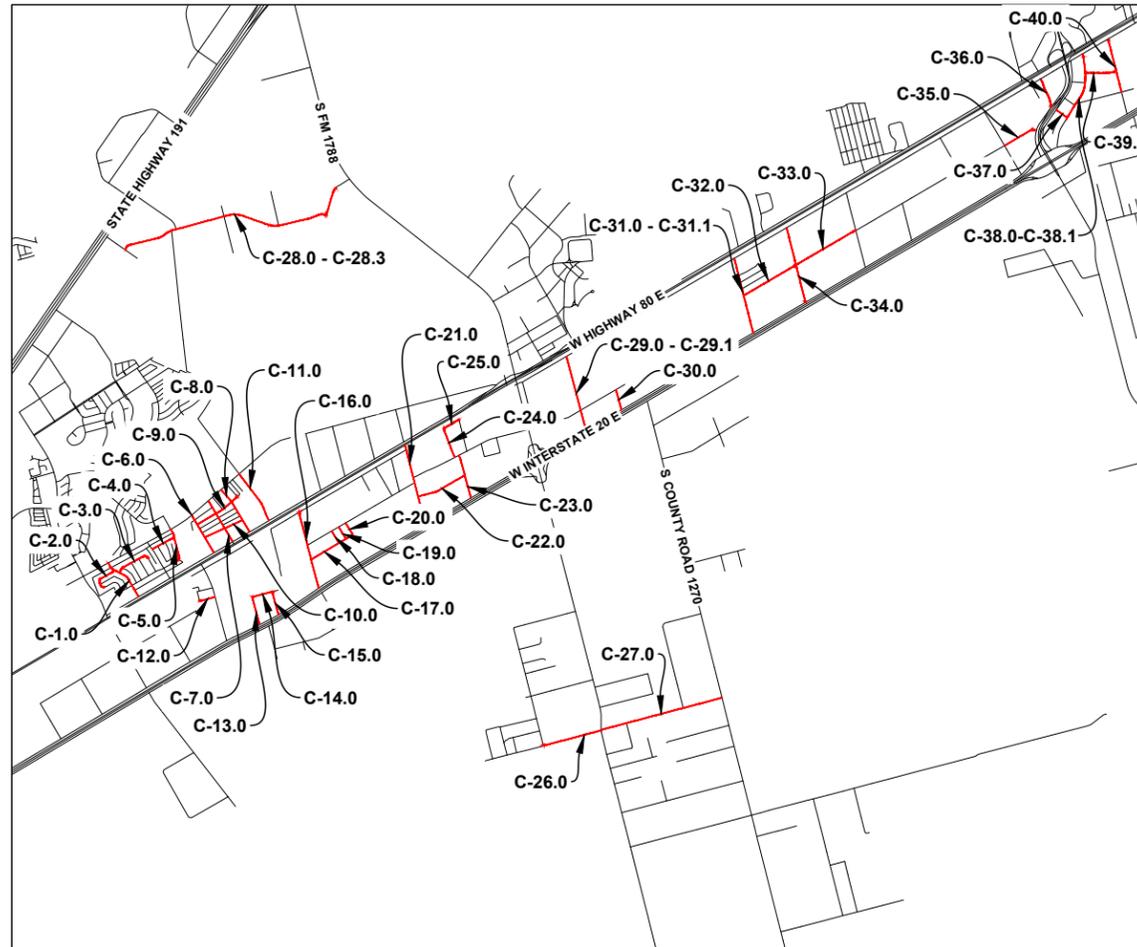

**PROJECT LOCATION MAP**  
NOT TO SCALE


**SHEET INDEX**

C-0.0 - COVER	C-24.0 - S COUNTY ROAD 1286-2
C-1.0 - S COUNTY ROAD 1317	C-25.0 - W COUNTY ROAD 125-3
C-2.0 - W COUNTY ROAD 123-5	C-26.0 - W COUNTY ROAD 150-1.1
C-3.0 - W COUNTY ROAD 123-4	C-27.0 - W COUNTY ROAD 150-1.2
C-4.0 - W COUNTY ROAD 123-1	C-28.0 - W COUNTY ROAD 100-1
C-5.0 - S COUNTY ROAD 1311-2	C-28.1 - W COUNTY ROAD 100-1
C-6.0 - S COUNTY ROAD 1309	C-28.2 - W COUNTY ROAD 100-1
C-7.0 - S COUNTY ROAD 1308	C-28.3 - W COUNTY ROAD 100-1
C-8.0 - S COUNTY ROAD 1307	C-29.0 - S COUNTY ROAD 1276
C-9.0 - W COUNTY ROAD 123-3	C-29.1 - S COUNTY ROAD 1276
C-10.0 - W COUNTY ROAD 125-2	C-30.0 - S COUNTY ROAD 1273
C-11.0 - S COUNTY ROAD 1305	C-31.0 - S COUNTY ROAD 1260
C-12.0 - W COUNTY ROAD 133-2	C-31.1 - S COUNTY ROAD 1260
C-13.0 - S COUNTY ROAD 1305-1	C-32.0 - W COUNTY ROAD 116-1.1
C-14.0 - W COUNTY ROAD 133-1	C-33.0 - W COUNTY ROAD 116-1.2
C-15.0 - S COUNTY ROAD 1303	C-34.0 - S COUNTY ROAD 1255
C-16.0 - S COUNTY ROAD 1300	C-35.0 - EMPRESA DR
C-17.0 - W COUNTY ROAD 129	C-36.0 - TRADE DR
C-18.0 - S COUNTY ROAD 1298	C-37.0 - STATE ST
C-19.0 - S COUNTY ROAD 1297	C-38.0 - COMMERCE DR
C-20.0 - S COUNTY ROAD 1296	C-38.1 - COMMERCE DR
C-21.0 - S COUNTY ROAD 1290	C-39.0 - BASIN ST
C-22.0 - W COUNTY ROAD 128	C-40.0 - MARKET ST
C-23.0 - S COUNTY ROAD 1286	


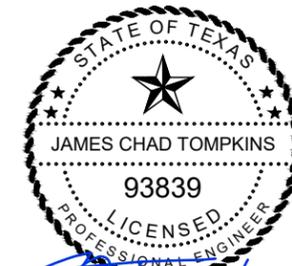


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**S COUNTY ROAD 1317**

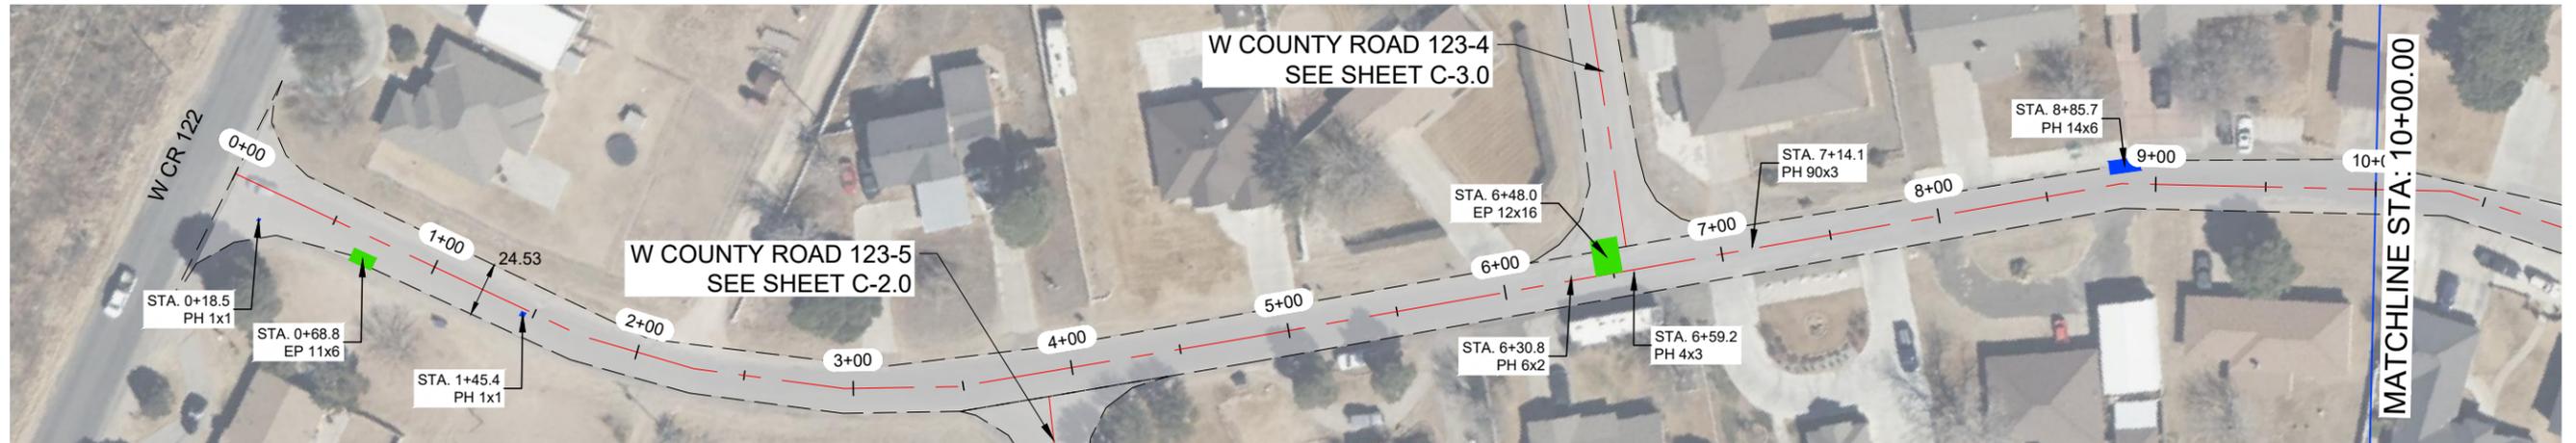

**S COUNTY ROAD 1317**

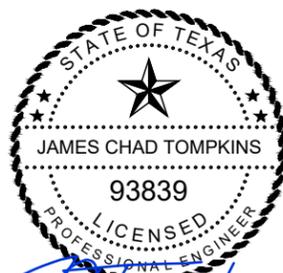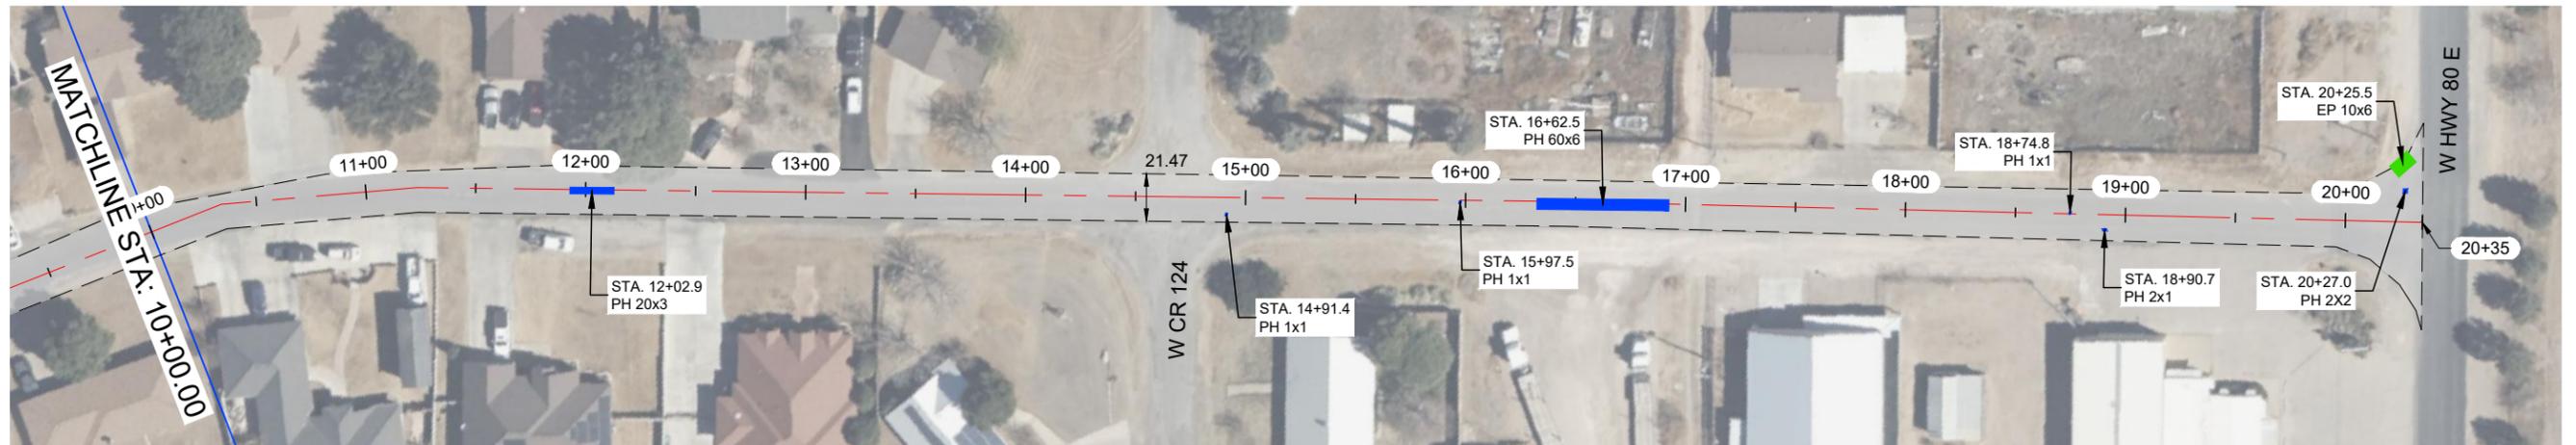

*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1317 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5 142	SY	
2	STRIPING	1 985	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	83.6	SY	
2	EDGE PATCHING (BY OTHERS)	21.3	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1317						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-1.0	



DATE: 3/22/2024 11:52:20 AM; DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT TAB; C:\S\COUNTY ROAD 1317\2024\2024.312.PW; RICHERD



**W COUNTY ROAD 123-4**

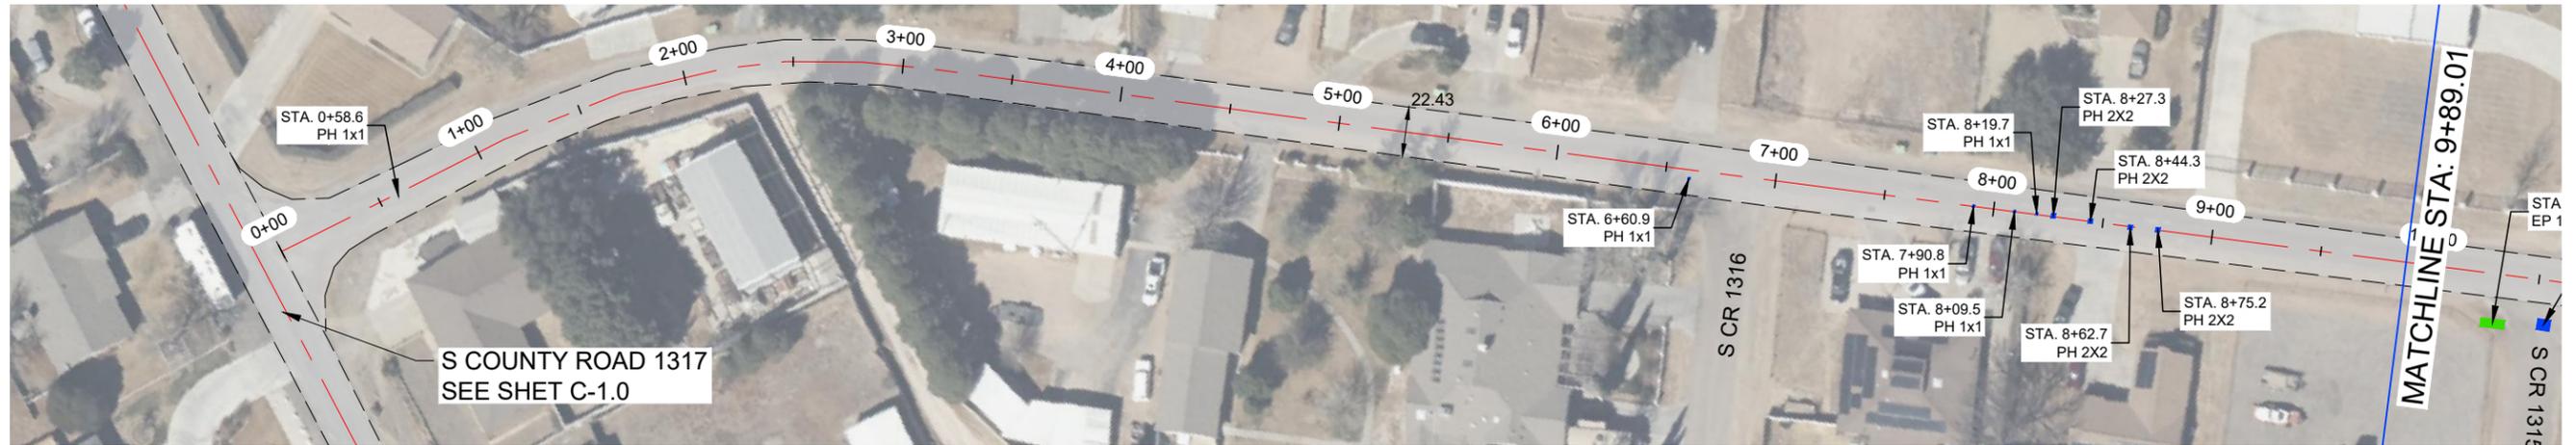

**W COUNTY ROAD 123-4**

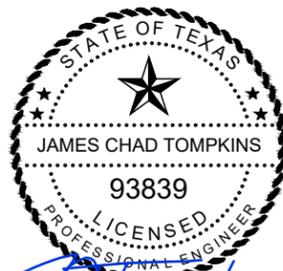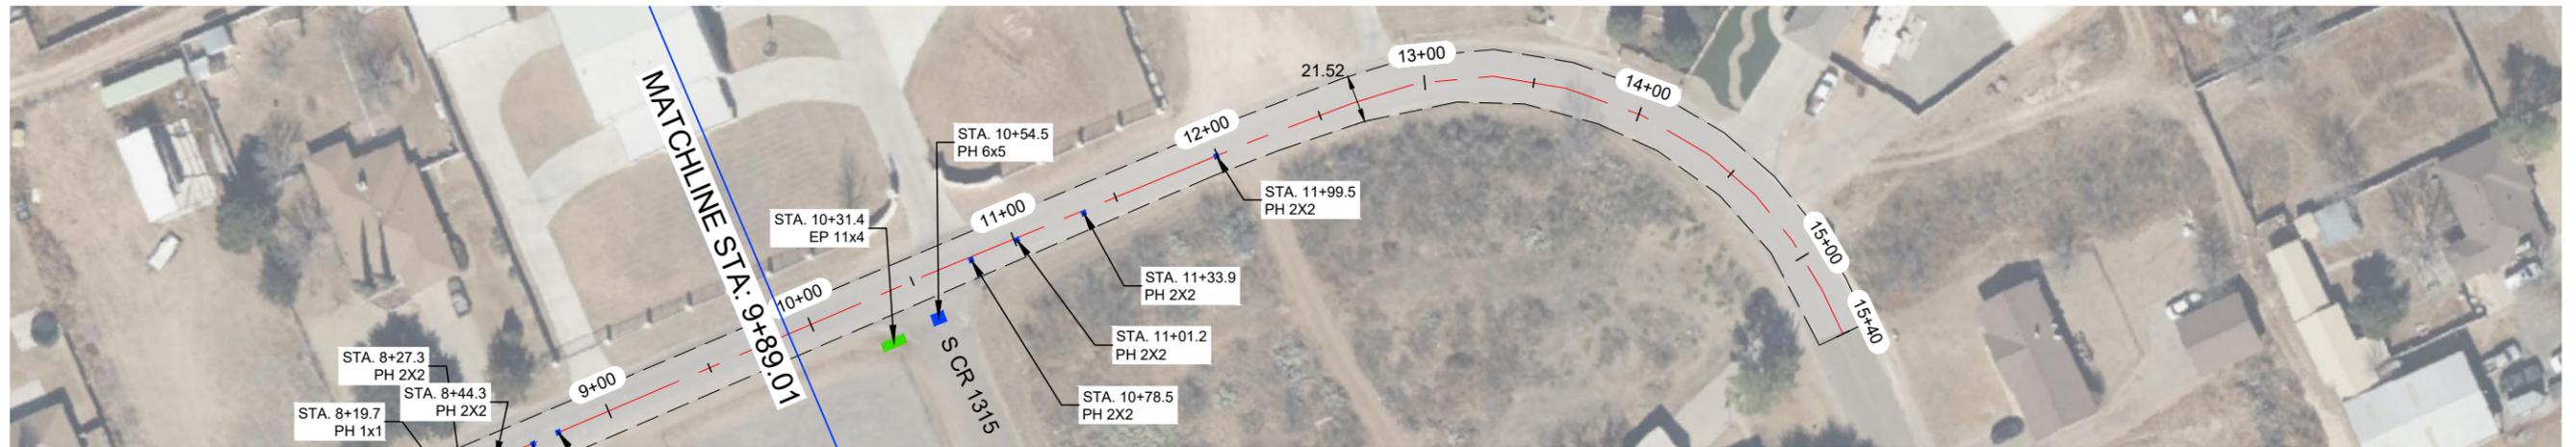

*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 123-4 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	3 808	SY	
2	STRIPING	1 490	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	7.4	SY	
2	EDGE PATCHING (BY OTHERS)	4.9	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545




TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
W COUNTY ROAD 123-4						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-3.0	

DATE: 3/22/24 10:58 AM DRAWN: I.R. CHECKED: J.C.T. PROJECT: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT SHEET: C-3.0 OF 3

W COUNTY ROAD 123-1

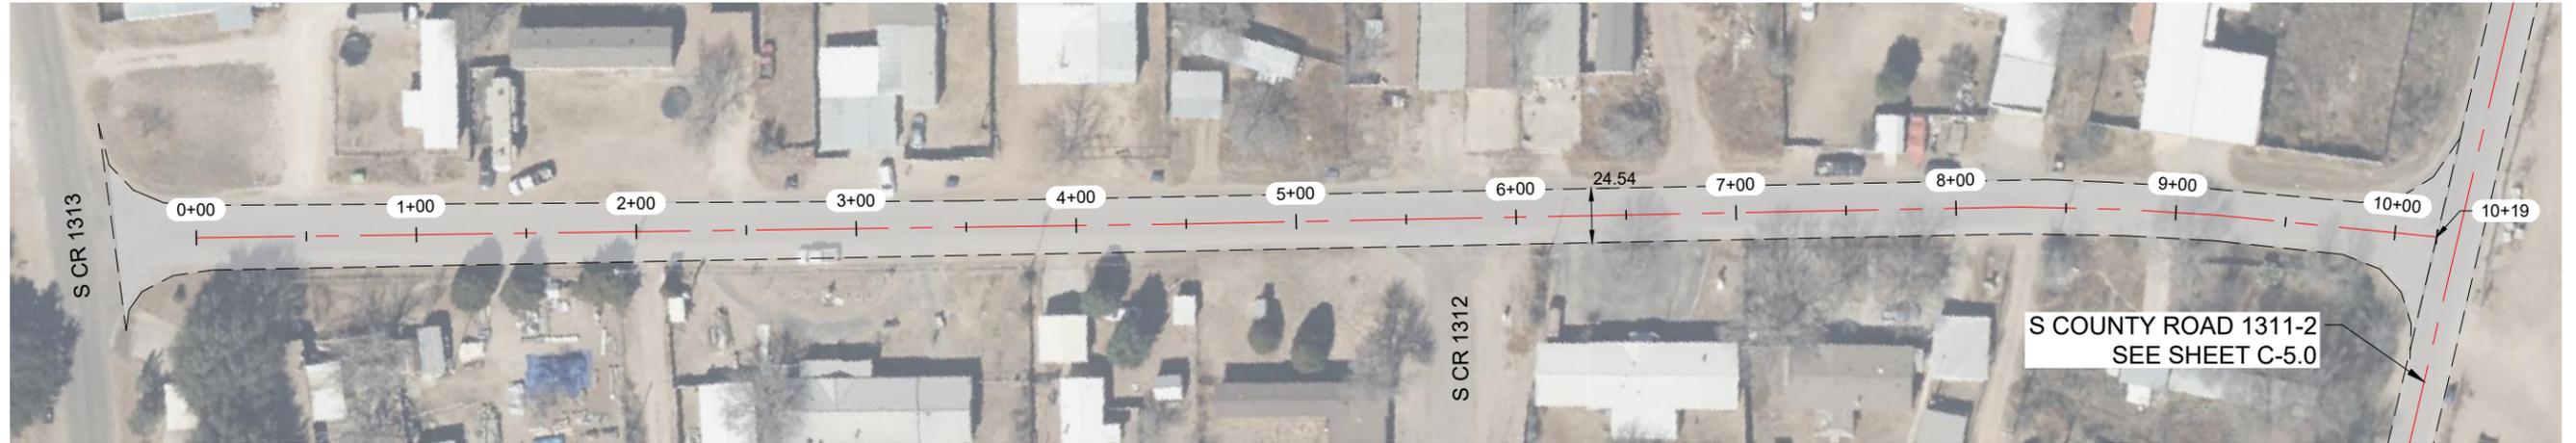


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

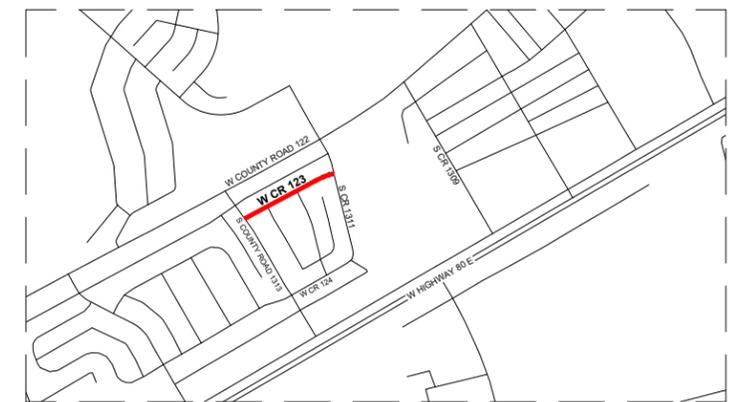

VICINITY MAP  
N.T.S.

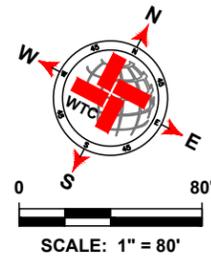

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 123-1 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	3 119	SY	
2	STRIPING	969	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.0	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
W COUNTY ROAD 123-1						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-4.0	



DATE: 3/22/24 10:58 AM DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT T&E C-4.0 W COUNTY ROAD 123-1 3/22/24 1:13 PM BGM/ERO



**S COUNTY ROAD 1309**



**S COUNTY ROAD 1309**

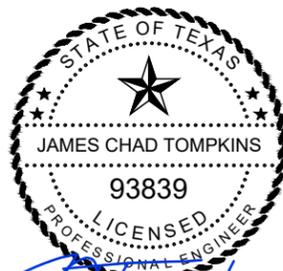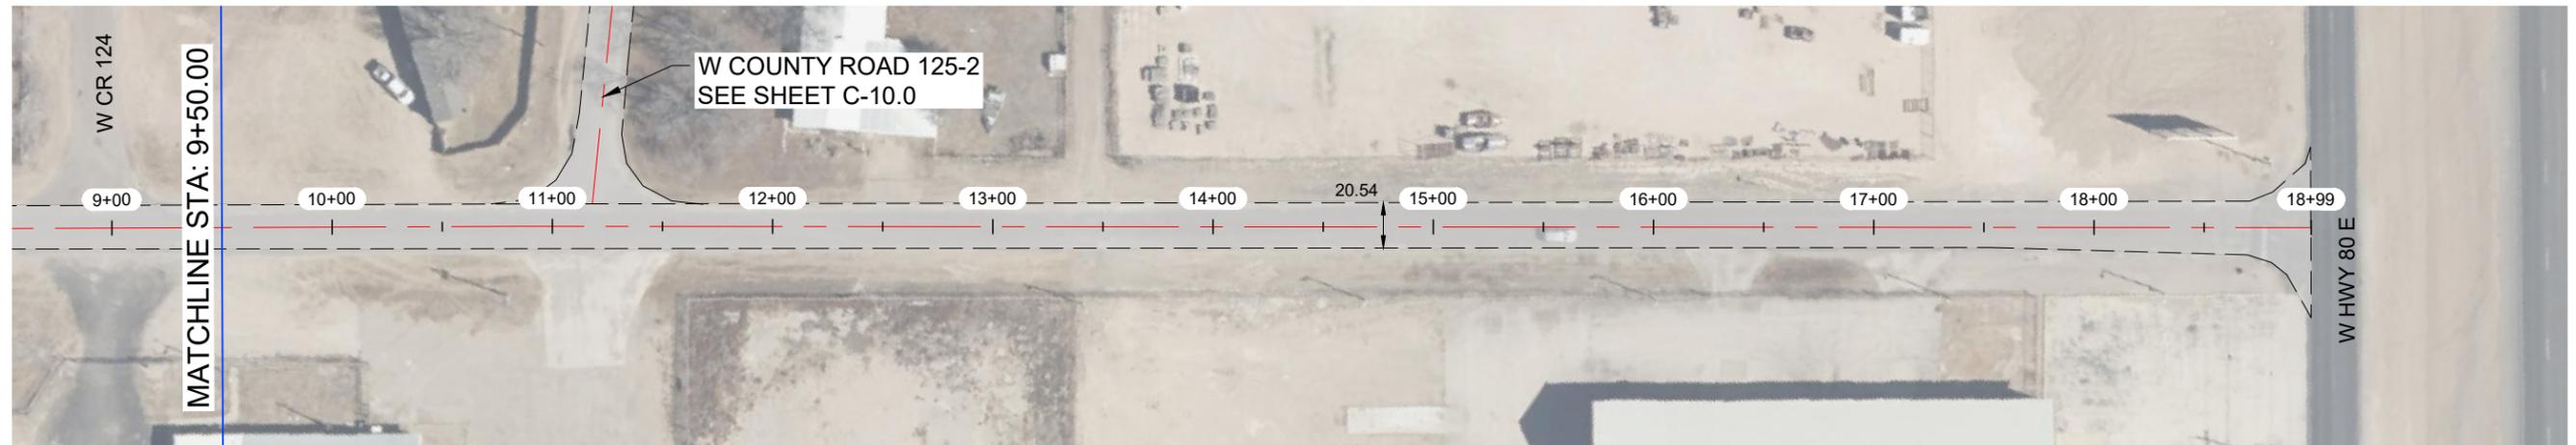


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

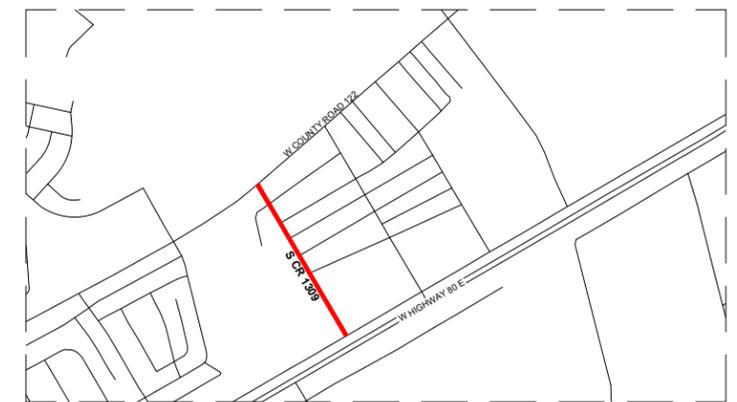

**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1309 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	4 512	SY	
2	STRIPING	1 849	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.0	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1309						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-6.0	


DATE: 3/22/24 10:58 AM DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\S COUNTY ROAD 1309\2024\312.PW RICHARD



**S COUNTY ROAD 1307**

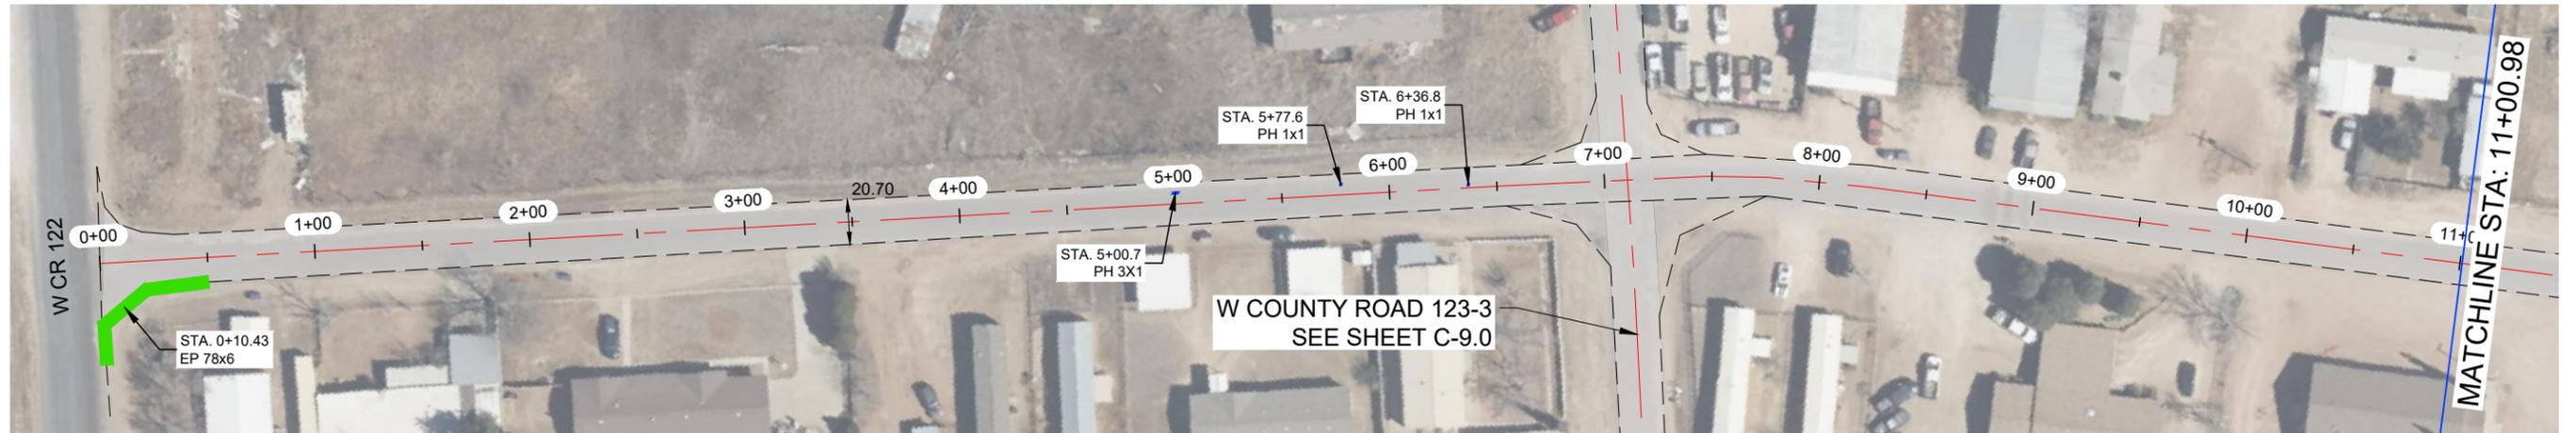

**S COUNTY ROAD 1307**


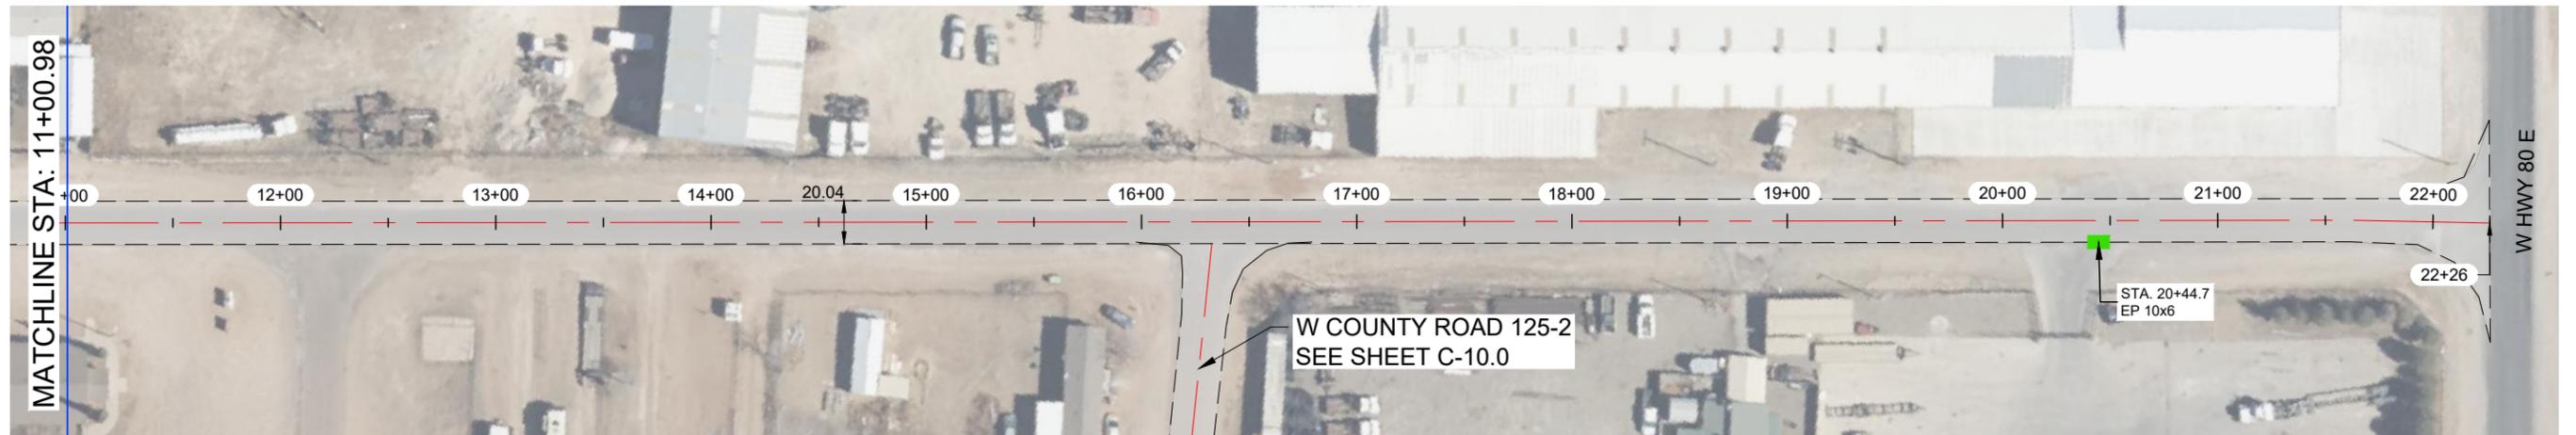


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

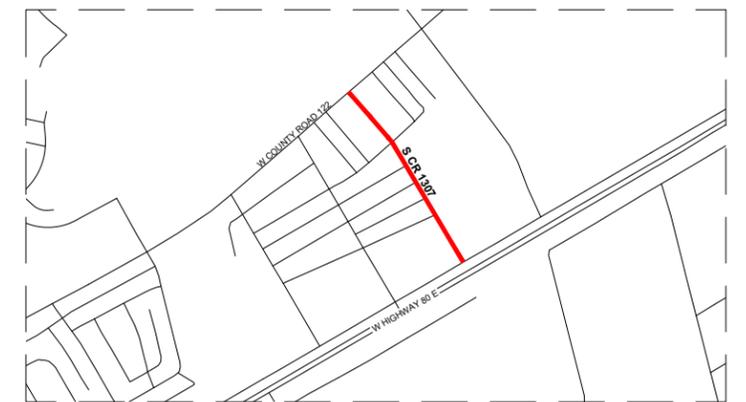

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1307 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5 137	SY	
2	STRIPING	2 176	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.6	SY	
2	EDGE PATCHING (BY OTHERS)	58.7	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE


LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.




MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1307						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-8.0	

DATE: 3/22/2024 11:58 AM DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\S COUNTY ROAD 1307\2024\3.13.PW.BCHM024

**W COUNTY ROAD 123-3**

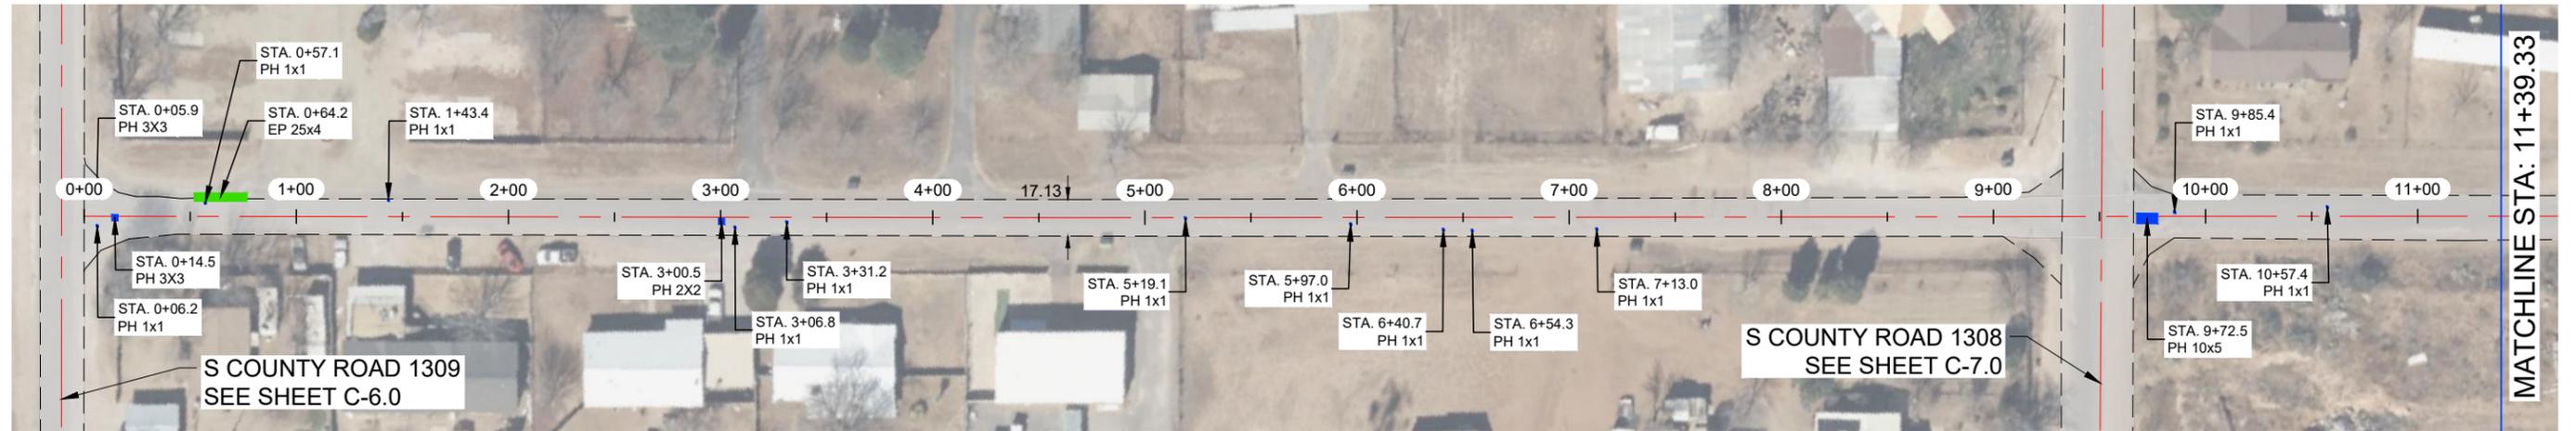

**W COUNTY ROAD 123-3**


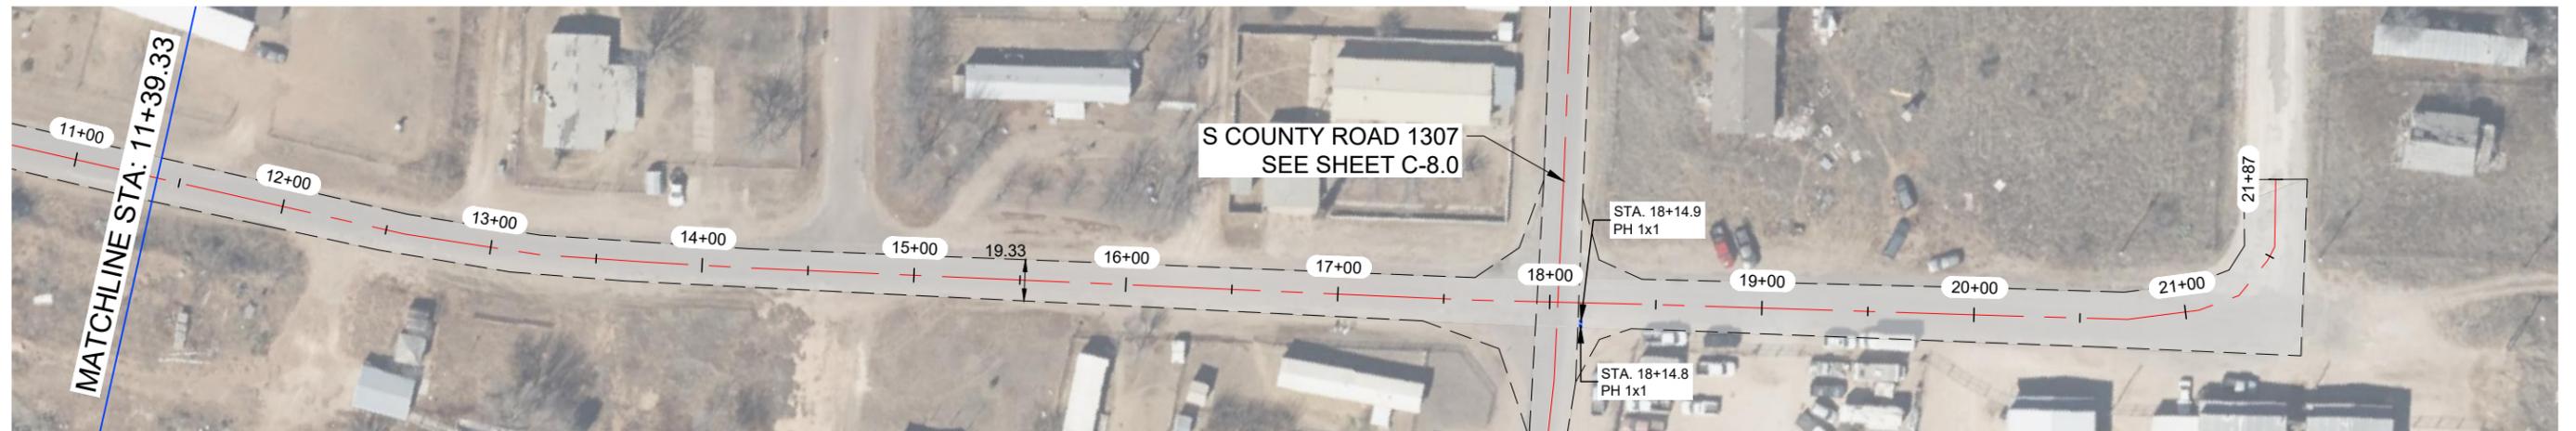


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

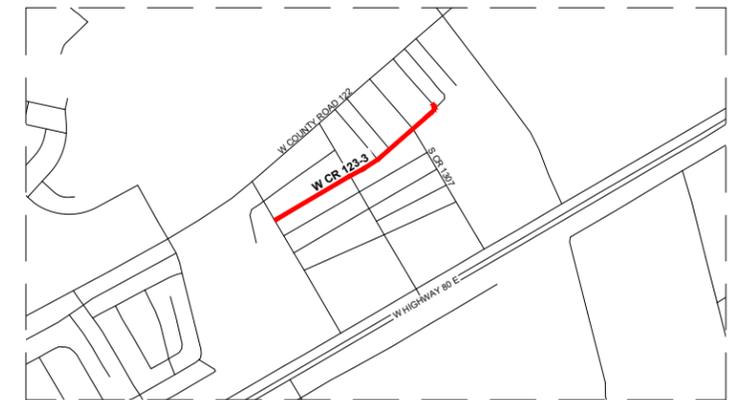

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 123-3 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	4 823	SY	
2	STRIPING	2 137	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	10.1	SY	
2	EDGE PATCHING (BY OTHERS)	11.1	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

**MIDLAND COUNTY, TEXAS**

2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

W COUNTY ROAD 123-3


DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-9.0

DATE: 3/22/24 10:58 AM DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\A\W COUNTY ROAD 123-3\2024\3.13 PM (MIDLAND)

**W COUNTY ROAD 125-2**



**W COUNTY ROAD 125-2**

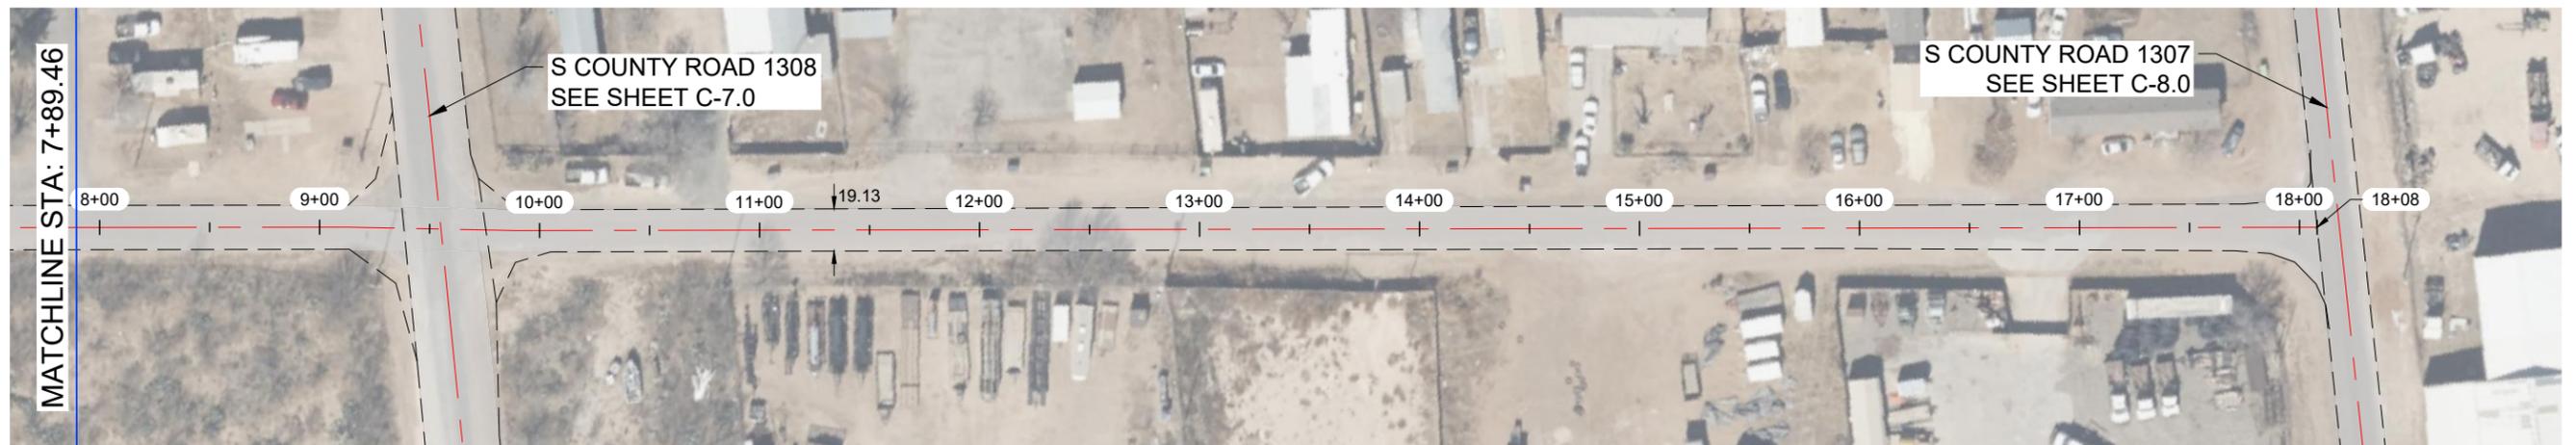


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

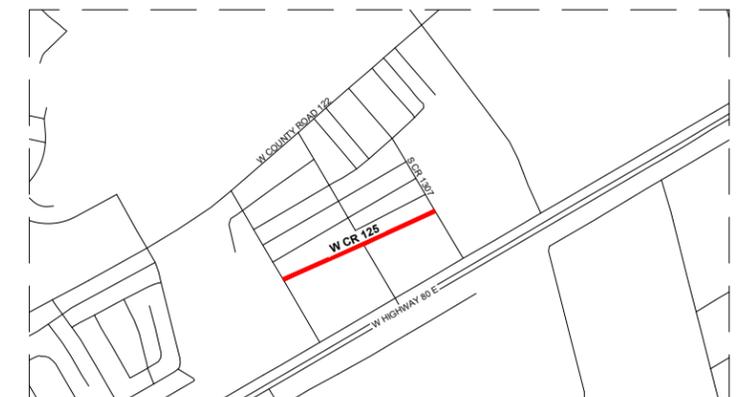

**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 125-2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	3 984	SY	
2	STRIPING	1 758	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.0	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	



**West Texas Consultants, Inc.**  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.




Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545  
TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM





MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
W COUNTY ROAD 125-2						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-10.0	

DATE: 3/22/24 10:58 AM DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\10\W COUNTY ROAD 125-2\2024\313.MXD

**S COUNTY ROAD 1305**

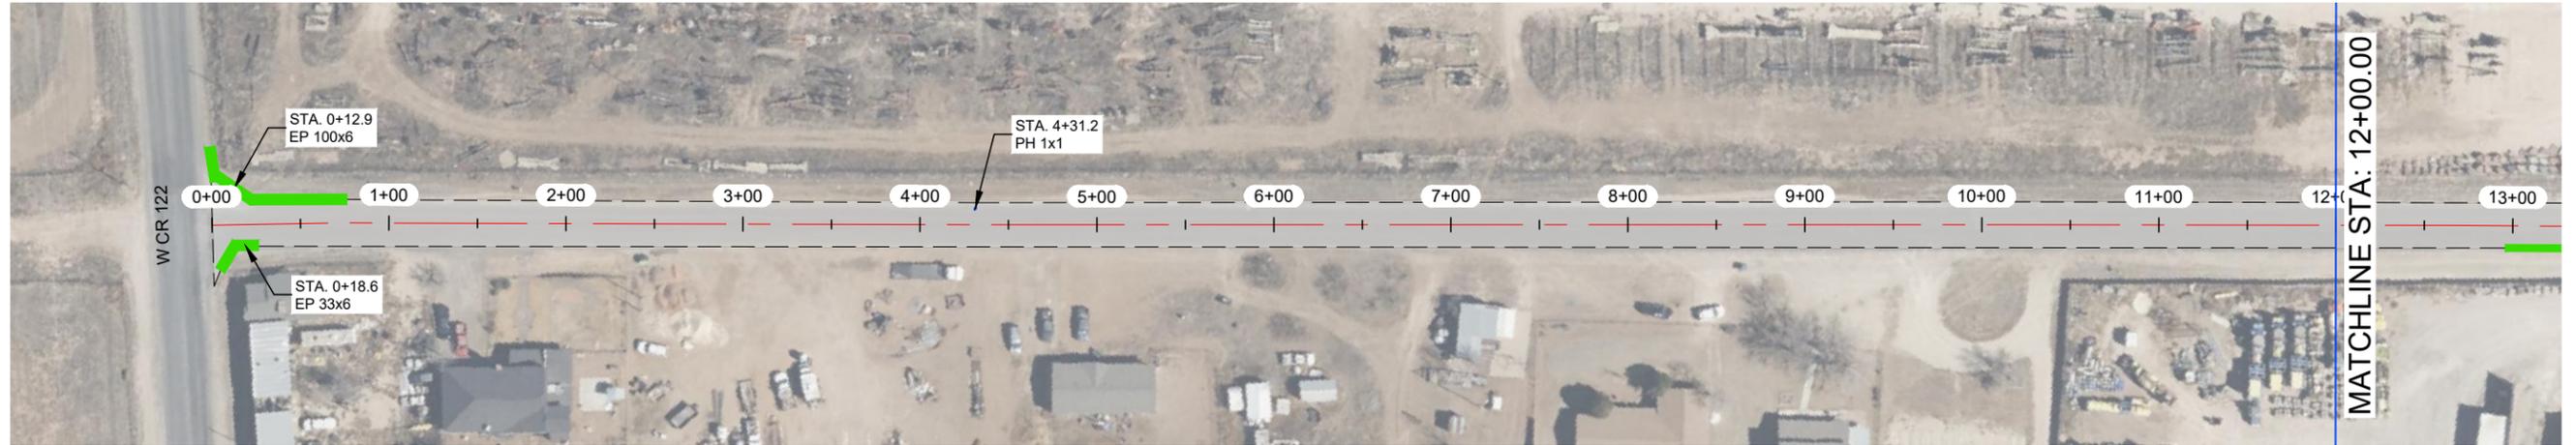

**S COUNTY ROAD 1305**


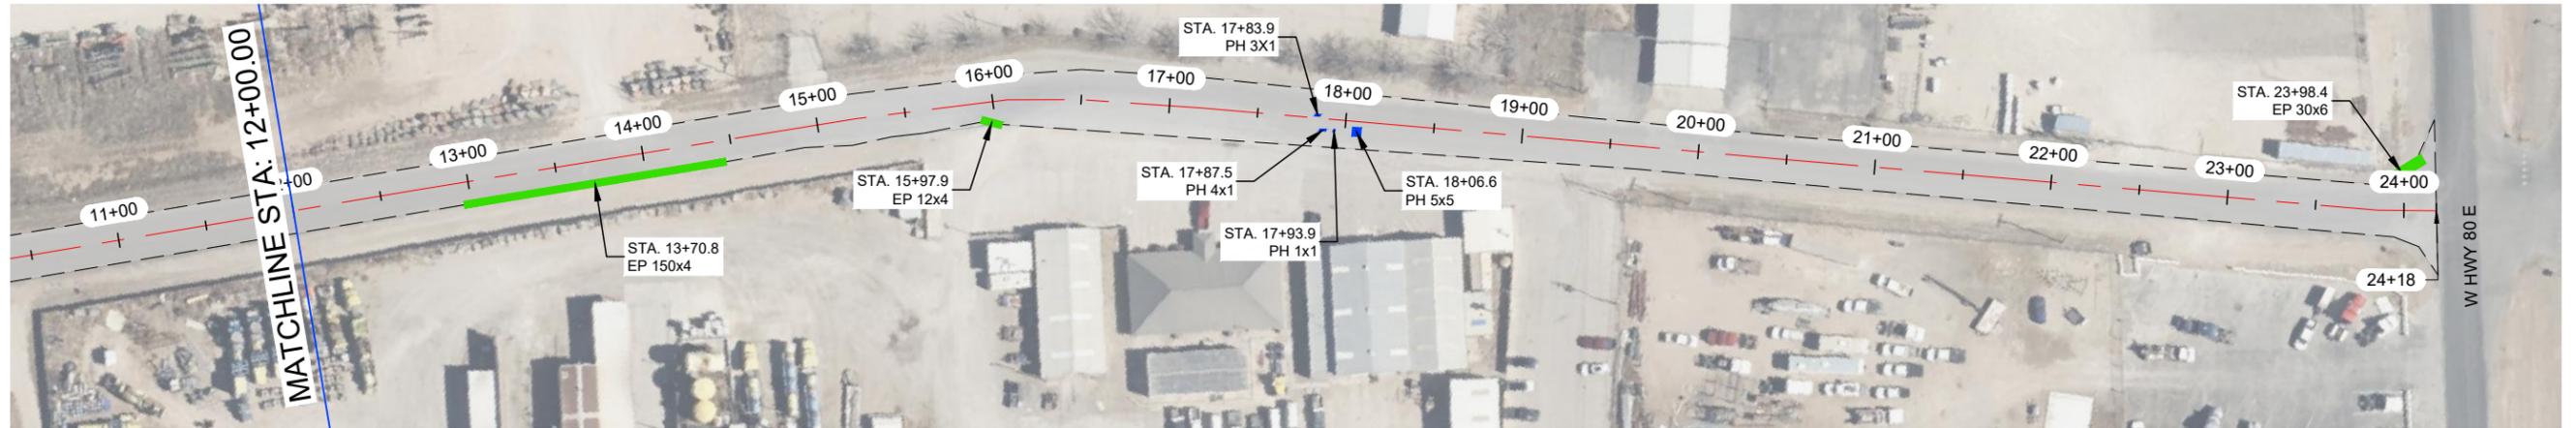


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

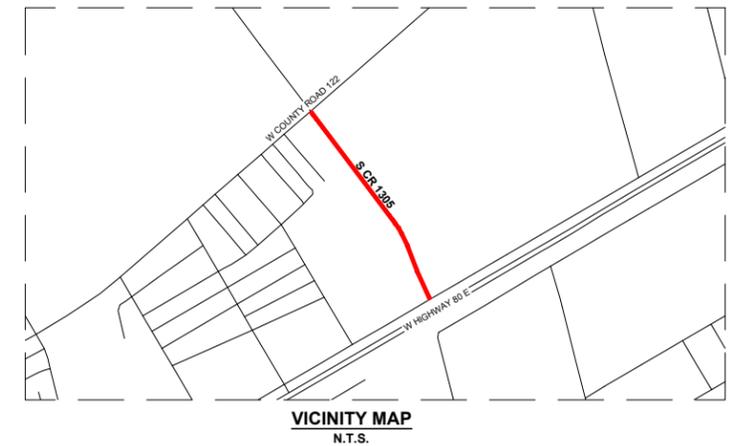

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1305 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	7 322	SY	
2	STRIPING	2 368	LF	
3	SOLID WHITE EDGE LINES	4 736	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	3.8	SY	
2	EDGE PATCHING (BY OTHERS)	180.7	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
S COUNTY ROAD 1305					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	C-11.0

DATE: X:\PROJECTS\ENGINEERING & SURVEYING\TEXAS\MIDLAND COUNTY PAVING\2024\MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT\TAB C-11.0 S COUNTY ROAD 1305\20240313.PAIR\M0000

W COUNTY ROAD 133-2


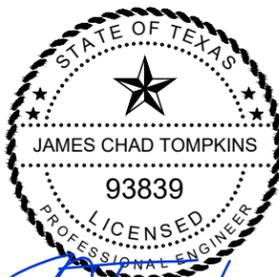


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

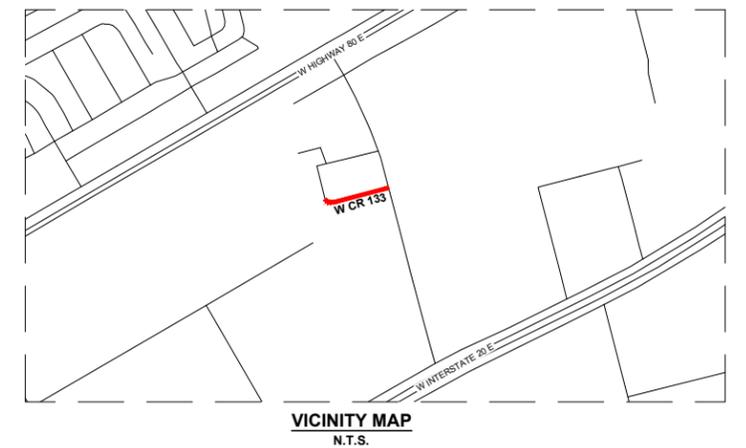

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 133-2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	3 141	SY	
2	STRIPING	670	LF	
3	SOLID WHITE EDGE LINES	1 340	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.4	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00



REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
W COUNTY ROAD 133-2						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-12.0	



S COUNTY ROAD 1305-1

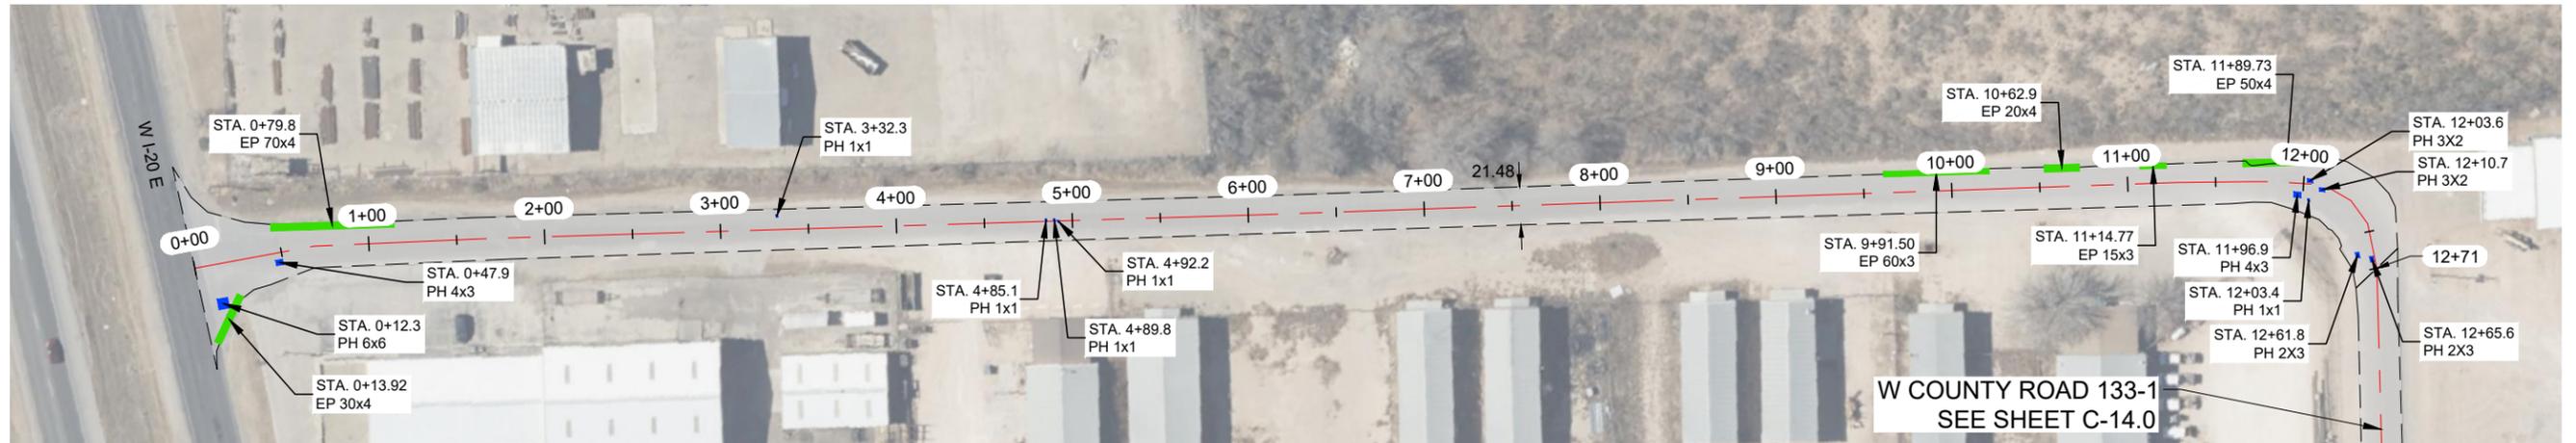

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

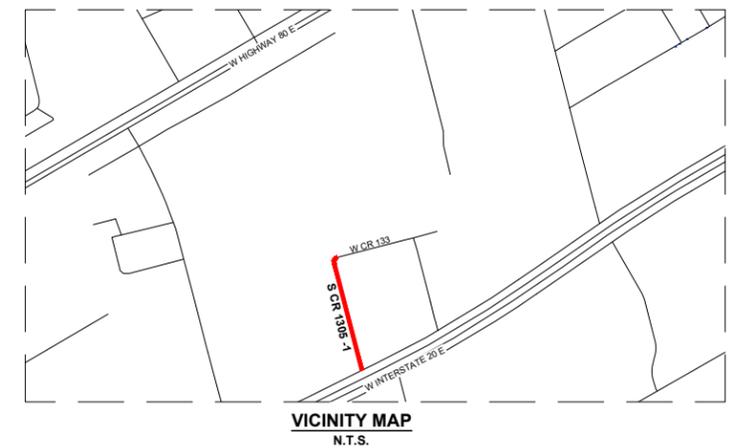

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1305-1 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	3 480	SY	
2	STRIPING	1 221	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	9.9	SY	
2	EDGE PATCHING (BY OTHERS)	100.6	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1305-1						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	C-13.0	

DATE: 3/22/24 10:58 AM PROJECT: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\S\COUNTY ROAD 1305-1\2024\2024-1313.DWG NUMBER: 1313

W COUNTY ROAD 133-1

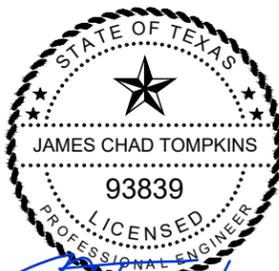
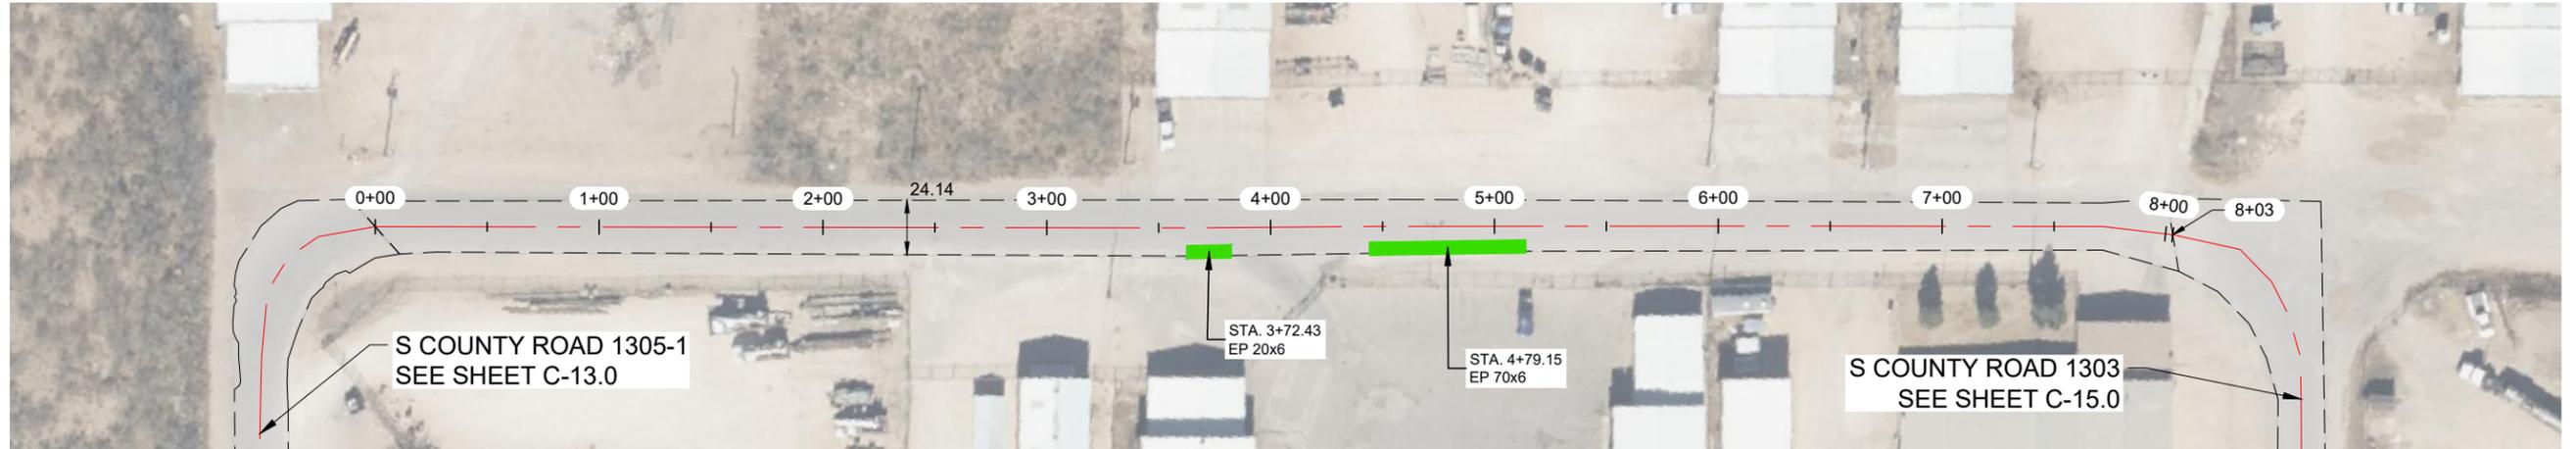


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

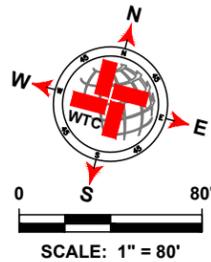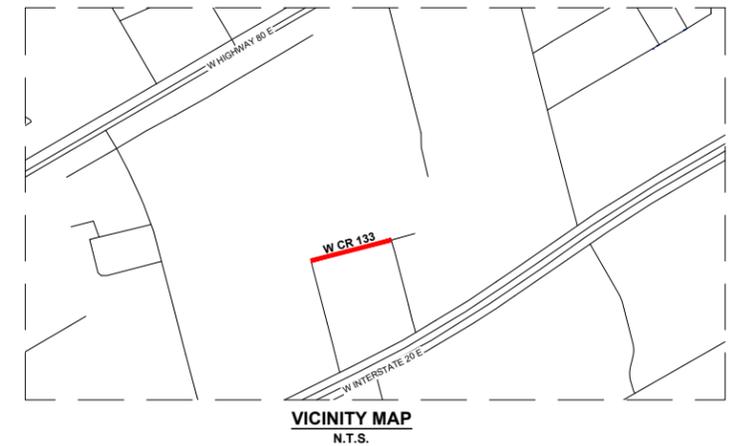

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 133-1 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	2 081	SY	
2	STRIPING	753	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.0	SY	
2	EDGE PATCHING (BY OTHERS)	60.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.



CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
W COUNTY ROAD 133-1					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-14.0

# S COUNTY ROAD 1303

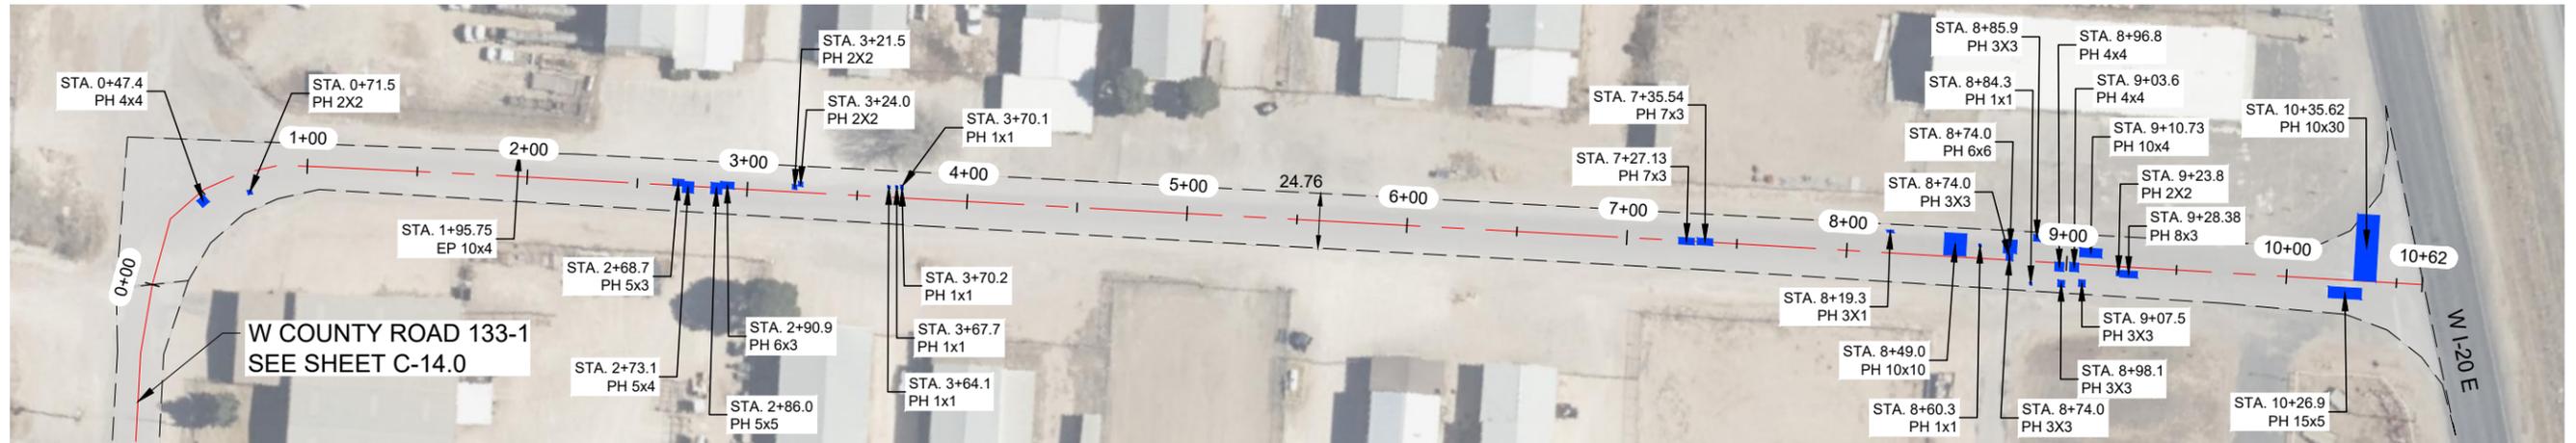


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1303 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	3 238	SY	
2	STRIPING	1 012	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	94.3	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1303						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-15.0	

DATE: 3/22/24 11:58 AM PROJECT: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT SHEET: C-15.0 OF 15.0

**S COUNTY ROAD 1300**



**S COUNTY ROAD 1300**

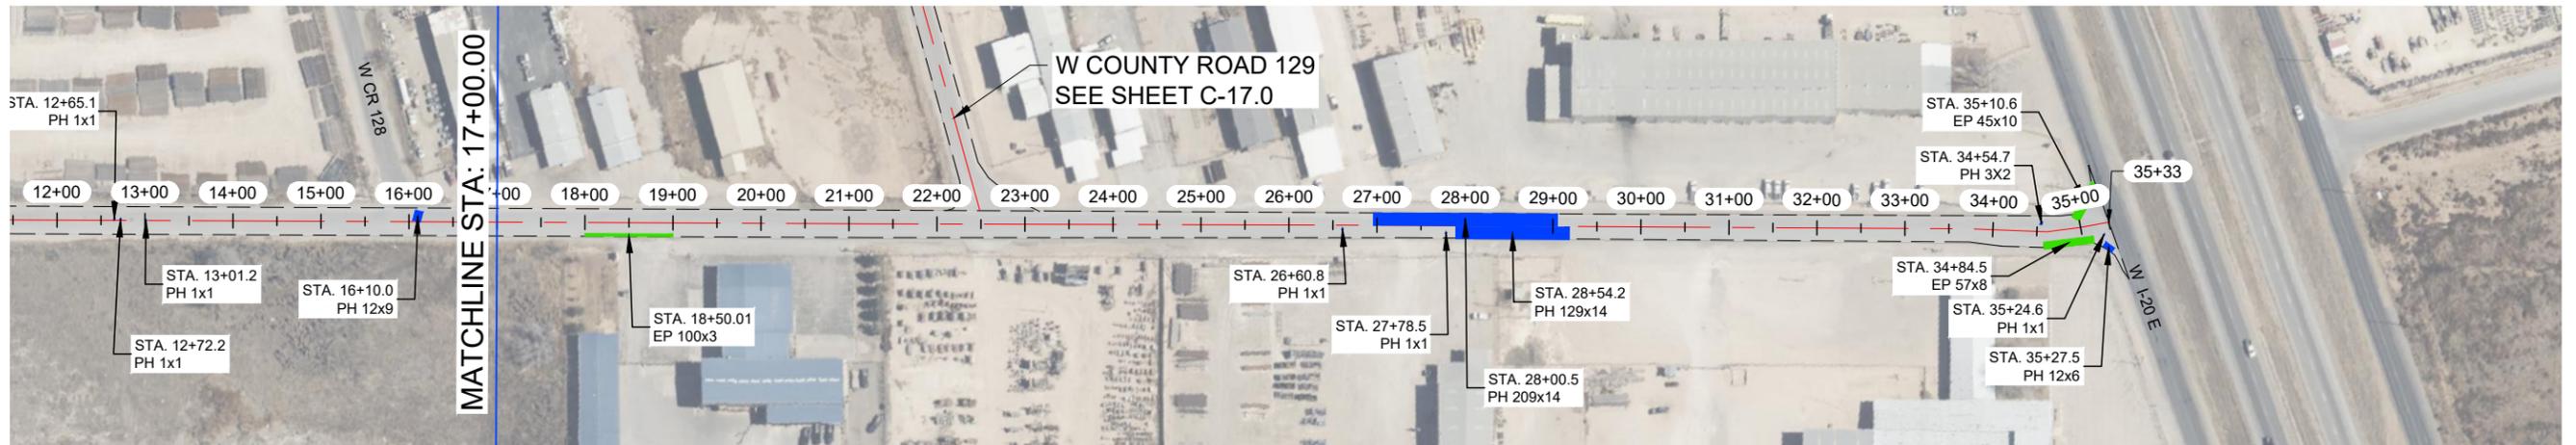


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1300 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	11 802	SY	
2	STRIPING	3 483	LF	
3	SOLID WHITE EDGE LINES	6 965	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	550.6	SY	
2	EDGE PATCHING (BY OTHERS)	212.7	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

**MIDLAND COUNTY, TEXAS**

**2024 MIDLAND PAVEMENT MAINTENANCE PROJECT**



**S COUNTY ROAD 1300**

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 200'	C-16.0

**W COUNTY ROAD 129**



**W COUNTY ROAD 129**

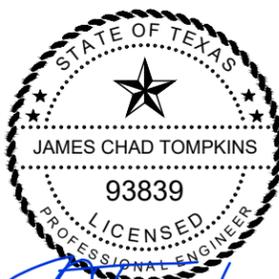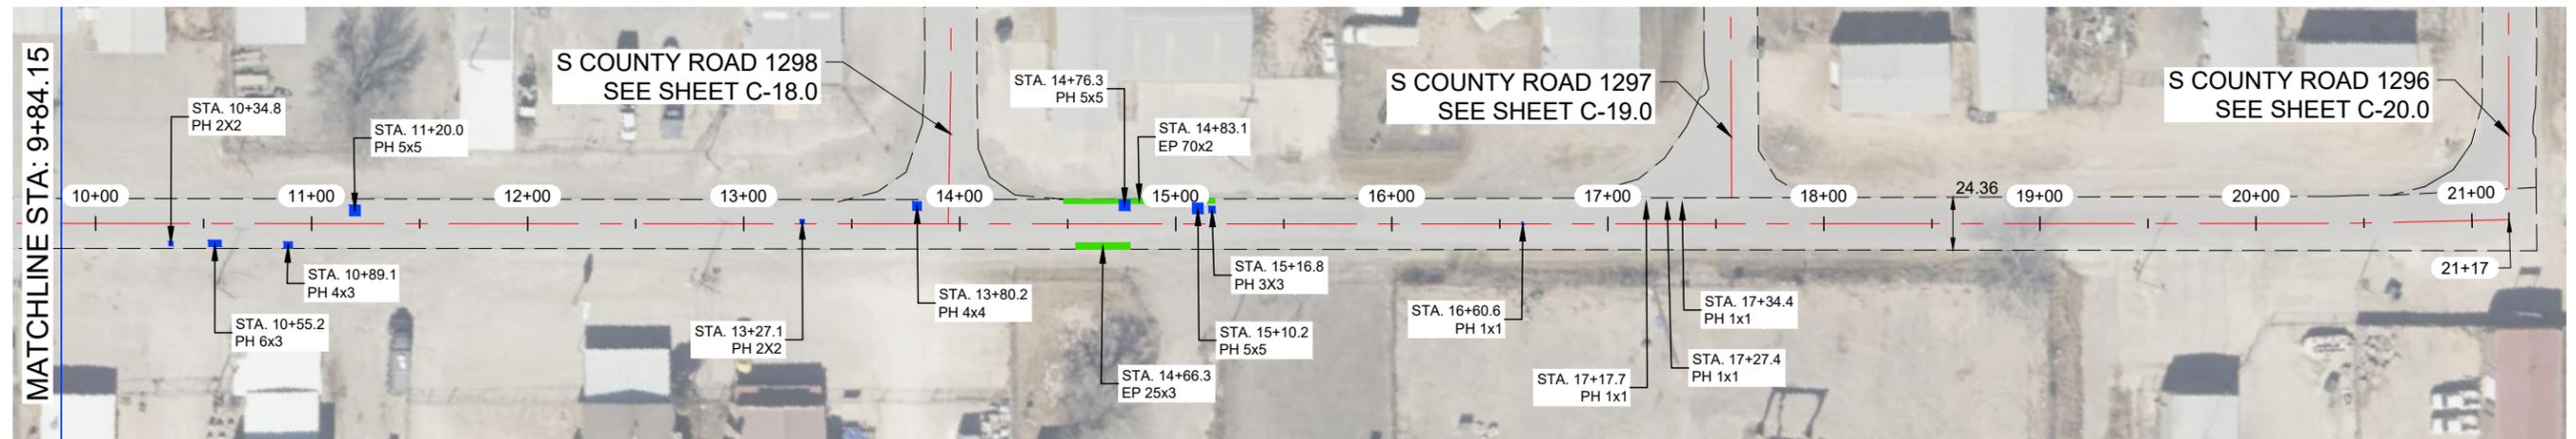


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 129 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5 807	SY	
2	STRIPING	2 067	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	436.7	SY	
2	EDGE PATCHING (BY OTHERS)	23.9	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545



TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
W COUNTY ROAD 129					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-17.0

DATE: 3/22/24 11:58 AM DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT TBL C-17.0 W COUNTY ROAD 129 3/22/24 11:58 AM RCH/EDR



**S COUNTY ROAD 1297**

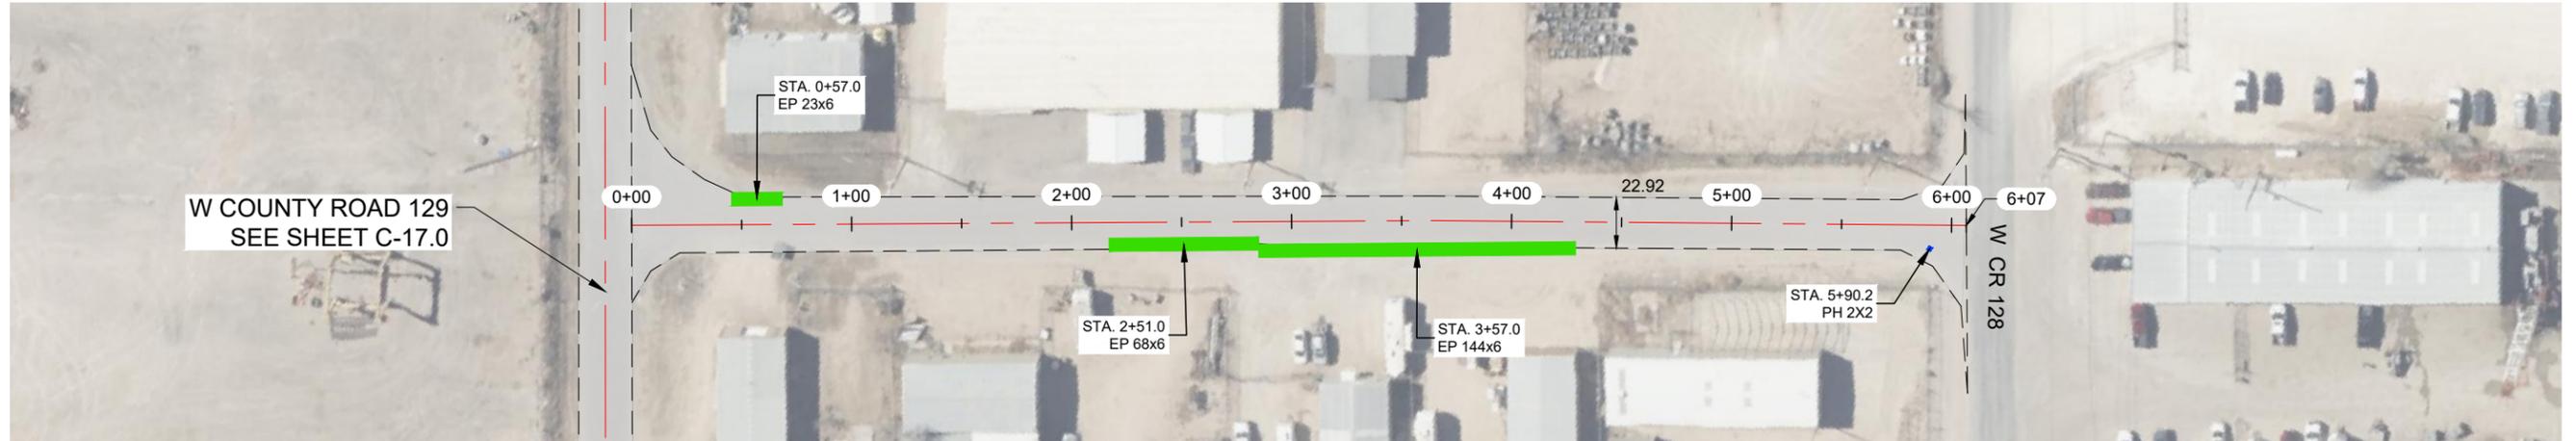


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

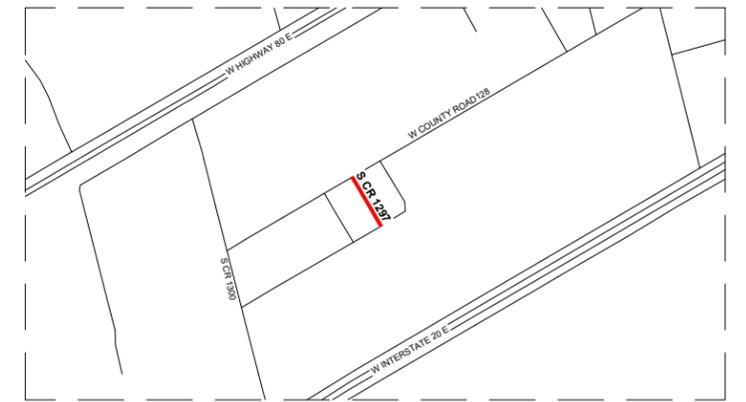

**VICINITY MAP**  
N.T.S.



SCALE: 1" = 80'

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1297 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	1 745	SY	
2	STRIPING	557	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.4	SY	
2	EDGE PATCHING (BY OTHERS)	156.7	SY	



**West Texas Consultants, Inc.**  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
S COUNTY ROAD 1297					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-19.0



DATE: 3/22/24 10:58 AM DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT T.M.C. 1818 S COUNTY ROAD 1297 3/22/2024 1:18 PM RDM/ERO



S COUNTY ROAD 1290

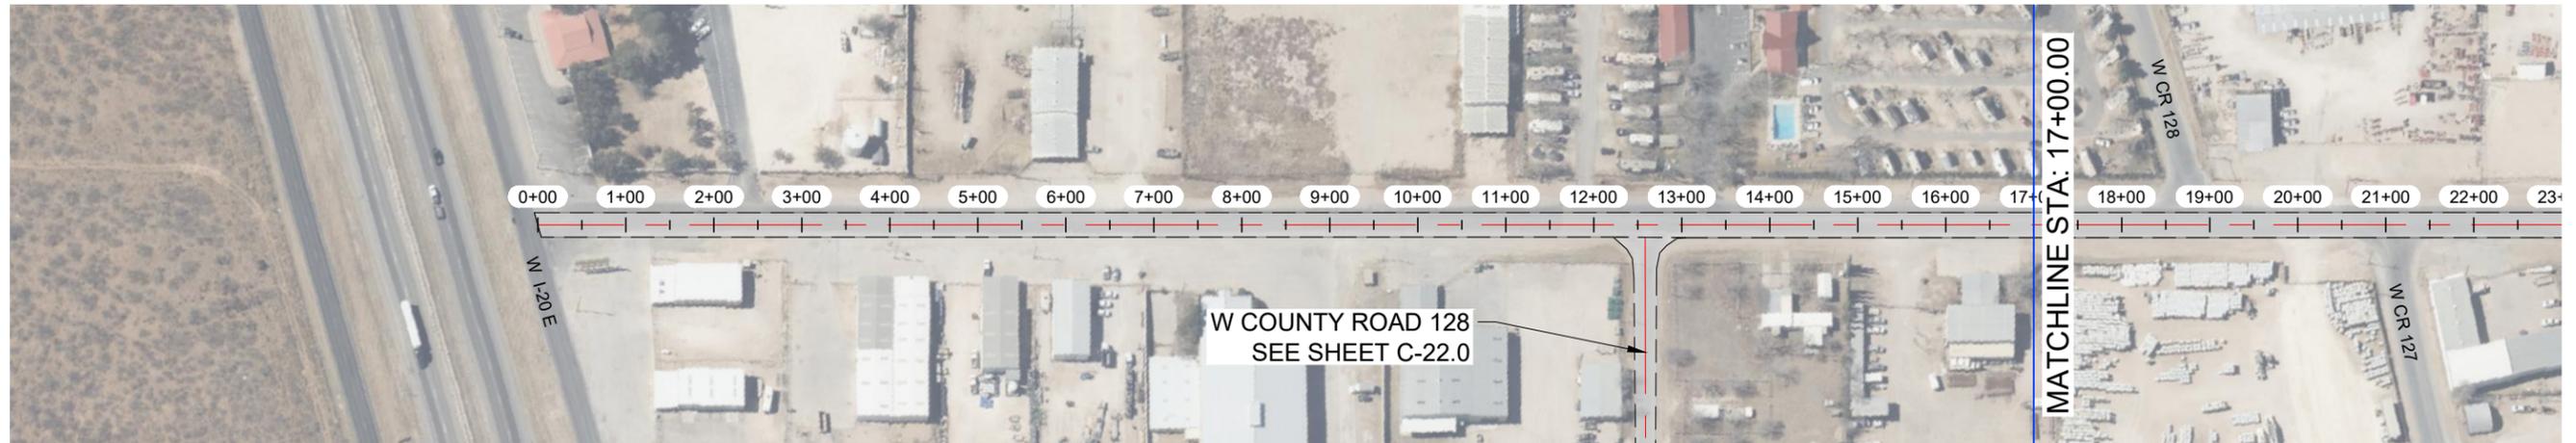

S COUNTY ROAD 1290

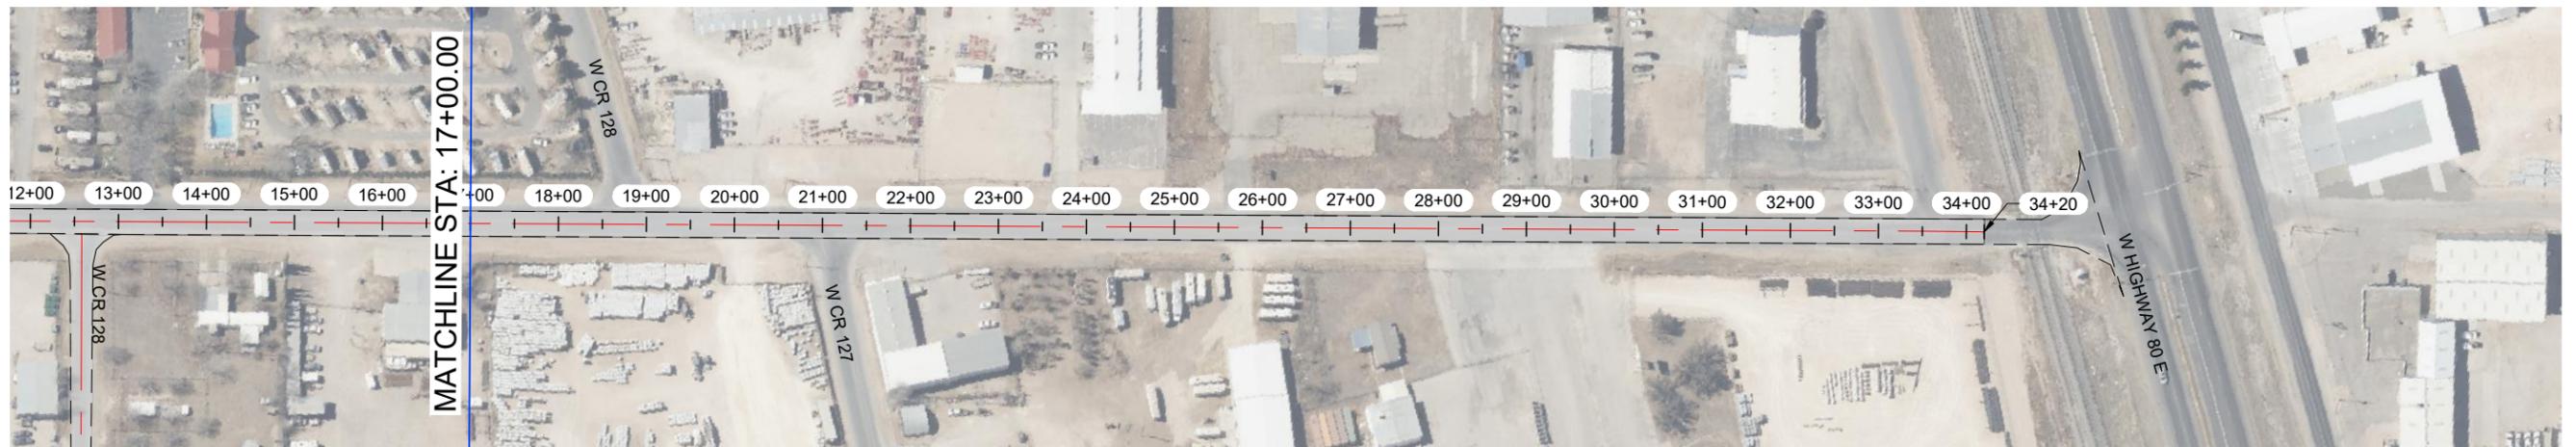


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1290 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	10 726	SY	
2	STRIPING	3 370	LF	
3	SOLID WHITE EDGE LINES	6 740	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.0	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
S COUNTY ROAD 1290					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 200'	C-21.0

DRAWN BY: J. TOMPKINS, ENGINEERING & SURVEYING; CHECKED BY: J. TOMPKINS, ENGINEERING & SURVEYING; DATE: 3/22/24; PROJECT: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT; SHEET: C-21.0

W COUNTY ROAD 128



W COUNTY ROAD 128


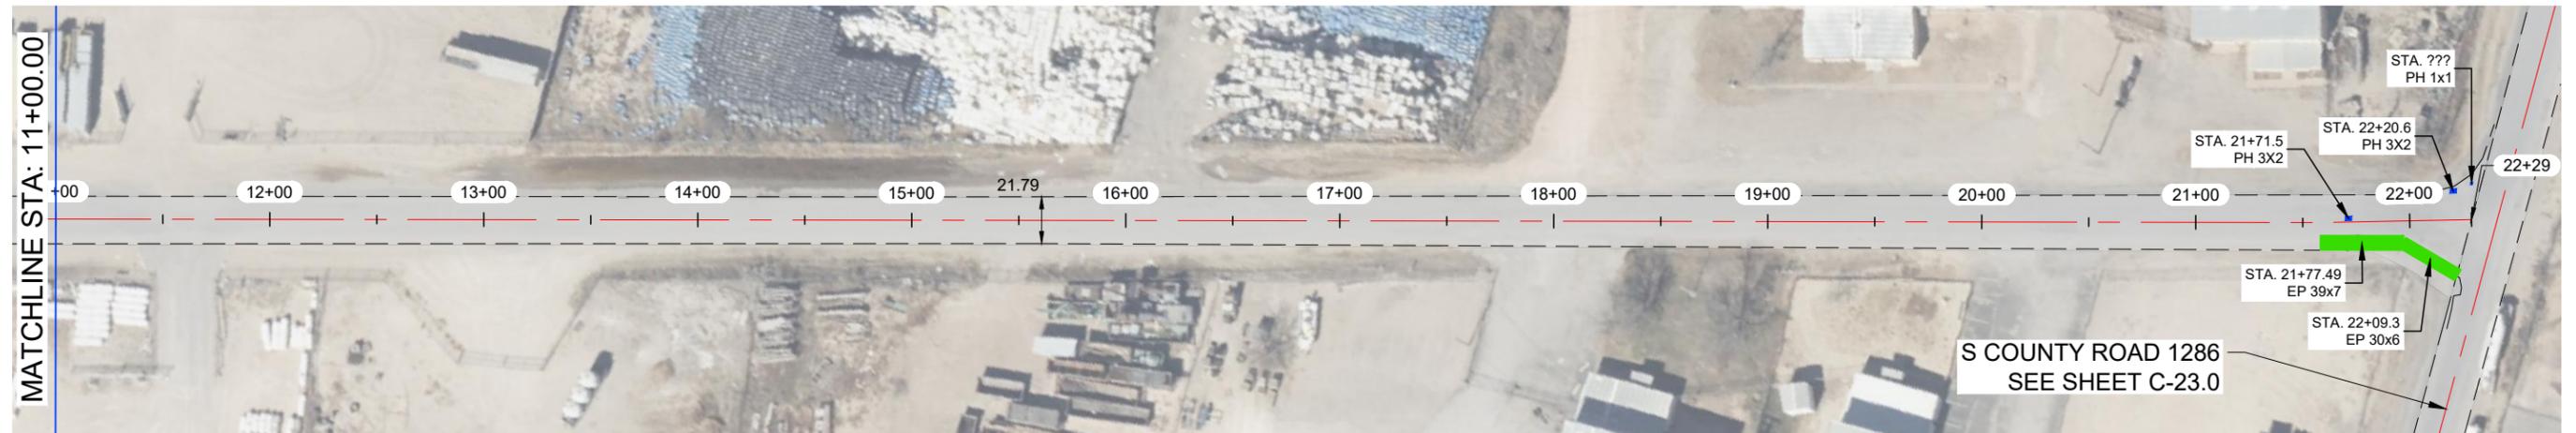


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

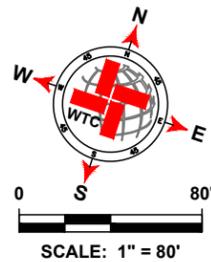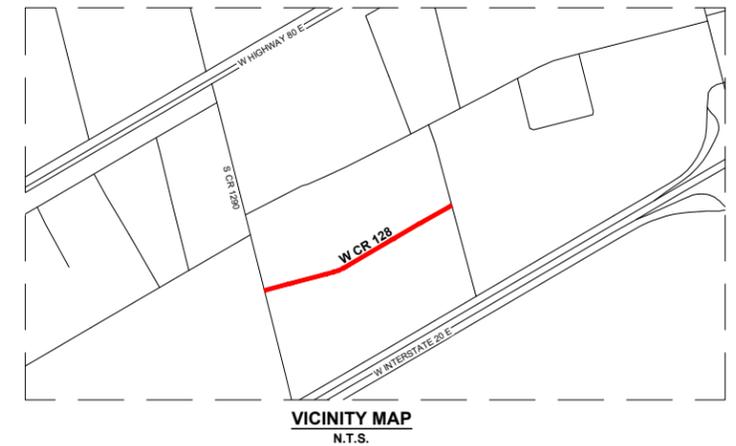

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 128 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5 695	SY	
2	STRIPING	2 179	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	1.4	SY	
2	EDGE PATCHING (BY OTHERS)	50.3	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
W COUNTY ROAD 128						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-22.0	

DATE: 3/22/2024 11:14 AM PROJECT: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\2024\W COUNTY ROAD 128\2024-1-14.PW.BROKER

**S COUNTY ROAD 1286**




**S COUNTY ROAD 1286**

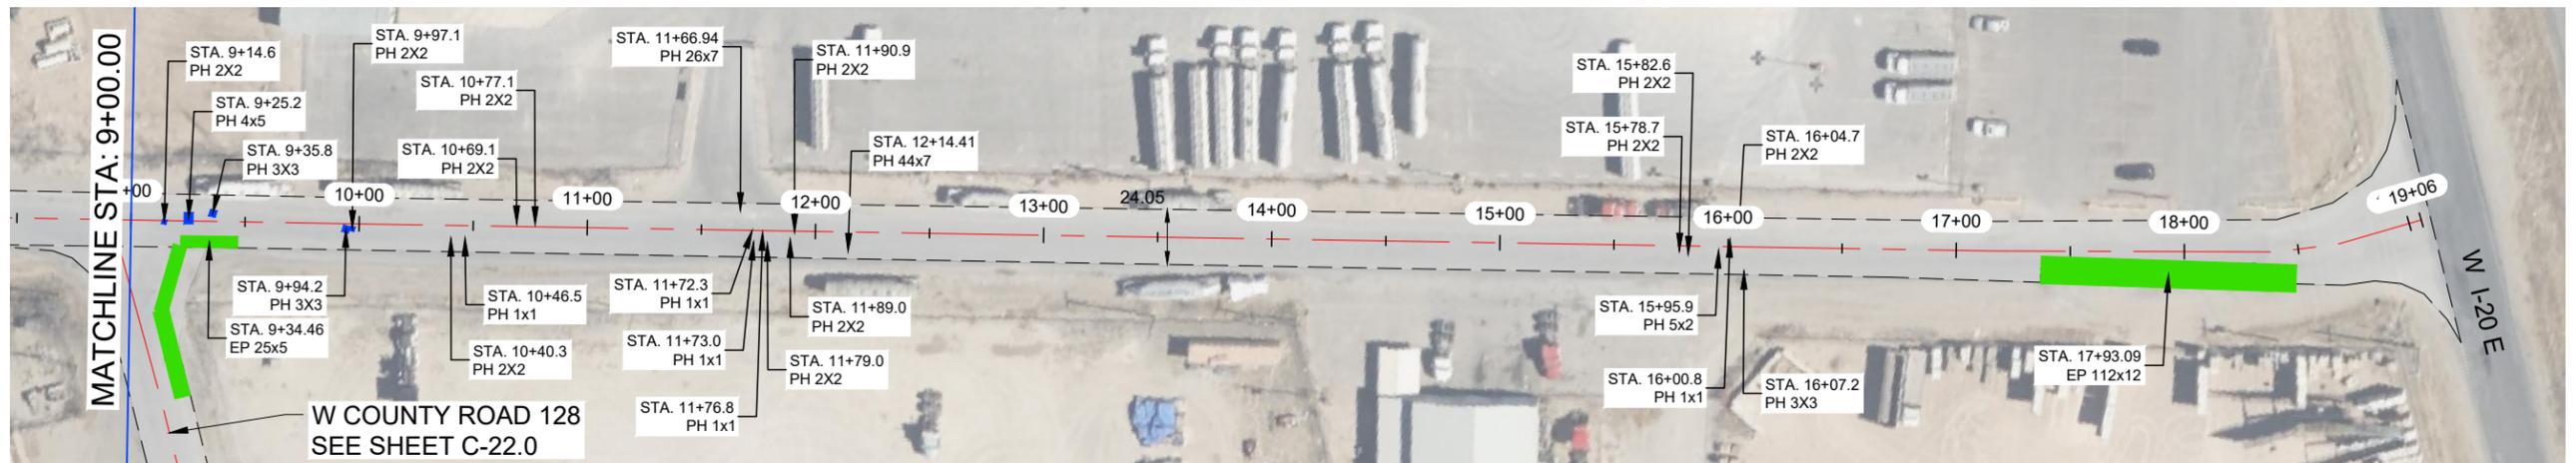


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

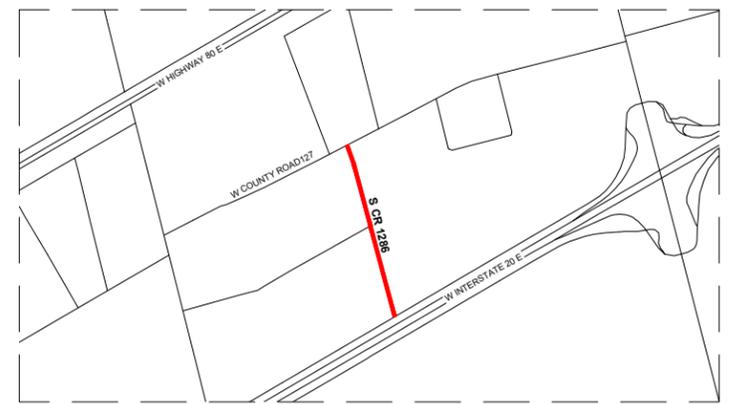

**VICINITY MAP**  
N.T.S.

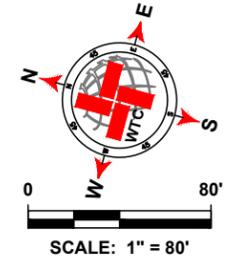

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1286 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5 540	SY	
2	STRIPING	1 856	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	66.6	SY	
2	EDGE PATCHING (BY OTHERS)	163.2	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM


**MIDLAND COUNTY, TEXAS**

2024 MIDLAND PAVEMENT MAINTENANCE PROJECT


S COUNTY ROAD 1286

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-23.0

**S COUNTY ROAD 1286-2**

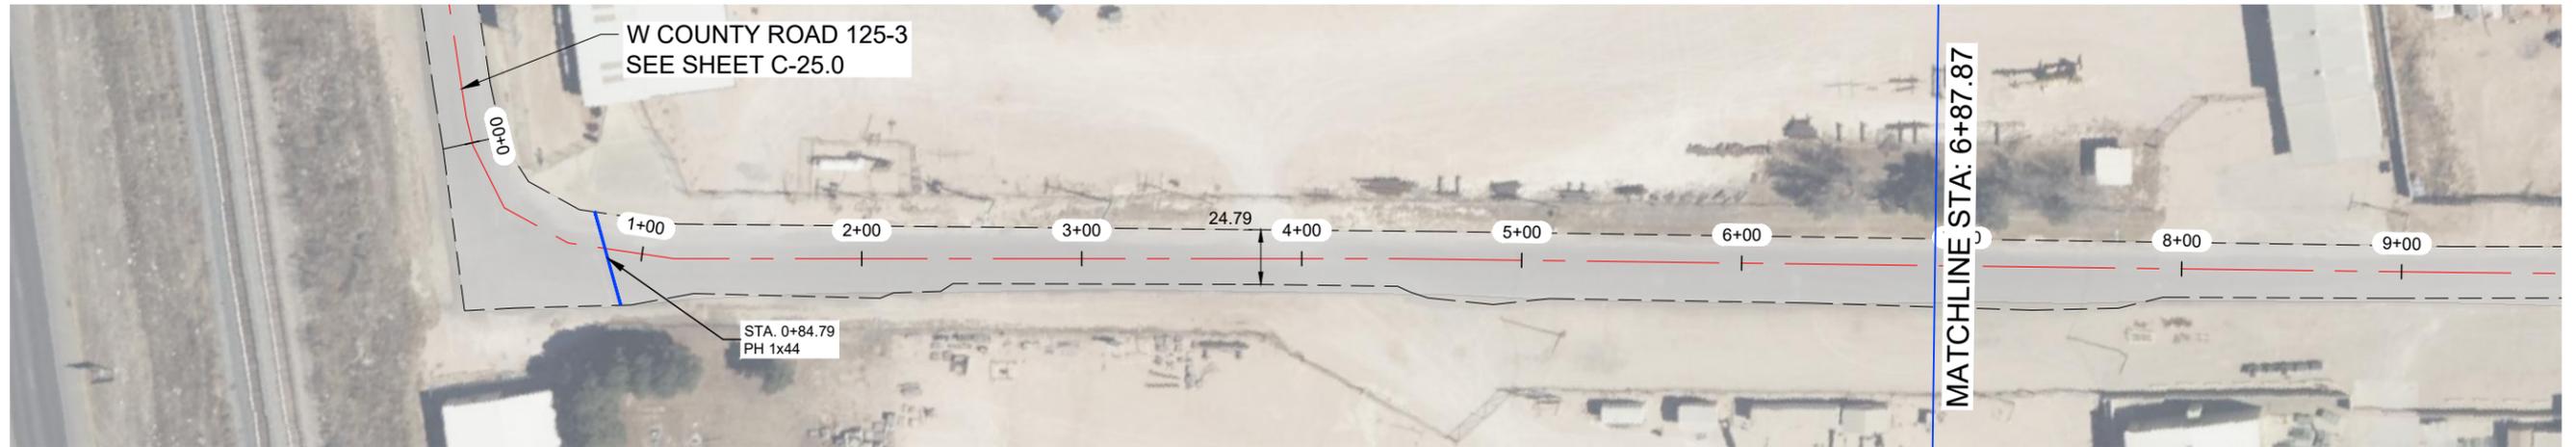

**S COUNTY ROAD 1286-2**

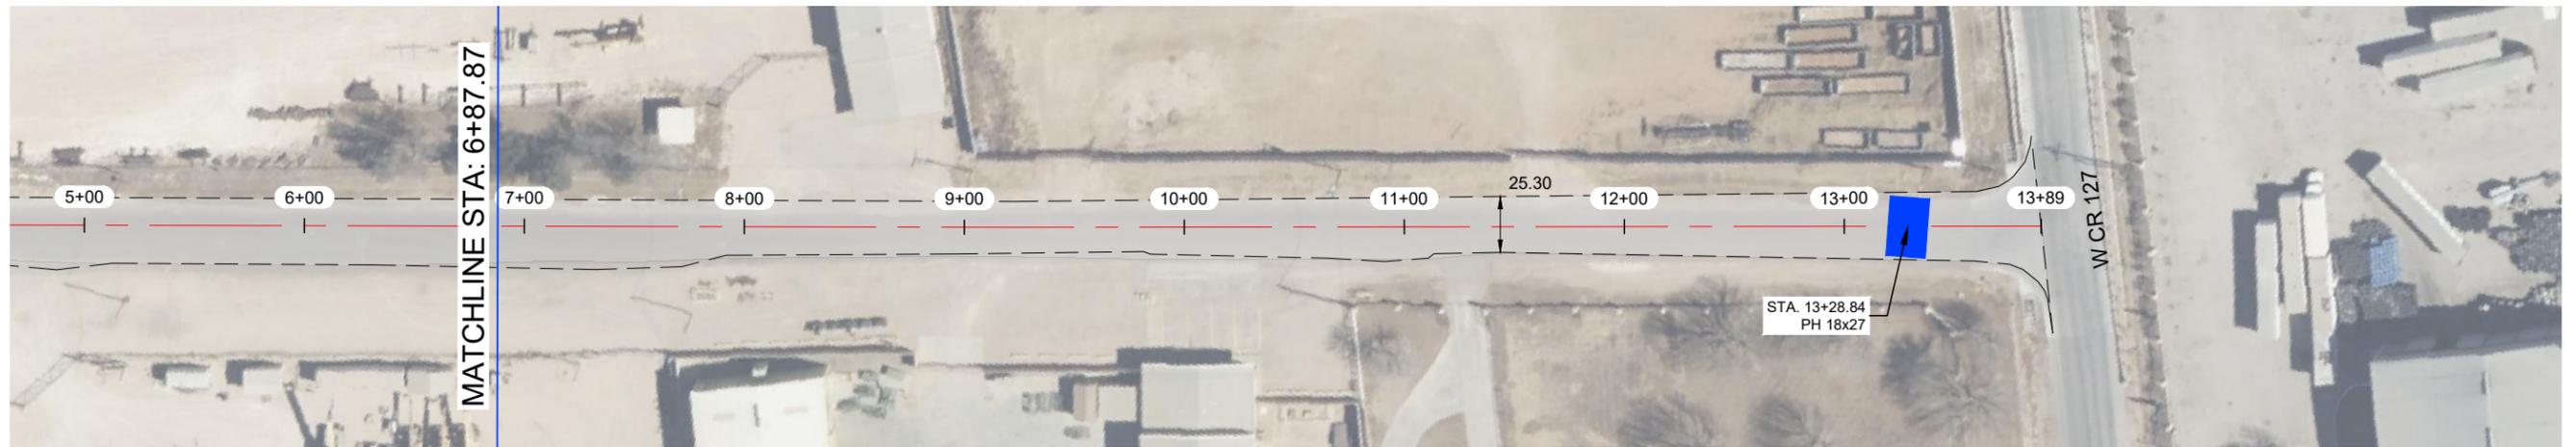


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

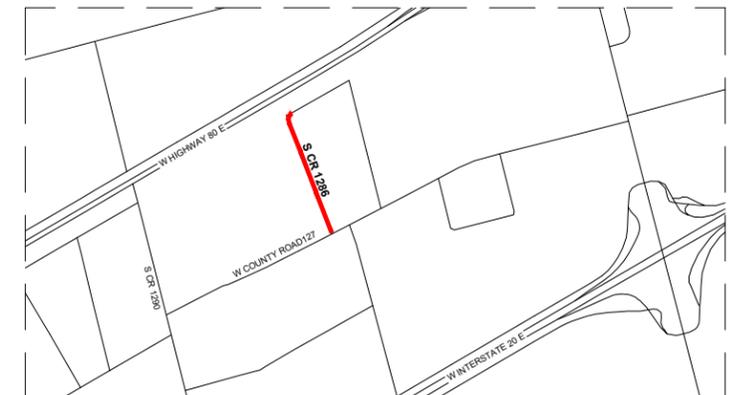

**VICINITY MAP**  
N.T.S.

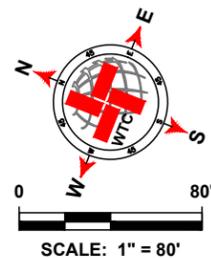

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1286-2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	4 607	SY	
2	STRIPING	1 339	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	58.9	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1286-2						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-24.0	

DATE: 3/22/24 11:51 AM DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\A\15 COUNTY ROAD 1286-2\2024\1515.MXD

**W COUNTY ROAD 125-3**

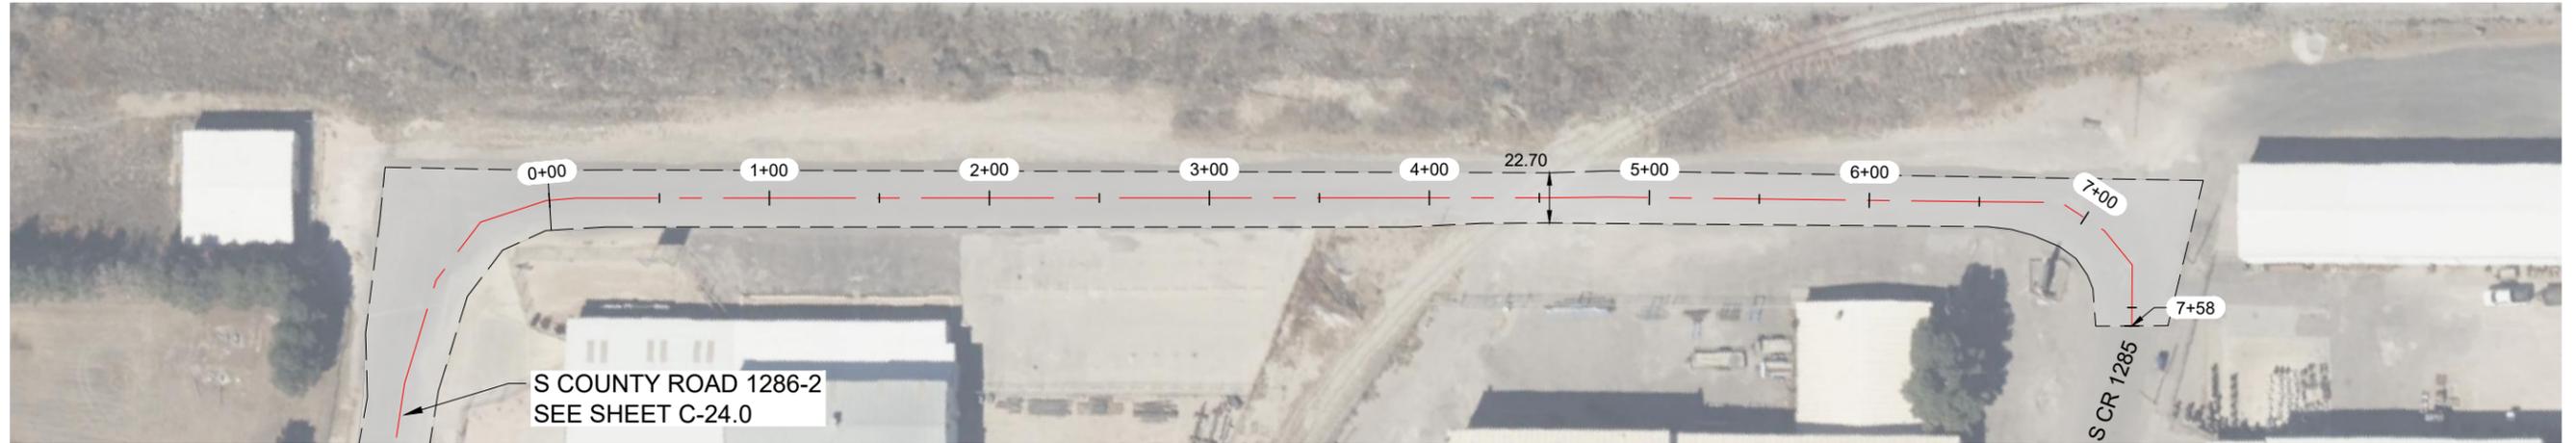

*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 125-3 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	2 247	SY	
2	STRIPING	708	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.0	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	



**West Texas Consultants, Inc.**  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE


LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.




MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
W COUNTY ROAD 125-3						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-25.0	

DATE: 3/22/24 10:58 AM PROJECT: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT DRAWING: W COUNTY ROAD 125-3 SHEET: C-25.0

W COUNTY ROAD 150-1.1

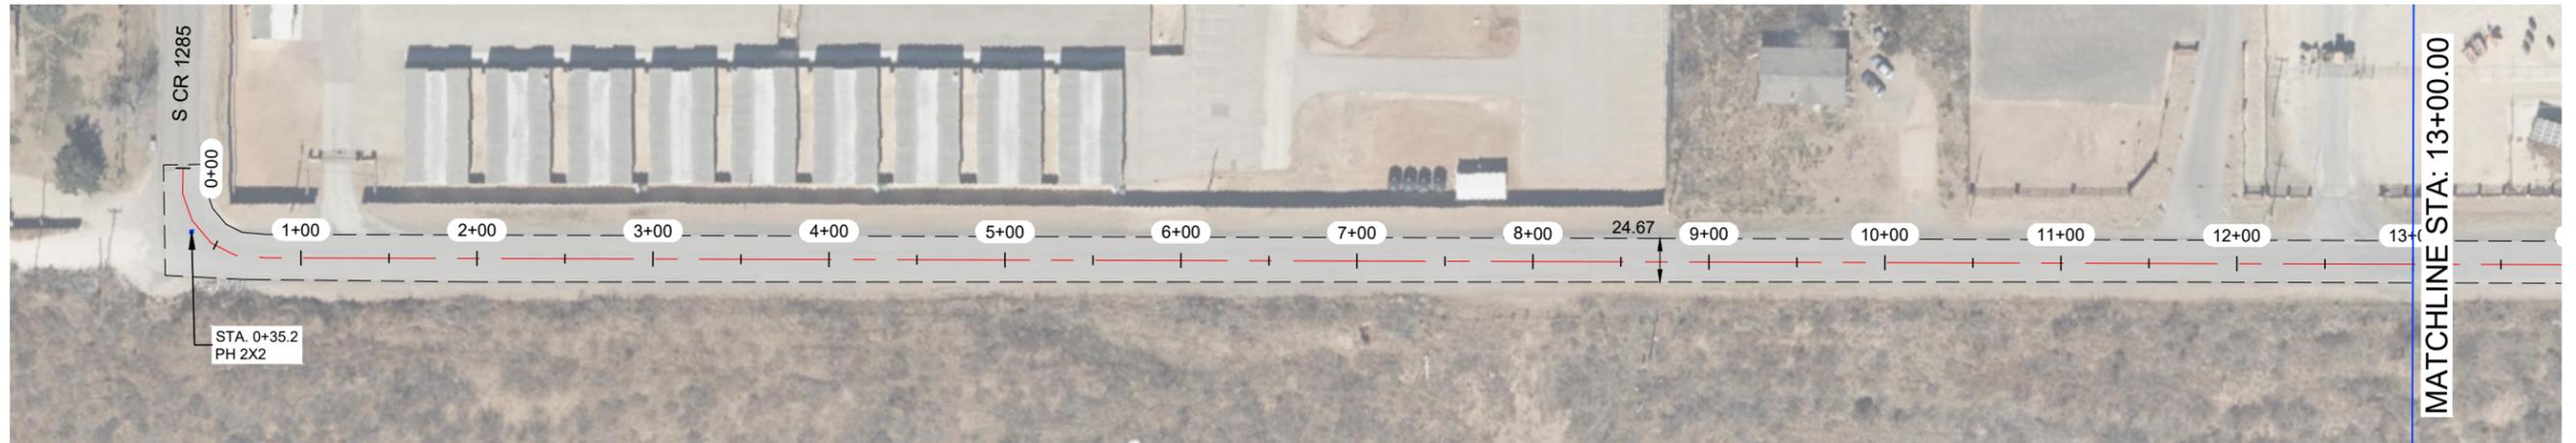

W COUNTY ROAD 150-1.1

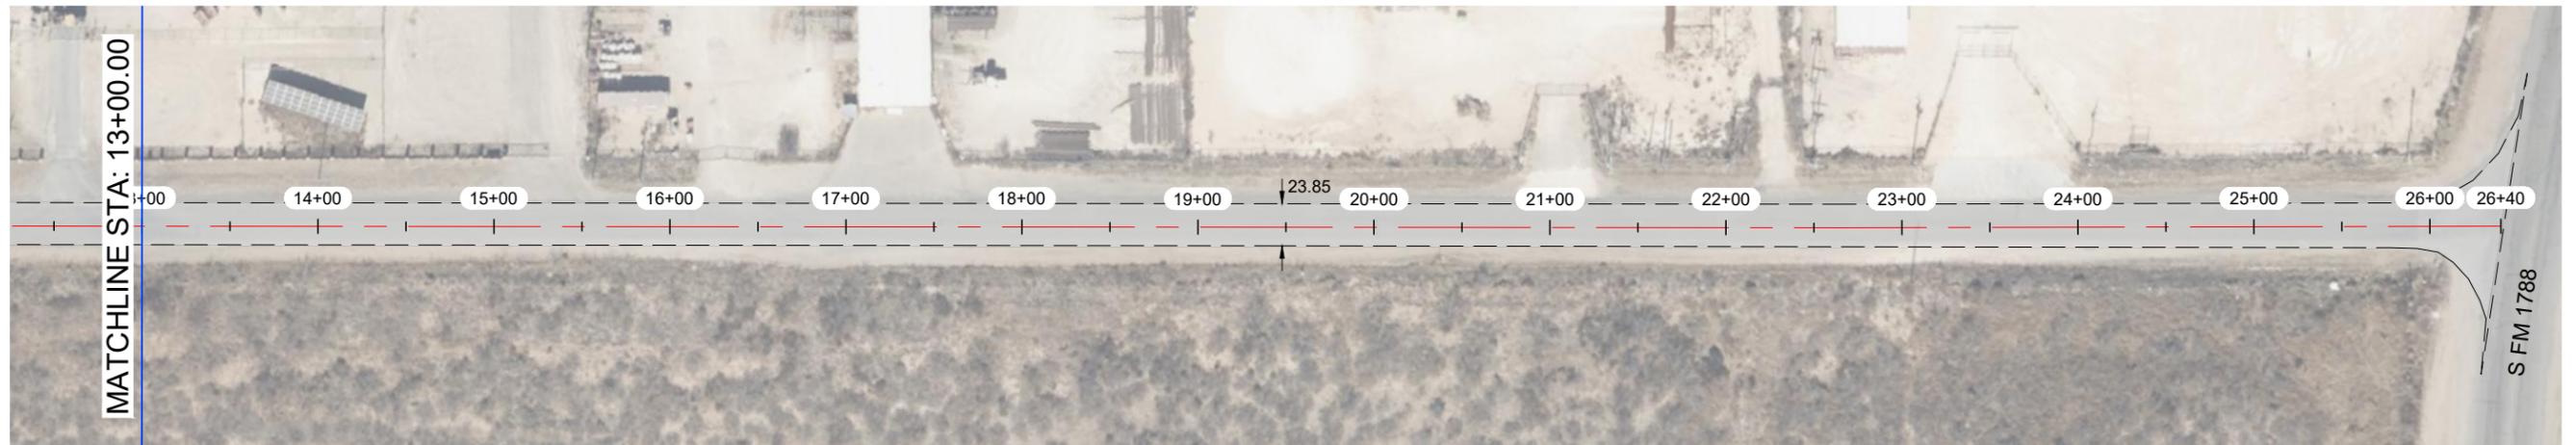


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



VICINITY MAP  
N.T.S.

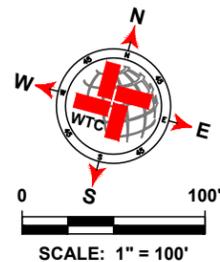

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 150-1.1 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	7 423	SY	
2	STRIPING	2 590	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.4	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545



TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
W COUNTY ROAD 150-1.1					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	C-26.0

W COUNTY ROAD 150-1.2

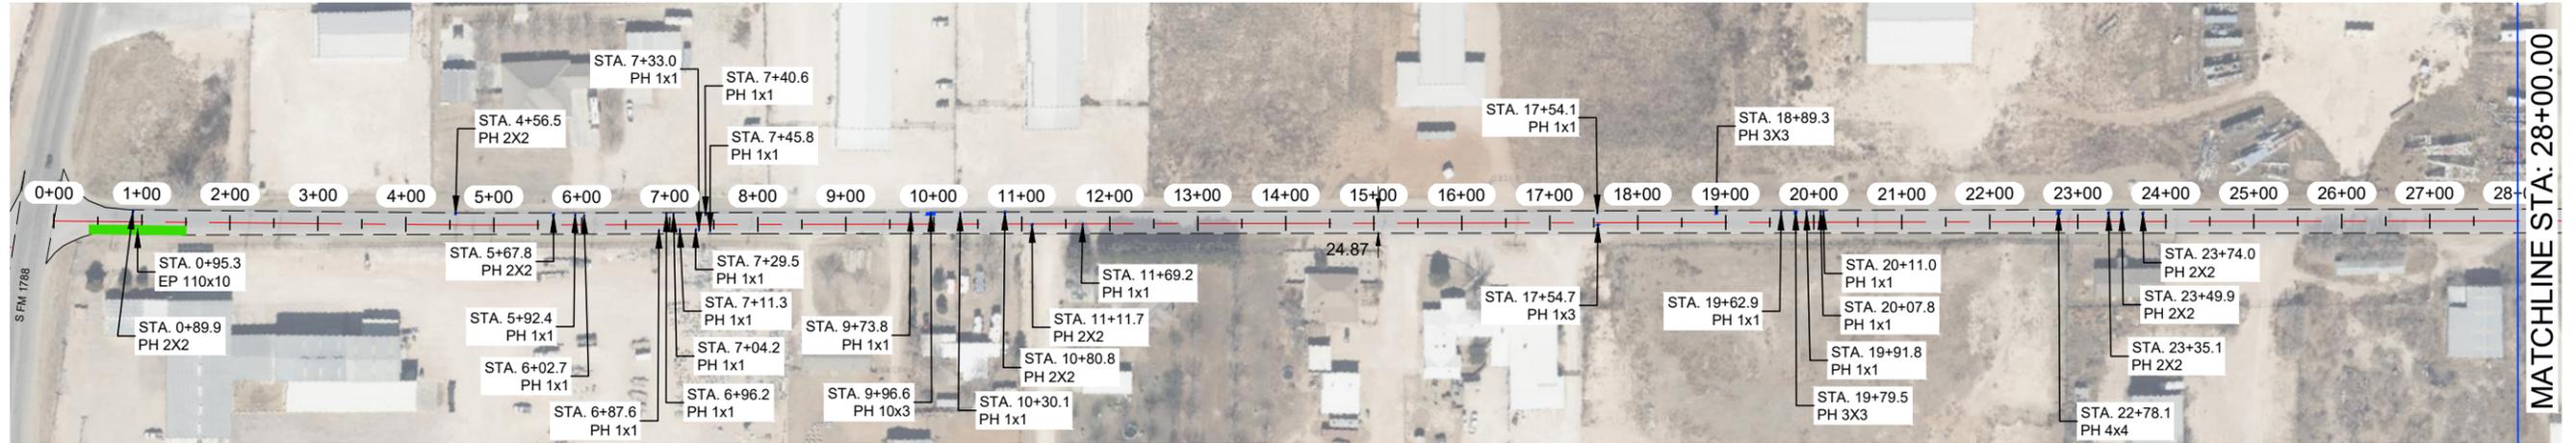


W COUNTY ROAD 150-1.2

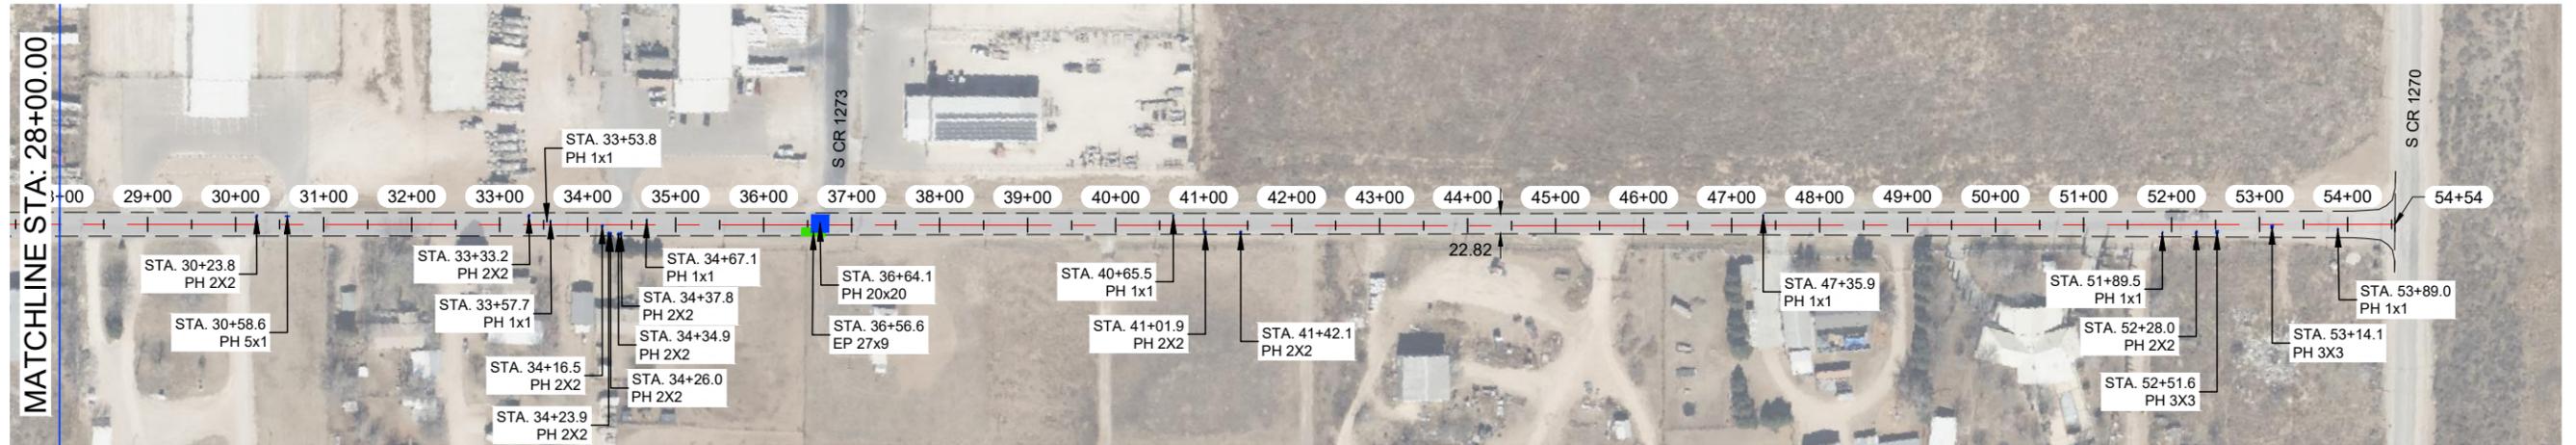


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

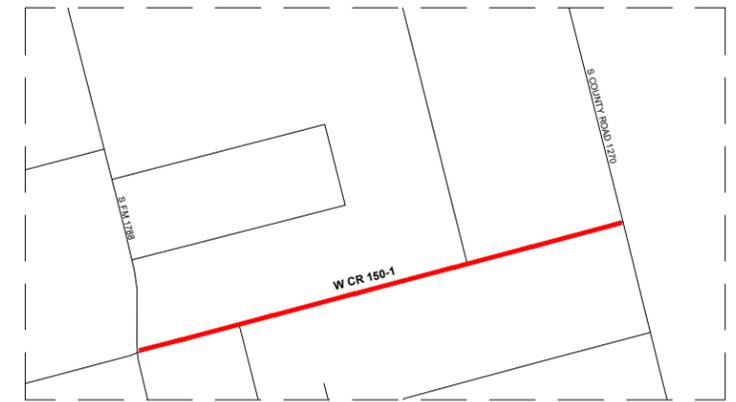

VICINITY MAP N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)


W COUNTY ROAD 150-1.2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	15 700	SY	
2	STRIPING	5 404	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	65.2	SY	
2	EDGE PATCHING (BY OTHERS)	149.2	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00


REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.





MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
W COUNTY ROAD 150-1.2					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 200'	C-27.0

**W COUNTY ROAD 100-1**

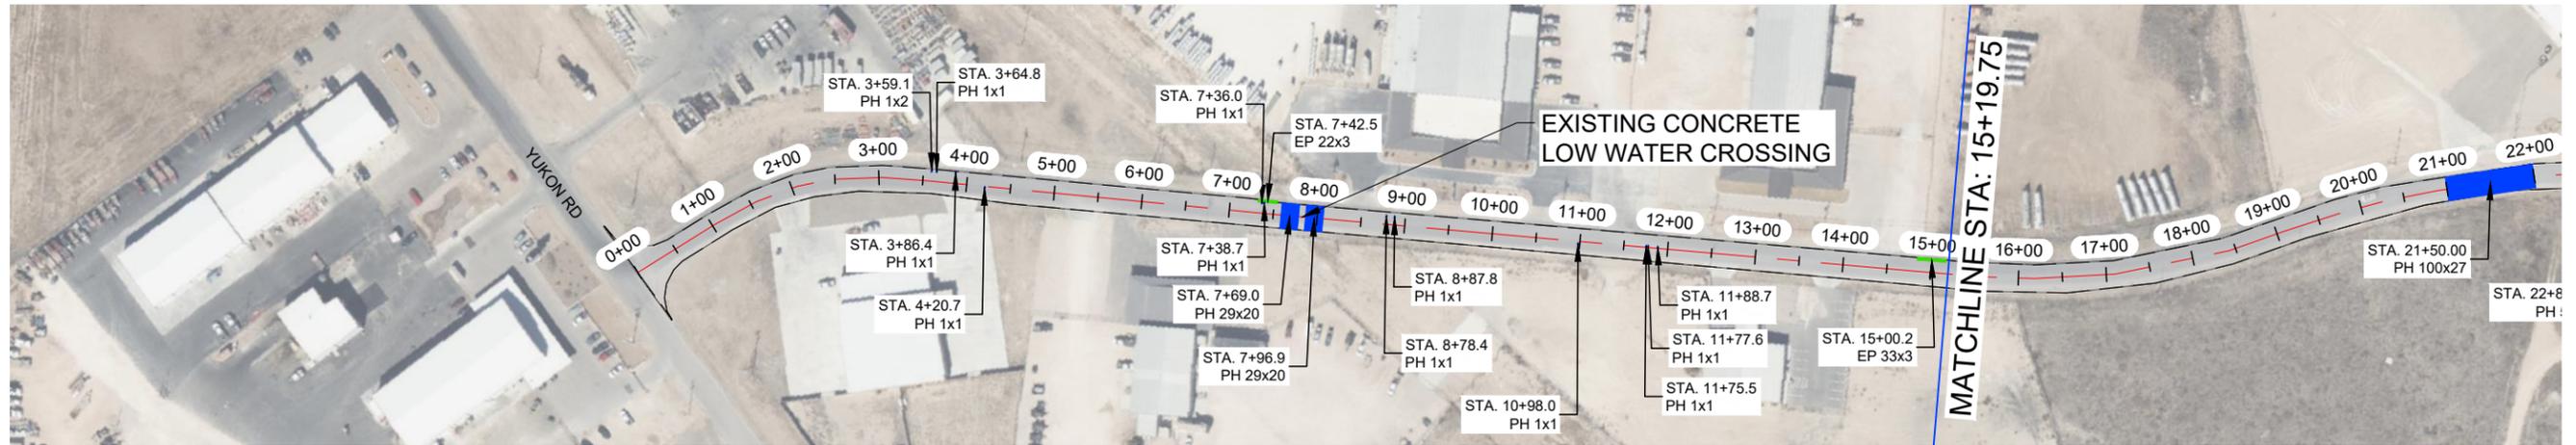

**W COUNTY ROAD 100-1**

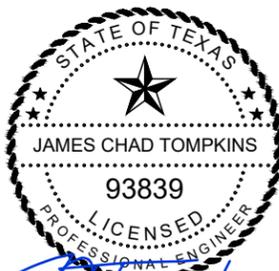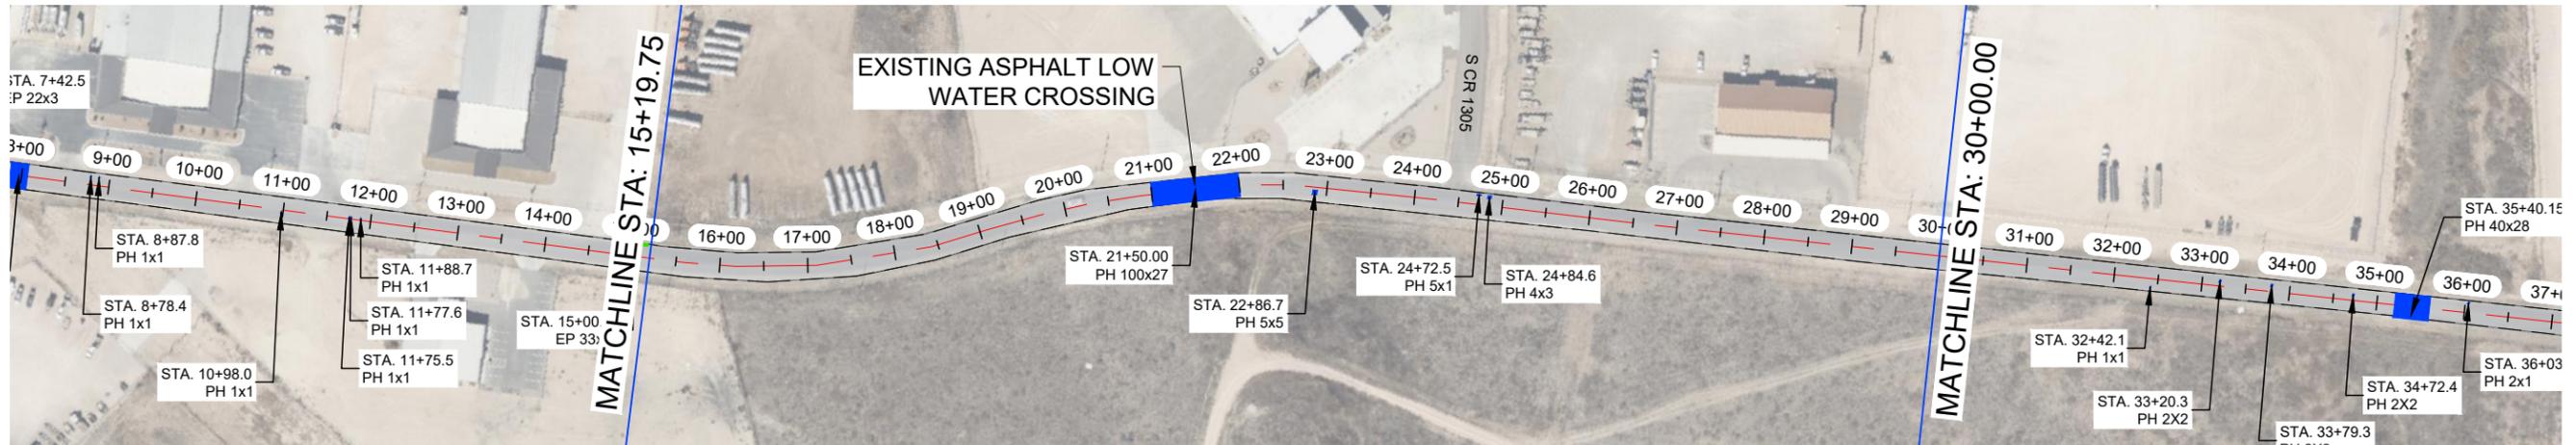


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

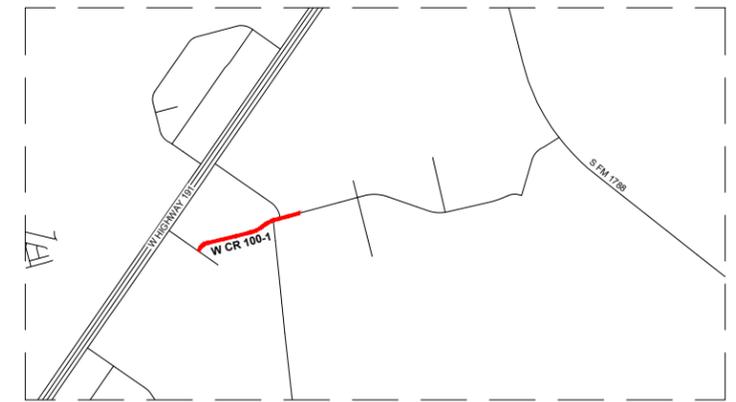

**VICINITY MAP**  
N.T.S.

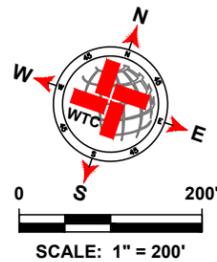

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 100-1 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	35 677	SY	
2	STRIPING	10 500	LF	
3	SOLID WHITE EDGE LINES	21 000	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	579.3	SY	
2	EDGE PATCHING (BY OTHERS)	135.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
W COUNTY ROAD 100-1					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 200'	C-28.0

DATE: 3/22/24 10:58 AM PROJECT: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\24\W COUNTY ROAD 100-1\20240322\115.MXD

W COUNTY ROAD 100-1

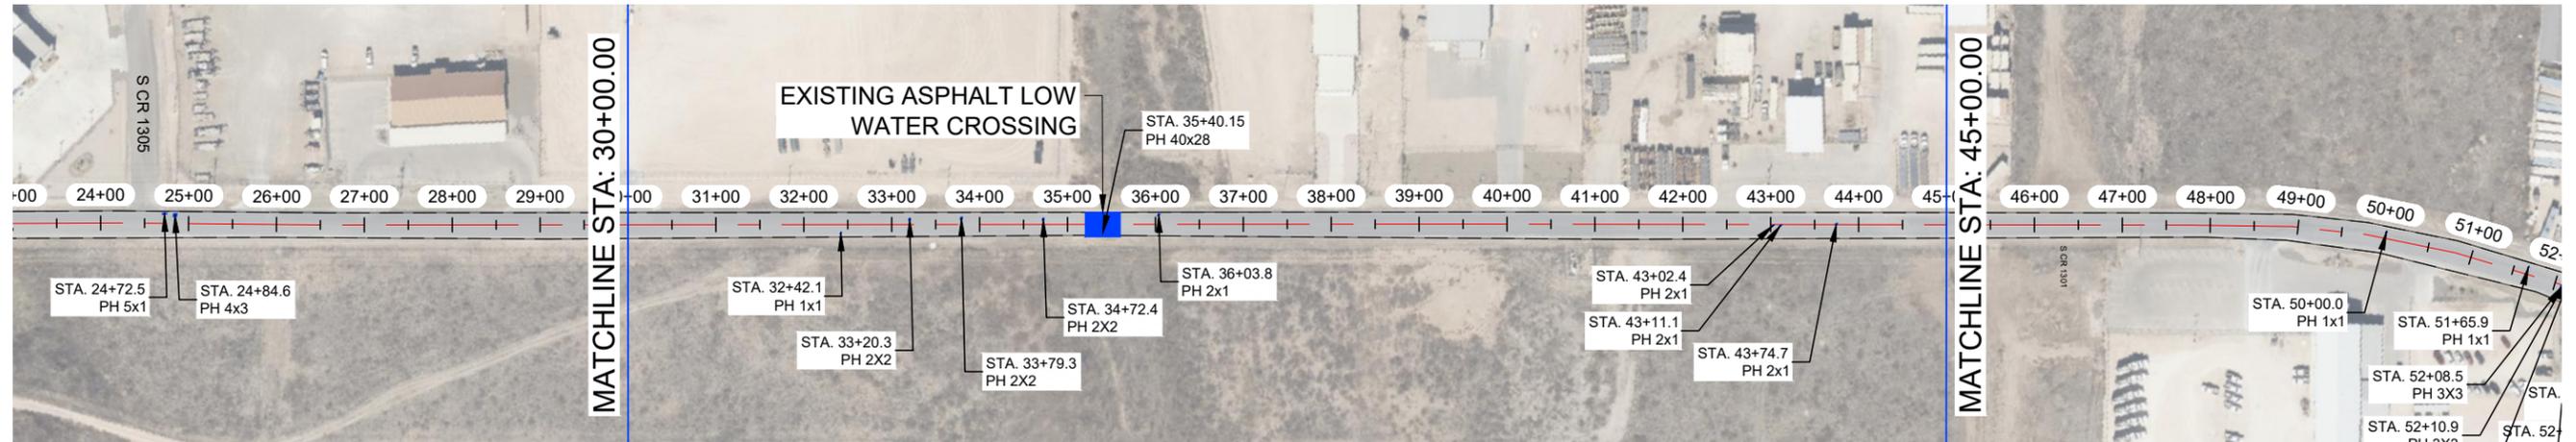

W COUNTY ROAD 100-1

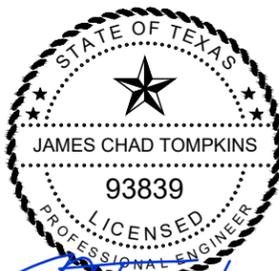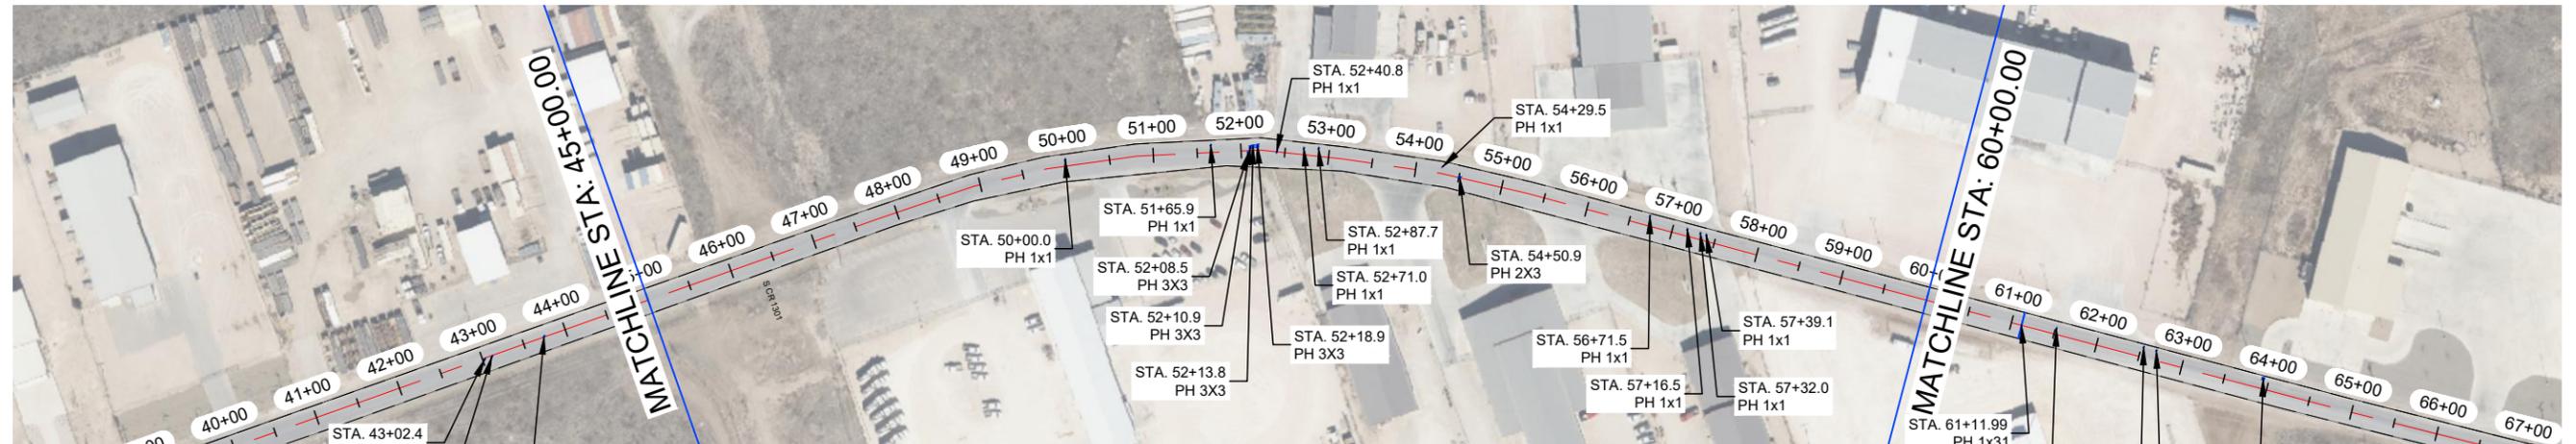


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

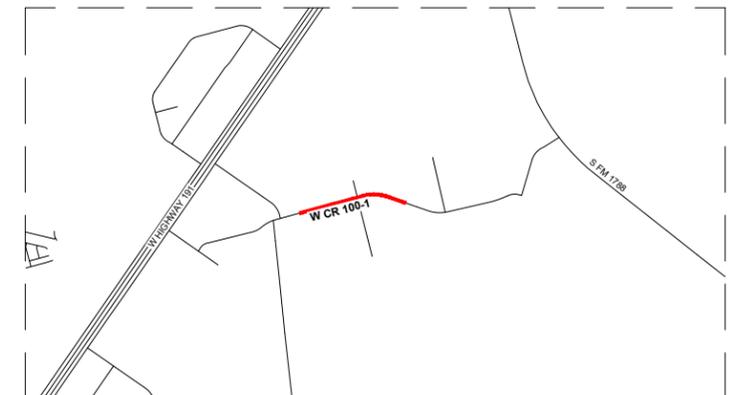

VICINITY MAP  
N.T.S.

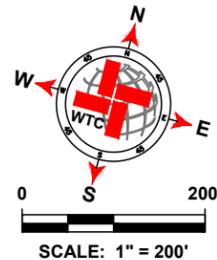

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 100-1 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)		SY	
2	STRIPING		LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)		SY	
2	EDGE PATCHING (BY OTHERS)		SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
W COUNTY ROAD 100-1						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 200'	C-28.1	

DATE: 3/22/24 10:58 AM PROJECT: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\A\1\W COUNTY ROAD 100-1\20240322\1058 AM.DWG

W COUNTY ROAD 100-1

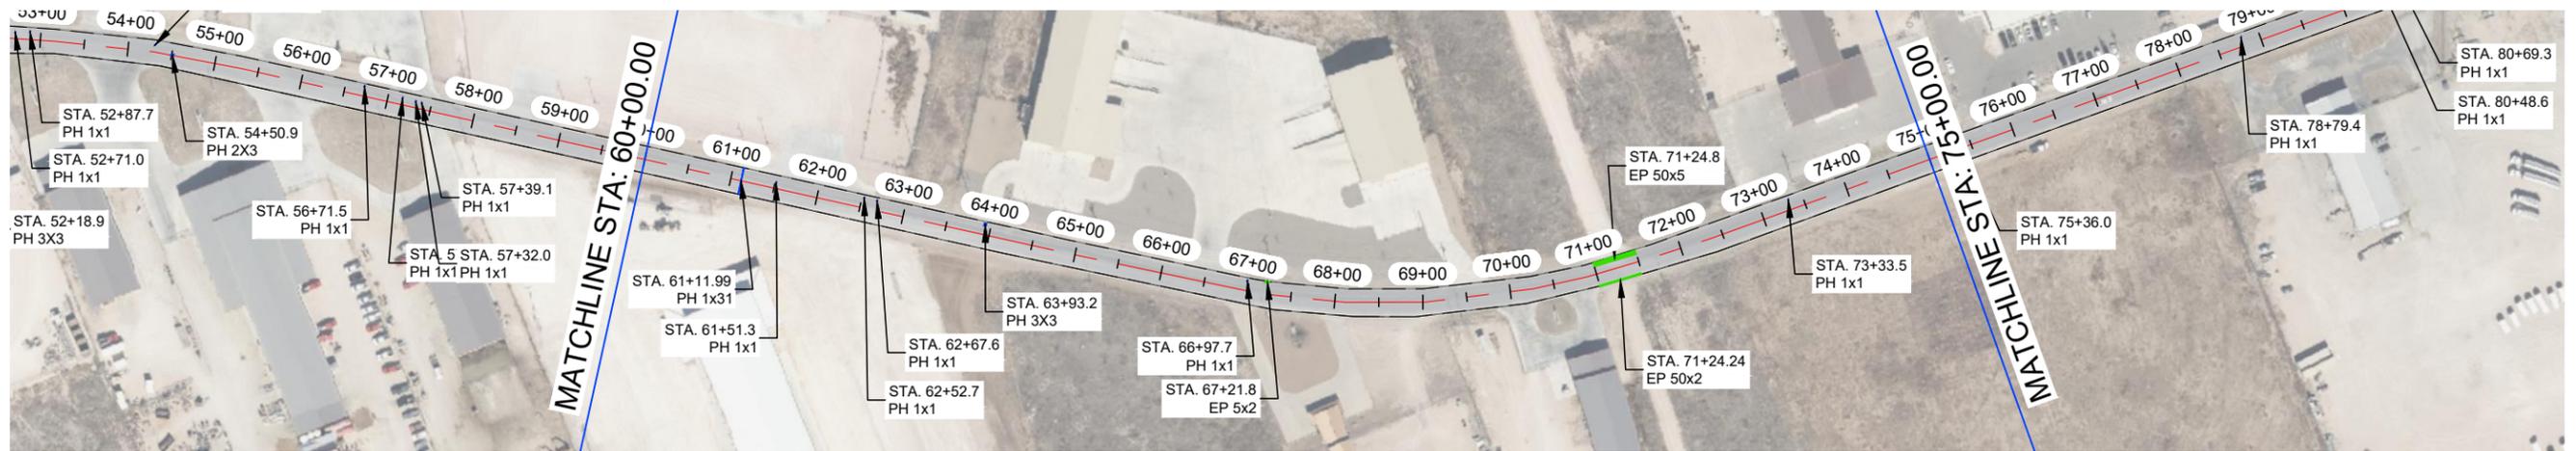


W COUNTY ROAD 100-1

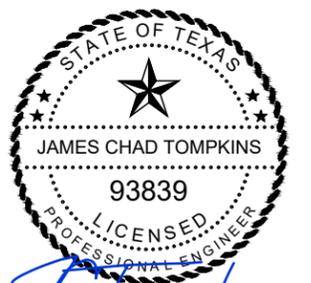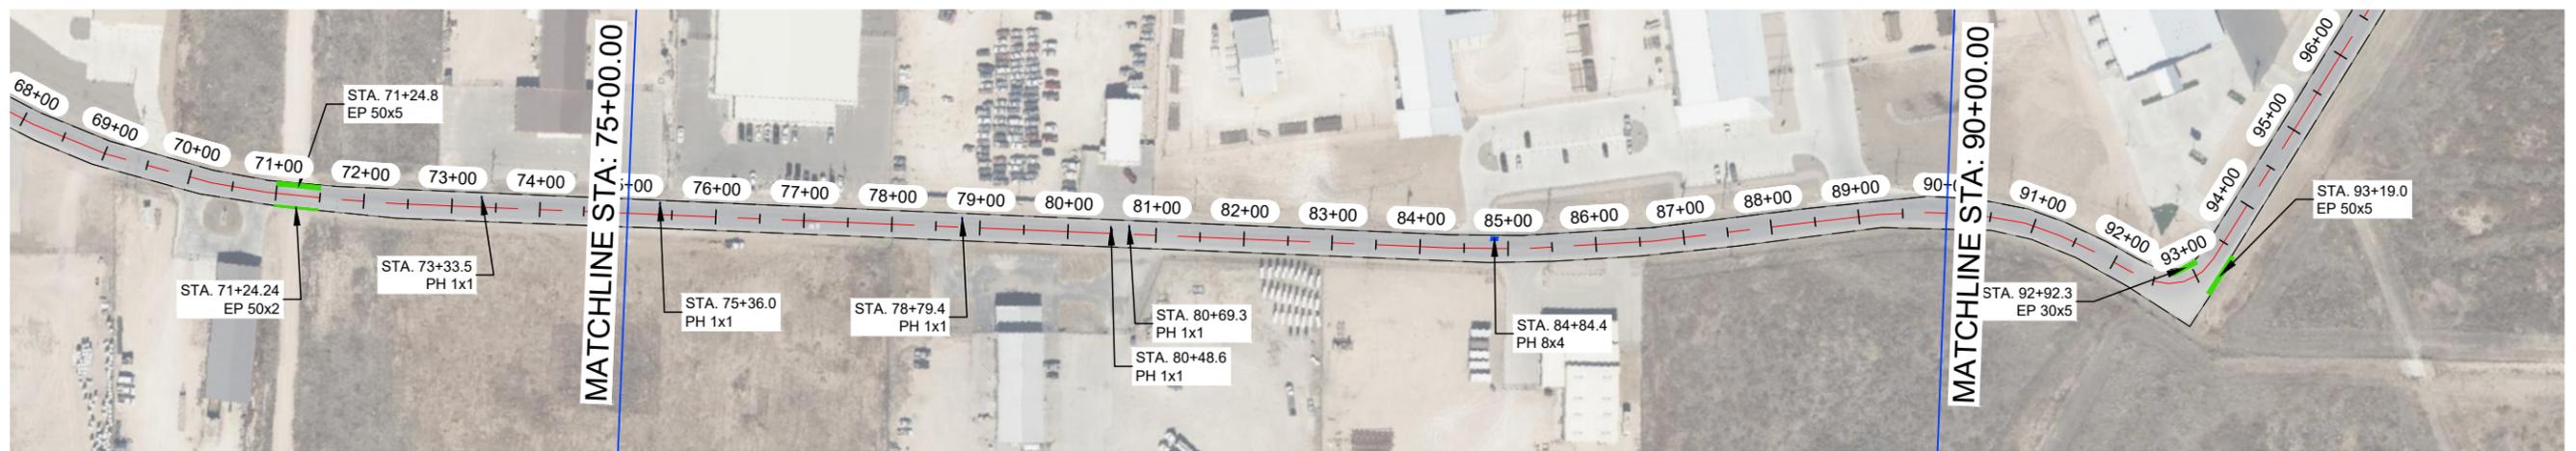


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

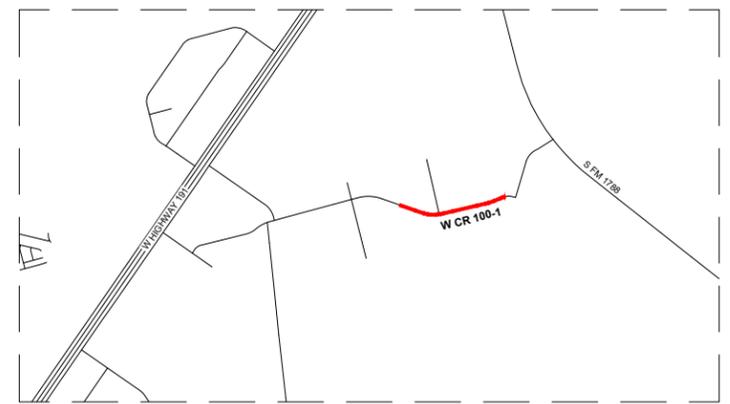

VICINITY MAP  
N.T.S.

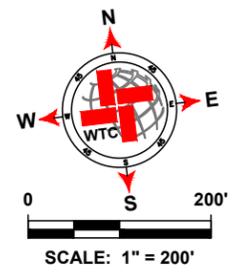

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 100-1 QUANTITIES			
ITEM #	ITEM	QTY.	UNIT
1	TWO-COURSE SEAL COAT (APPROX.)		SY
2	STRIPING		LF
3	SOLID WHITE EDGE LINES		LF
WORK BY OTHERS			
ITEM #	ITEM	QTY.	UNIT
1	POTHOLE REPAIR (BY OTHERS)		SY
2	EDGE PATCHING (BY OTHERS)		SY

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS



2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

W COUNTY ROAD 100-1

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 200'	C-28.2

DATE: 3/22/24 10:58 AM PROJECT: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\24\W COUNTY ROAD 100-1\20240322\115.MXD

W COUNTY ROAD 100-1

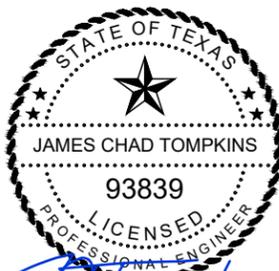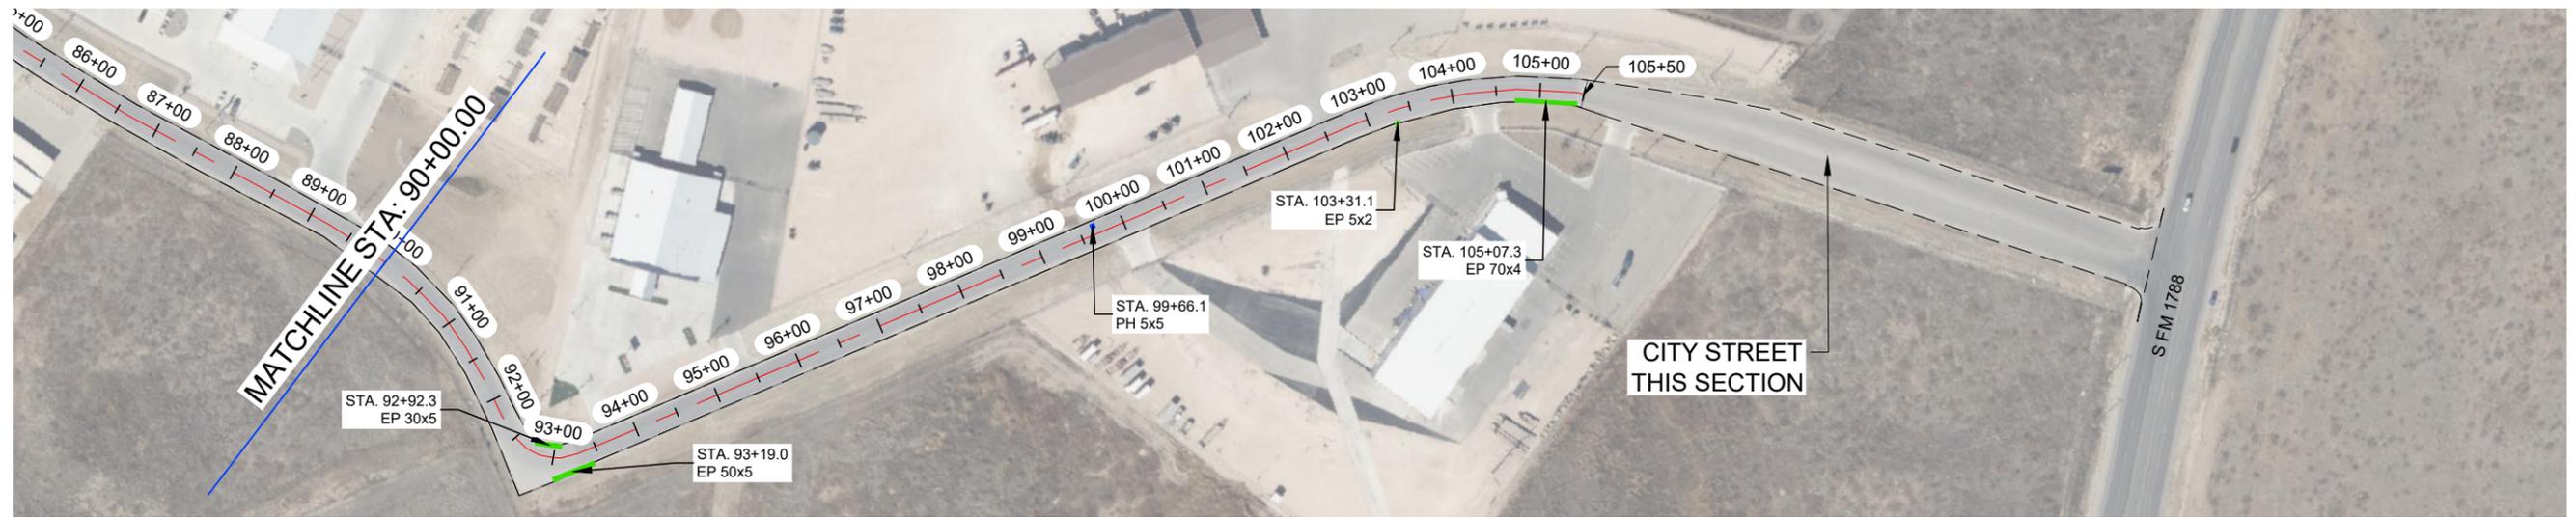


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

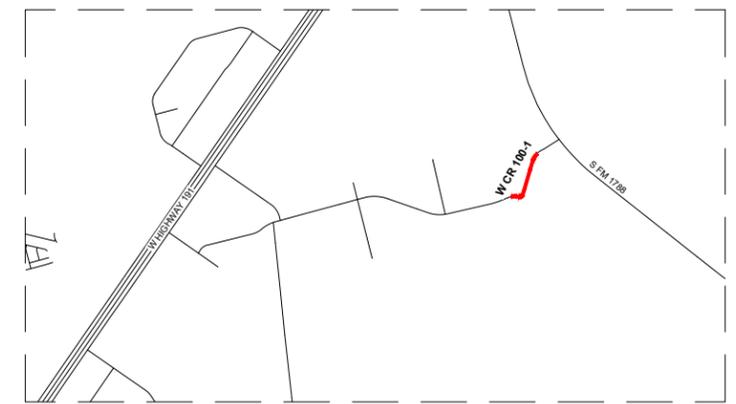

VICINITY MAP  
N.T.S.



SCALE: 1" = 200'

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 100-1 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)		SY	
2	STRIPING		LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)		SY	
2	EDGE PATCHING (BY OTHERS)		SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.




Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545  
TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM





MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
W COUNTY ROAD 100-1						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 200'	C-28.3	

DATE: 3/22/24 10:58 AM PROJECT: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT SHEET: C-28.3

**S COUNTY ROAD 1276**

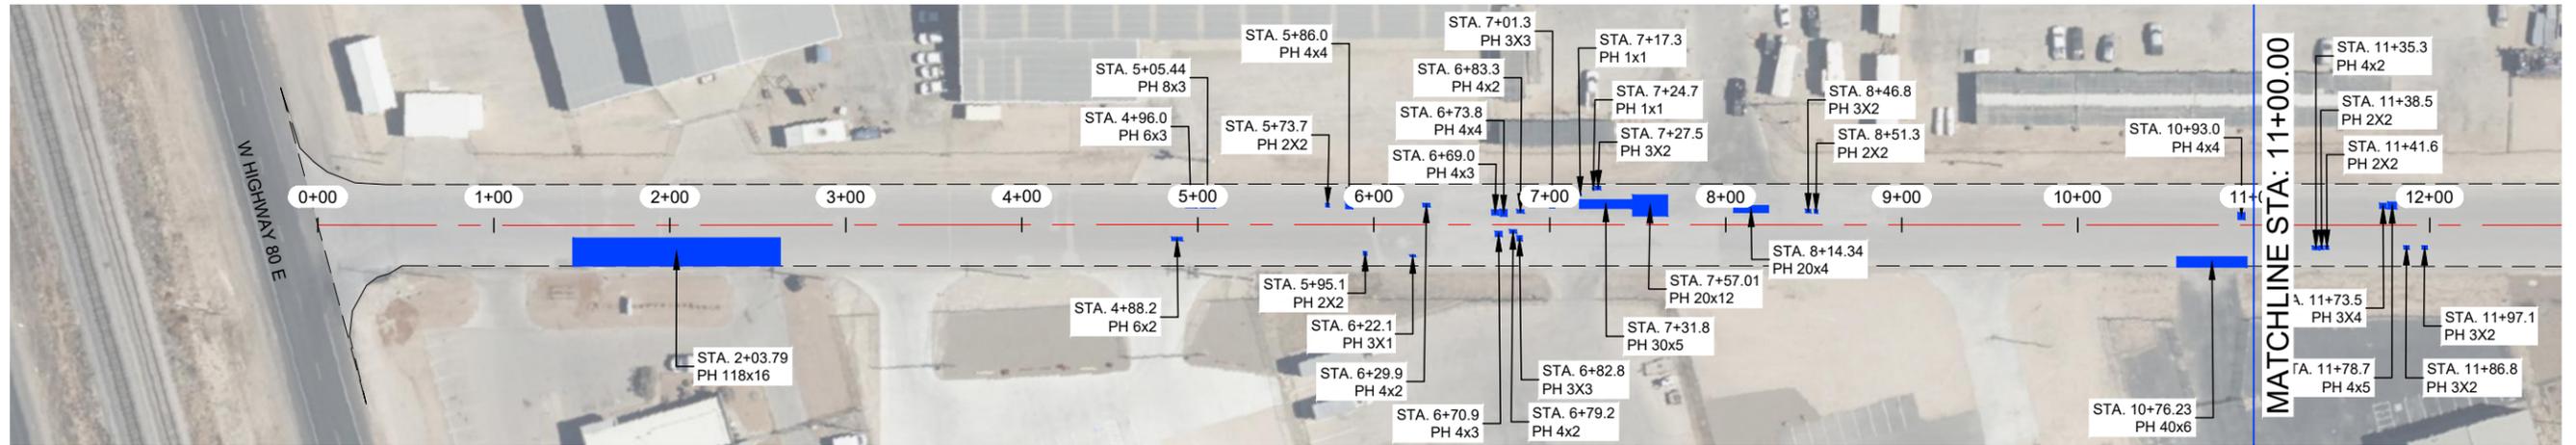

**S COUNTY ROAD 1276**


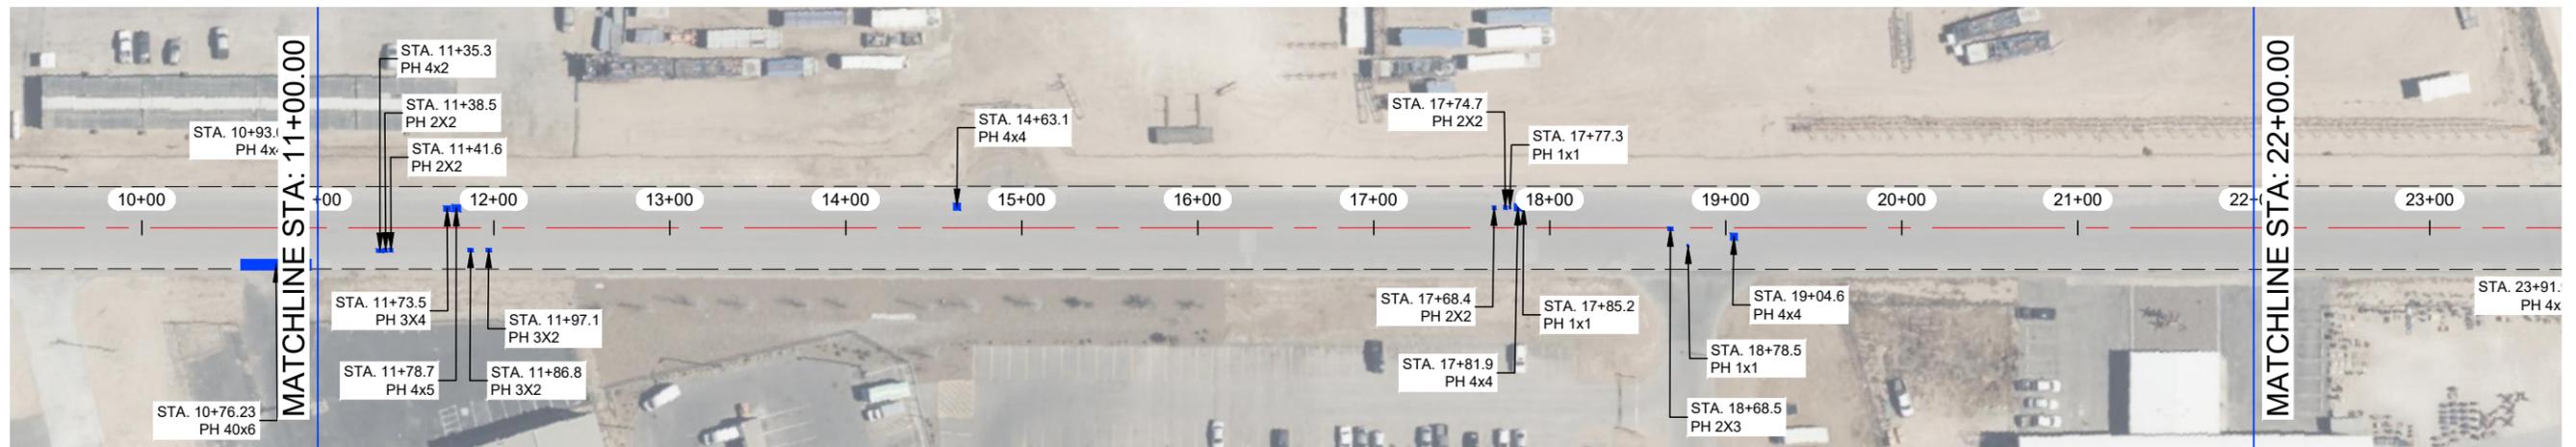


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

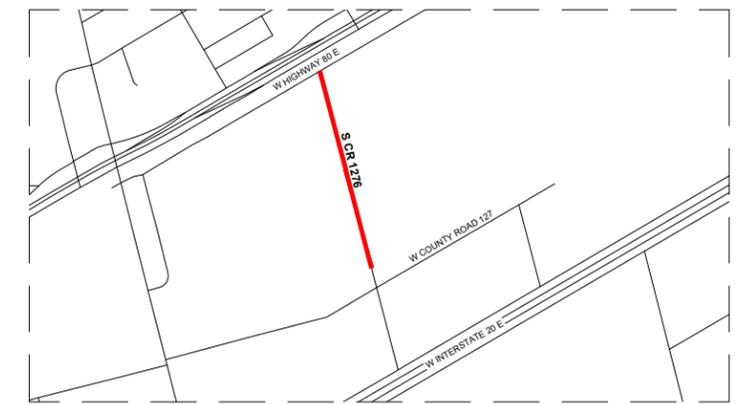

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1276 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	17 556	SY	
2	STRIPING	3 272	LF	
3	SOLID WHITE EDGE LINES	6 544	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	371.9	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
S COUNTY ROAD 1276					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	C-29.0



# S COUNTY ROAD 1273

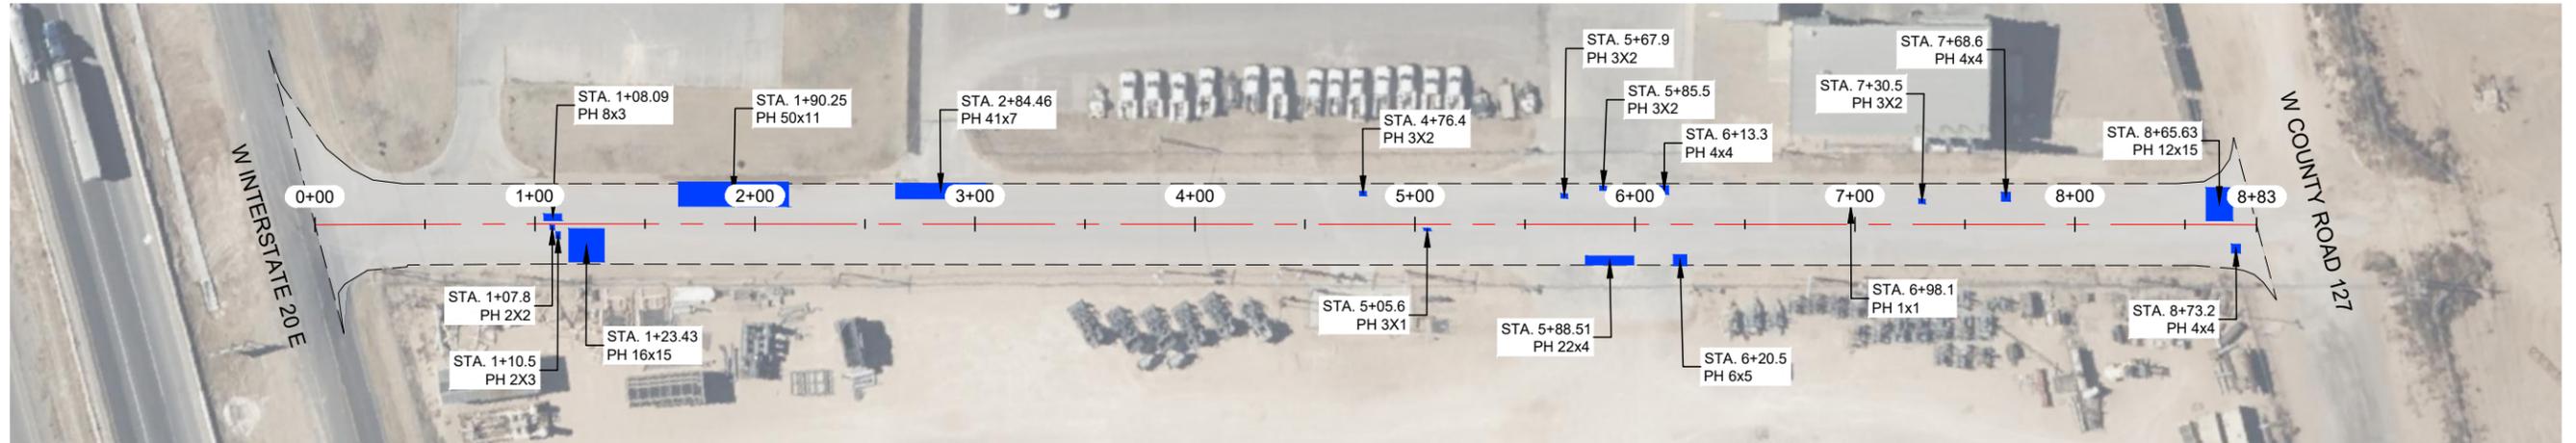

*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1273 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	3 731	SY	
2	STRIPING	833	LF	
3	SOLID WHITE EDGE LINES	1 666	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	165.0	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM


MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
S COUNTY ROAD 1273					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 80'	C-30.0

DRAWING NO. 2024-0001-01 - DESIGN - 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT T.M. C-30.0 S. COUNTY ROAD 1273 3/22/2024 1.8 PAIR/ROMERO

**S COUNTY ROAD 1260**



**S COUNTY ROAD 1260**


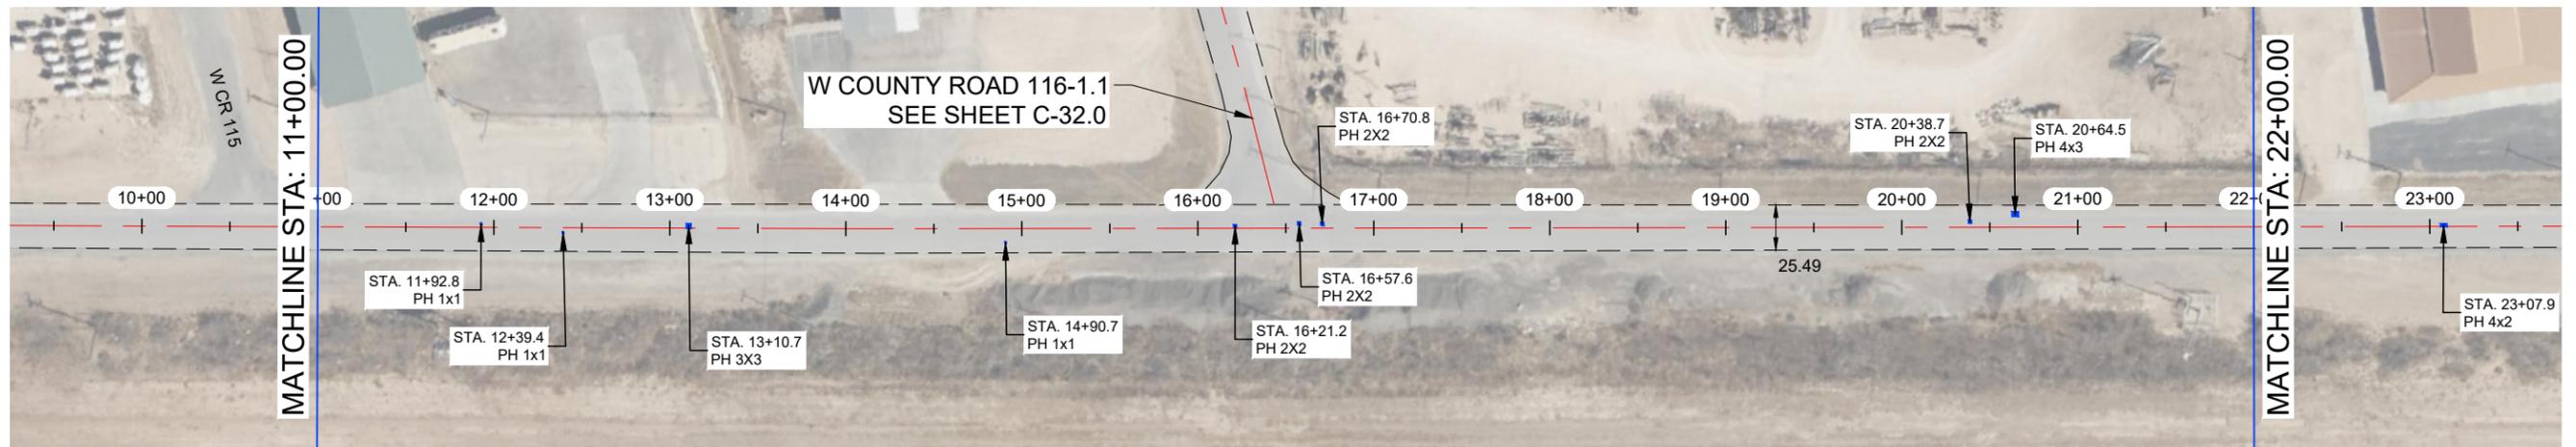


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

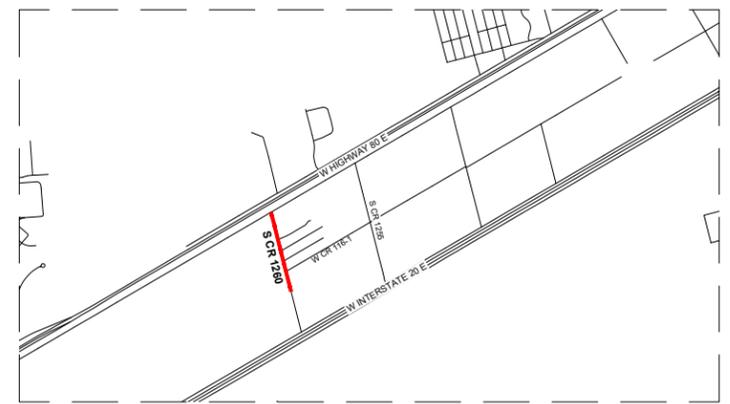

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1260 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	9 624	SY	
2	STRIPING	3 291	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	5.4	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1260						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	C-31.0	



DATE: 3/22/24 10:58 AM DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT TBL\_C-31.0 S COUNTY ROAD 1260 3/22/2024 10:58 AM R1000000



W COUNTY ROAD 116-1.1



W COUNTY ROAD 116-1.1

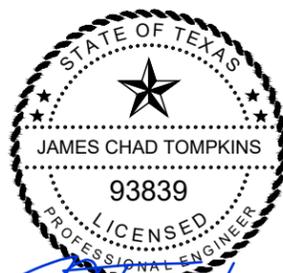
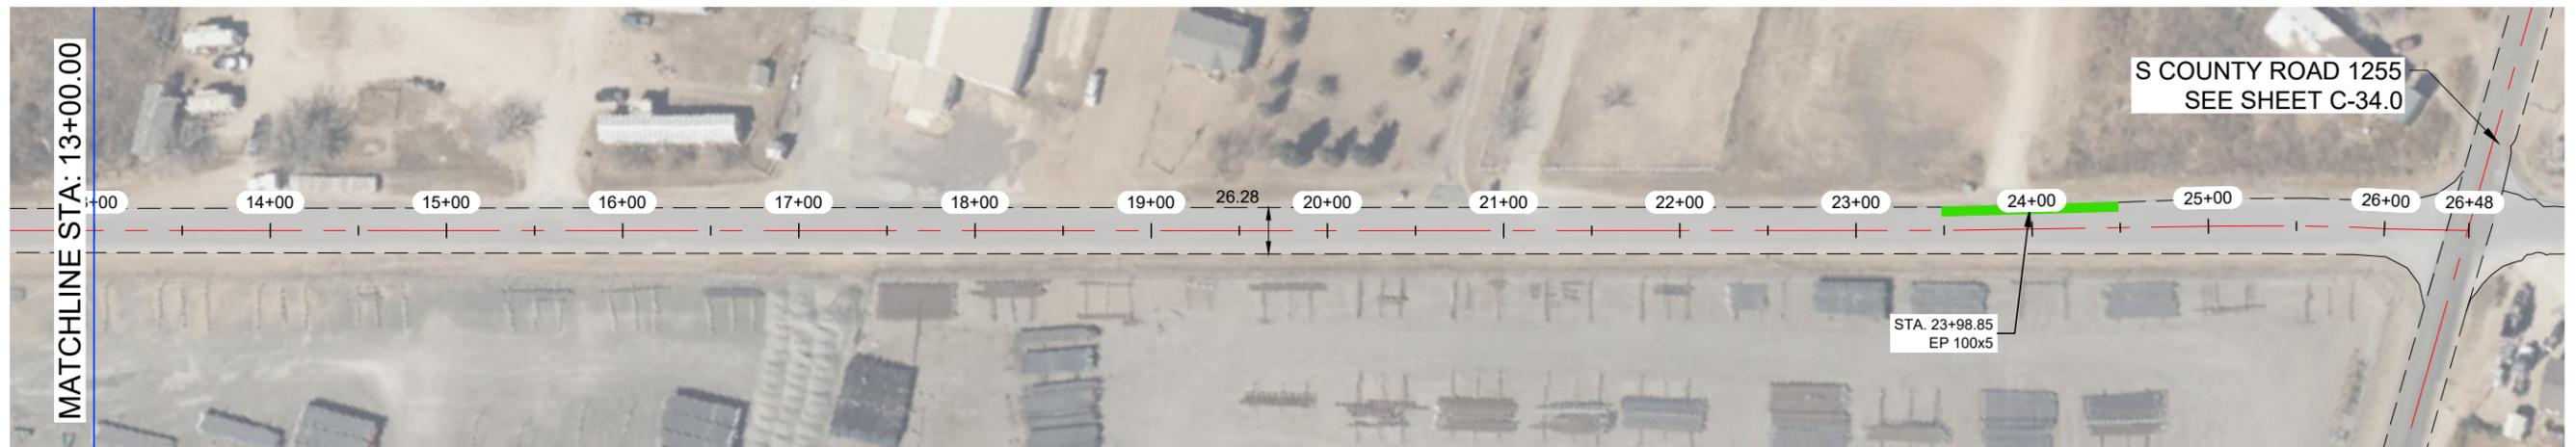


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

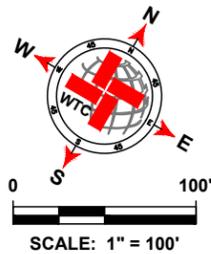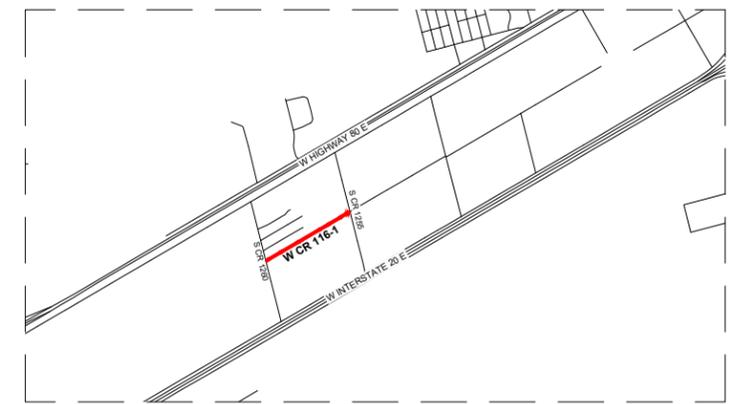

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 116-1.1 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	7 778	SY	
2	STRIPING	2 598	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	9.6	SY	
2	EDGE PATCHING (BY OTHERS)	55.6	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM


MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
W COUNTY ROAD 116-1.1					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	C-32.0

DATE: X:\PROJECTS\ENGINEERING & SURVEY\TEXAS\MIDLAND COUNTY PAVING\2024-1-DESIGN\65276 - DRAWINGS\DWG\65276-2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT TME\_C-32.0 W COUNTY ROAD 116-1.1-20240323 10 PM.RDW

W COUNTY ROAD 116-1.2

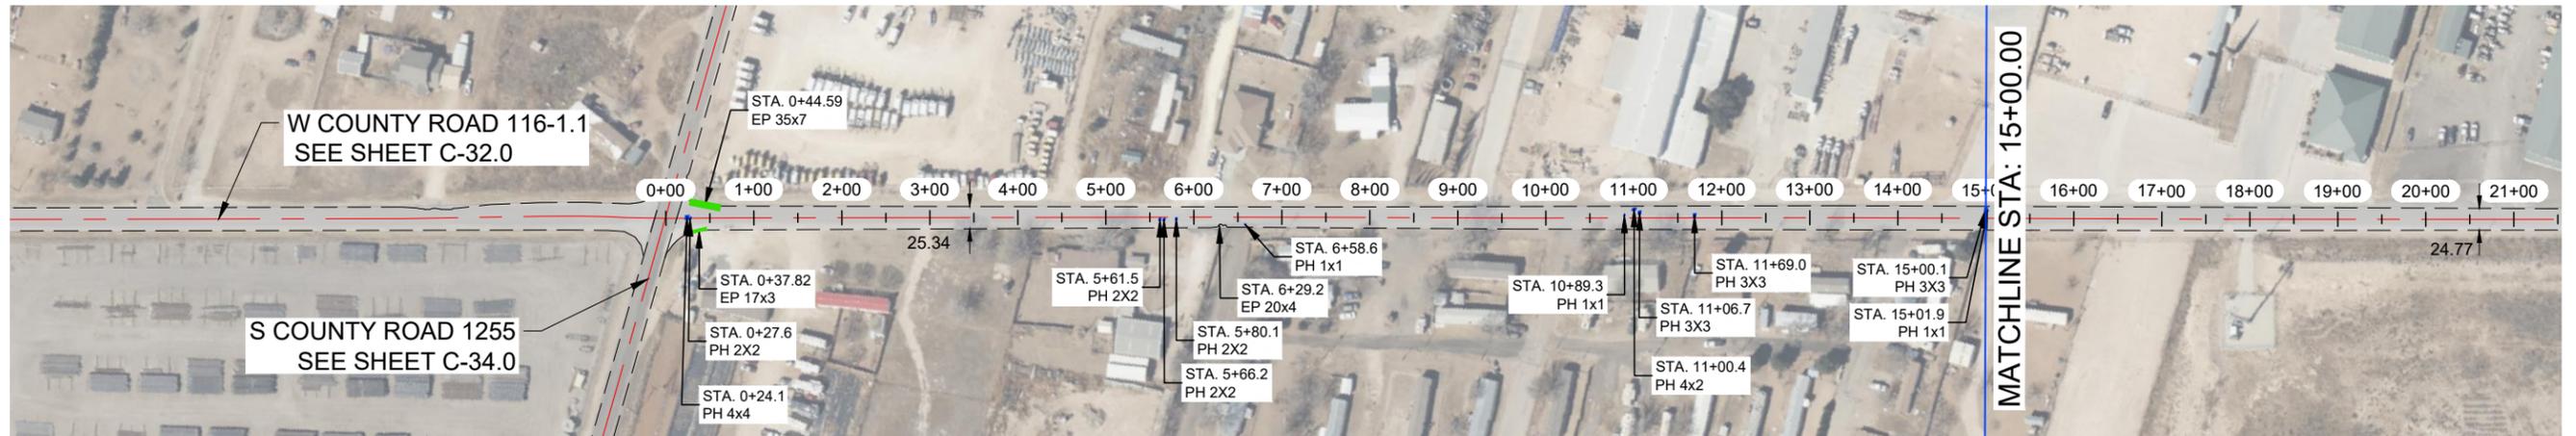

W COUNTY ROAD 116-1.2


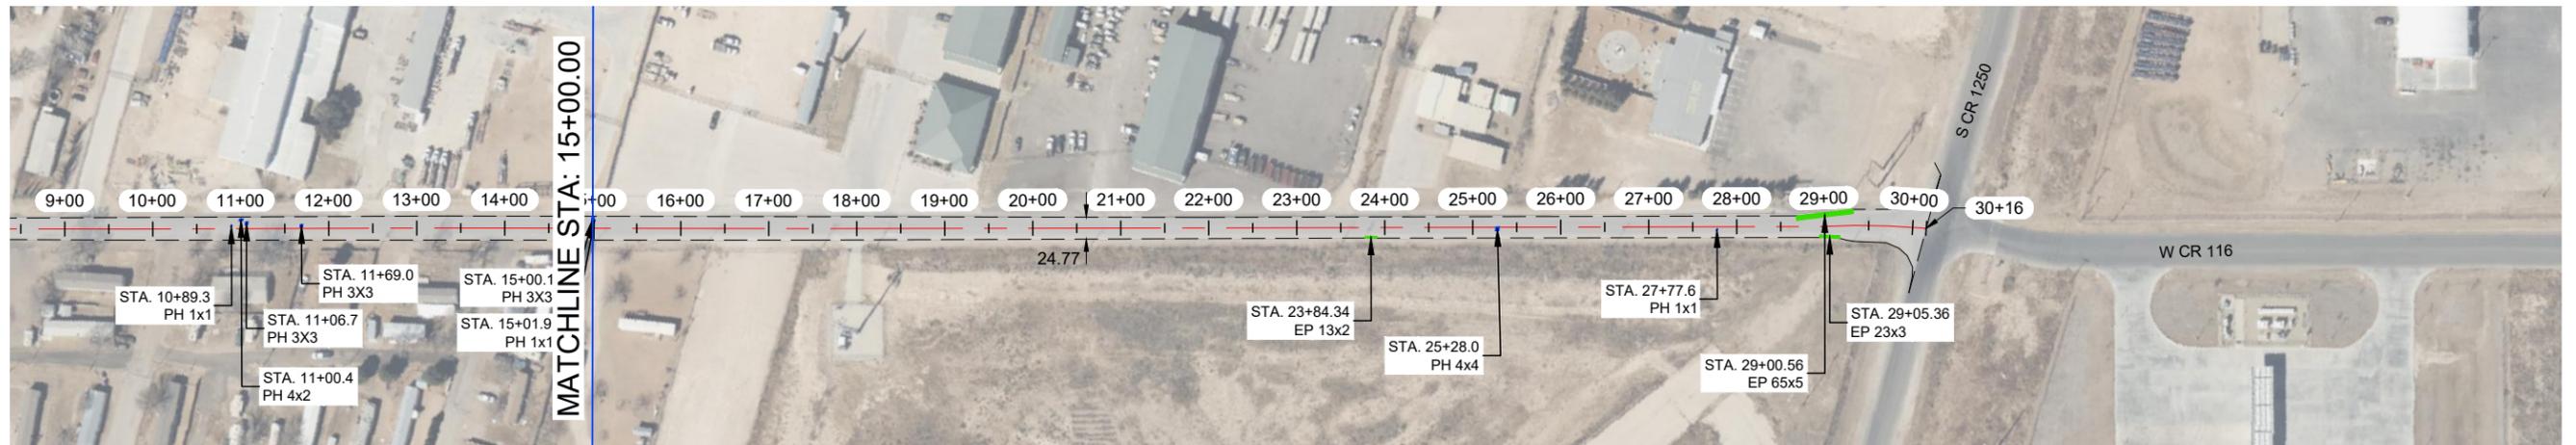


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

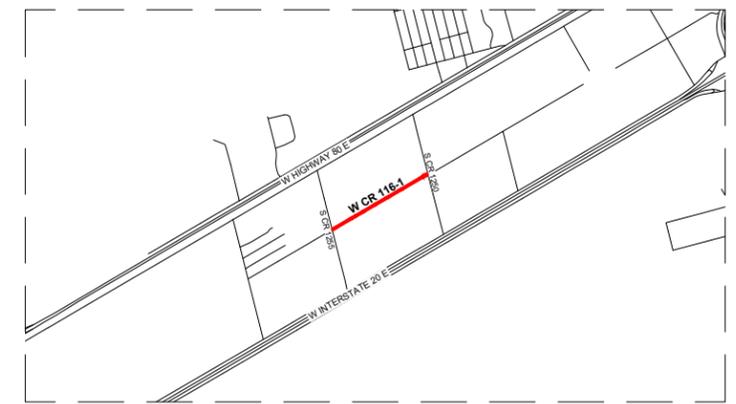

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W COUNTY ROAD 116-1.2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	8 786	SY	
2	STRIPING	2 966	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	9.7	SY	
2	EDGE PATCHING (BY OTHERS)	88.4	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM


MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
W COUNTY ROAD 116-1.2					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 200'	C-33.0

DRAWN: J.C.T. ENGINEERING & SURVEYING, INC. 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\313\W COUNTY ROAD 116-1.2\2024\3.16.PW.BOWEN

**S COUNTY ROAD 1255**

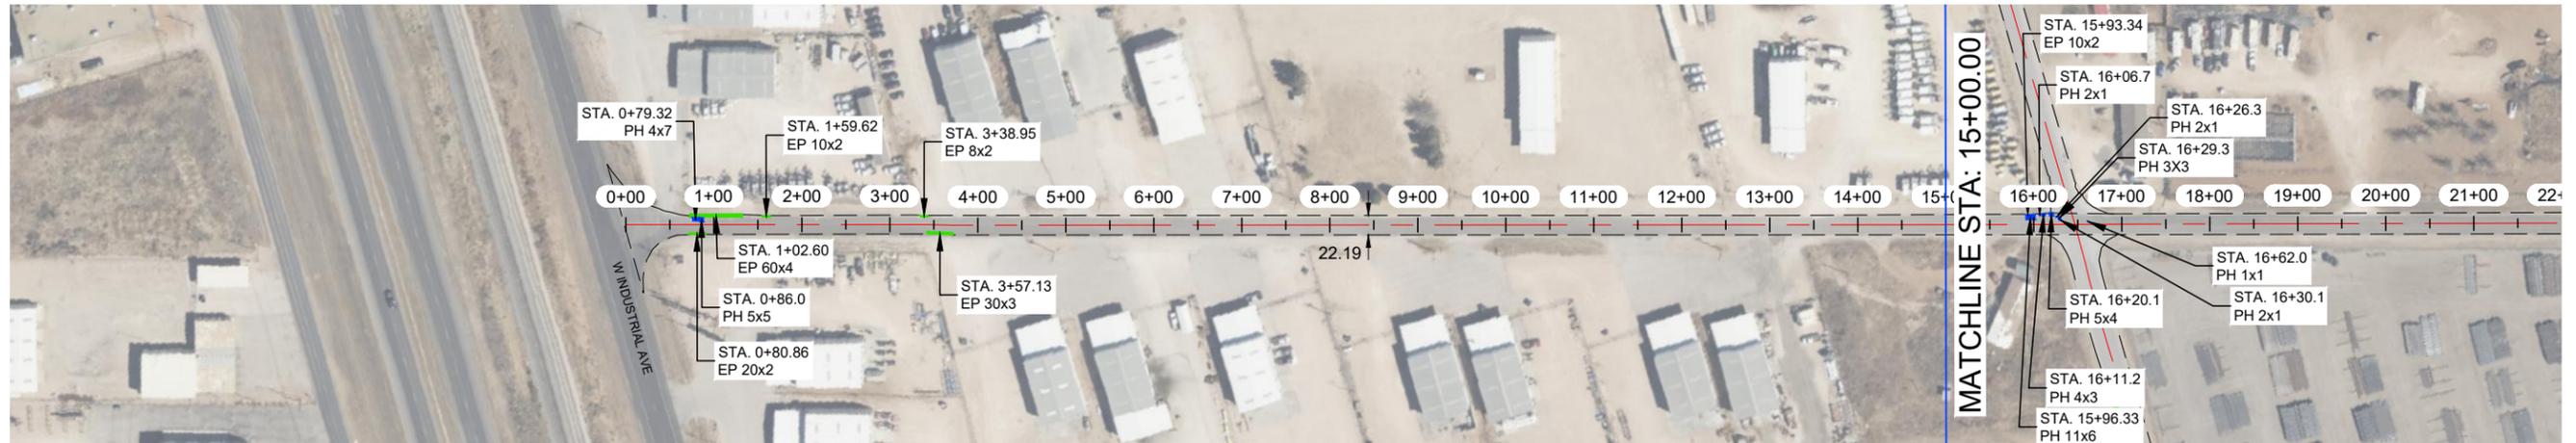


**S COUNTY ROAD 1255**

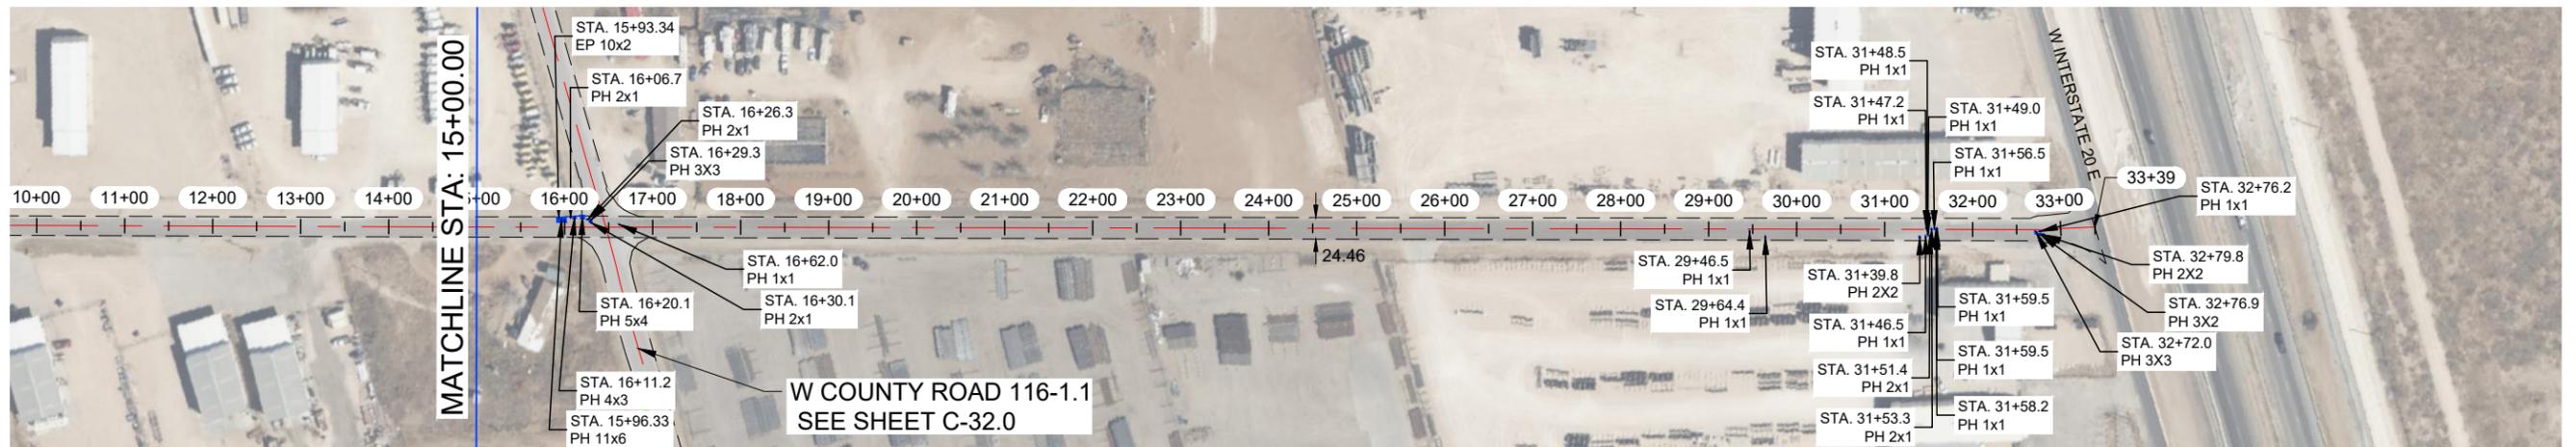


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

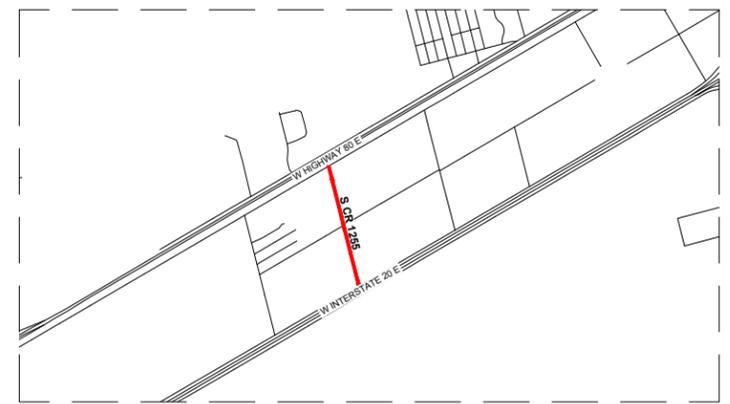

**VICINITY MAP**  
N.T.S.

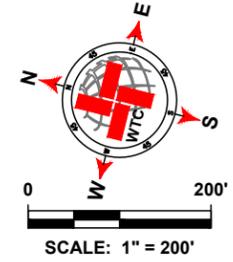

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1255 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	9 140	SY	
2	STRIPING	3 289	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	22.8	SY	
2	EDGE PATCHING (BY OTHERS)	47.3	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

**MIDLAND COUNTY, TEXAS**

2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

**S COUNTY ROAD 1255**

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 200'	C-34.0


DATE: 3/22/24 10:58 AM DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\A\15 COUNTY ROAD 1255\2024\18 PAVEMENT



**TRADE DR**



**TRADE DR**

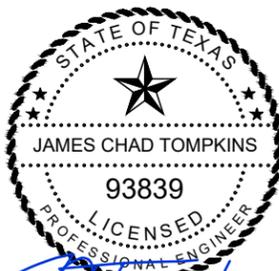


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

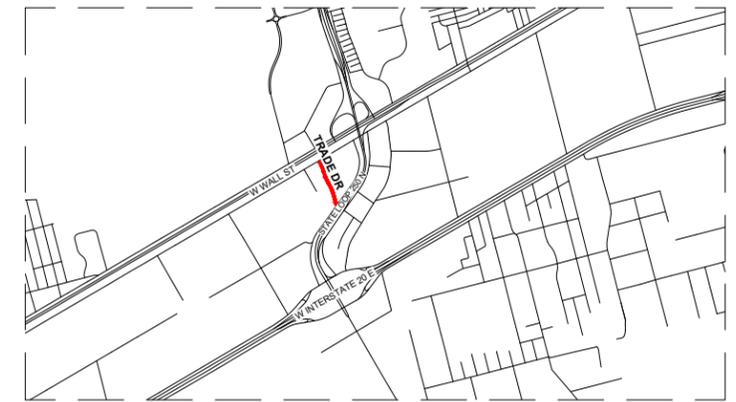

**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

TRADE DR QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	4 216	SY	
2	STRIPING	1 215	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	27.4	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	



**West Texas Consultants, Inc.**  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE


LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
TRADE DR						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 50'	C-36.0	

DATE: 3/22/24 10:58 AM DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\01\TRADE DR\2024\117.PLT (REVISED)

STATE ST

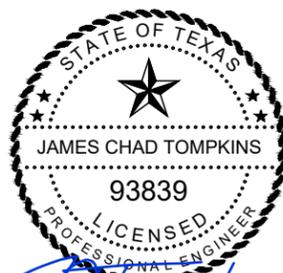


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

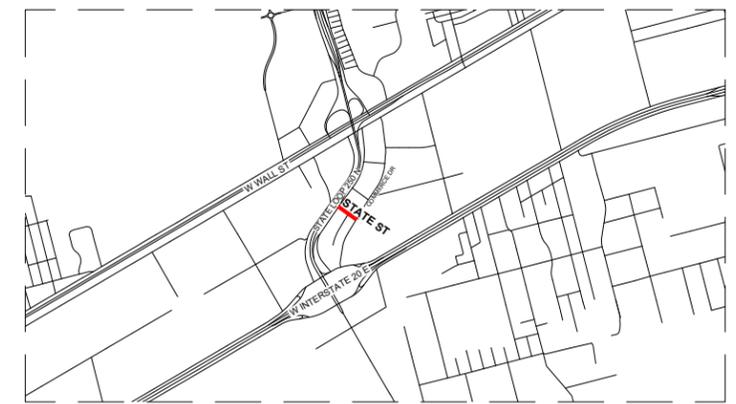

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

STATE ST QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	2 446	SY	
2	STRIPING	506	LF	
3	SOLID WHITE EDGE LINES	1 012	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	11.2	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM


MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
STATE ST					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 50'	C-37.0

DATE: 3/22/24 10:58 AM DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT TME\_C-37.0 STATE ST 3/22/2024 3:17 PM ROMERO

**COMMERCE DR**

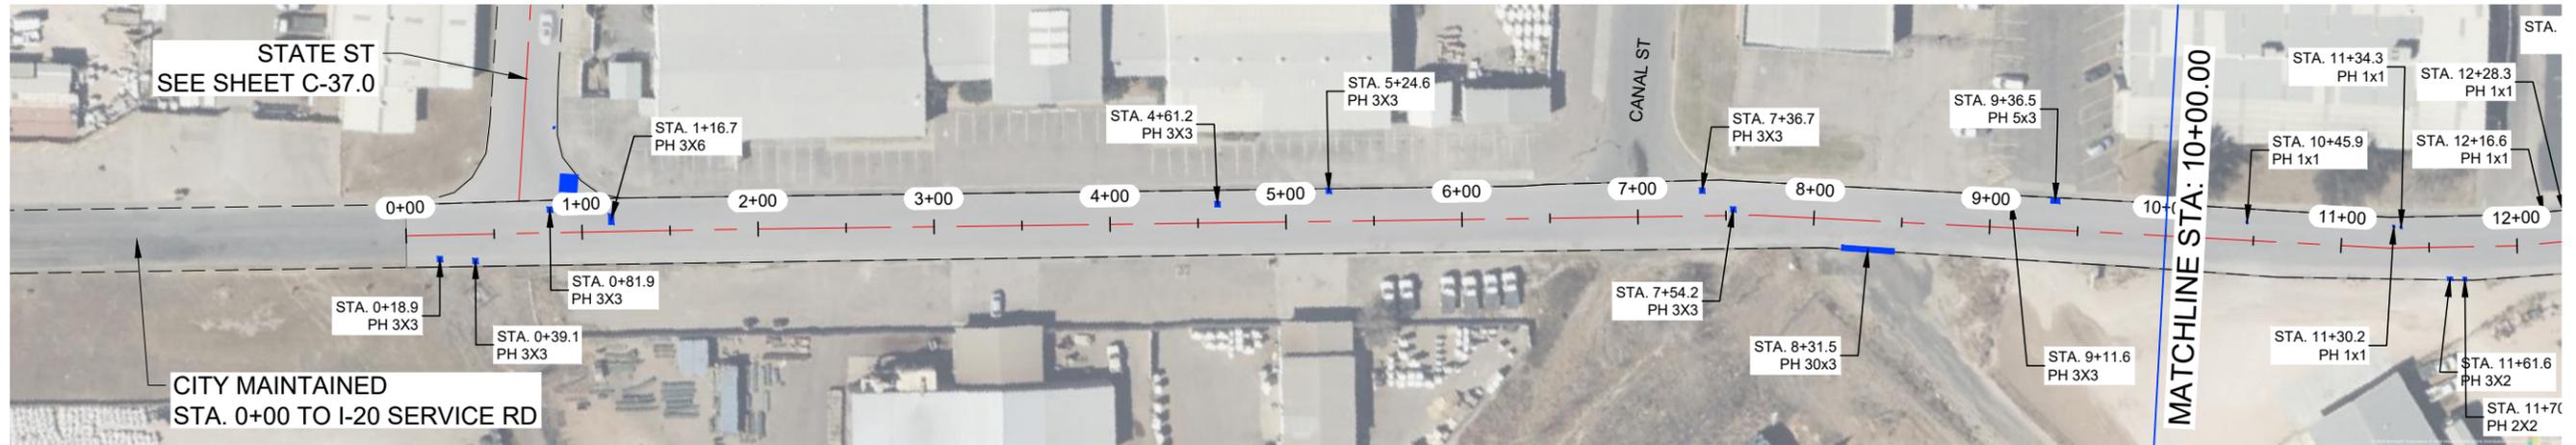

**COMMERCE DR**

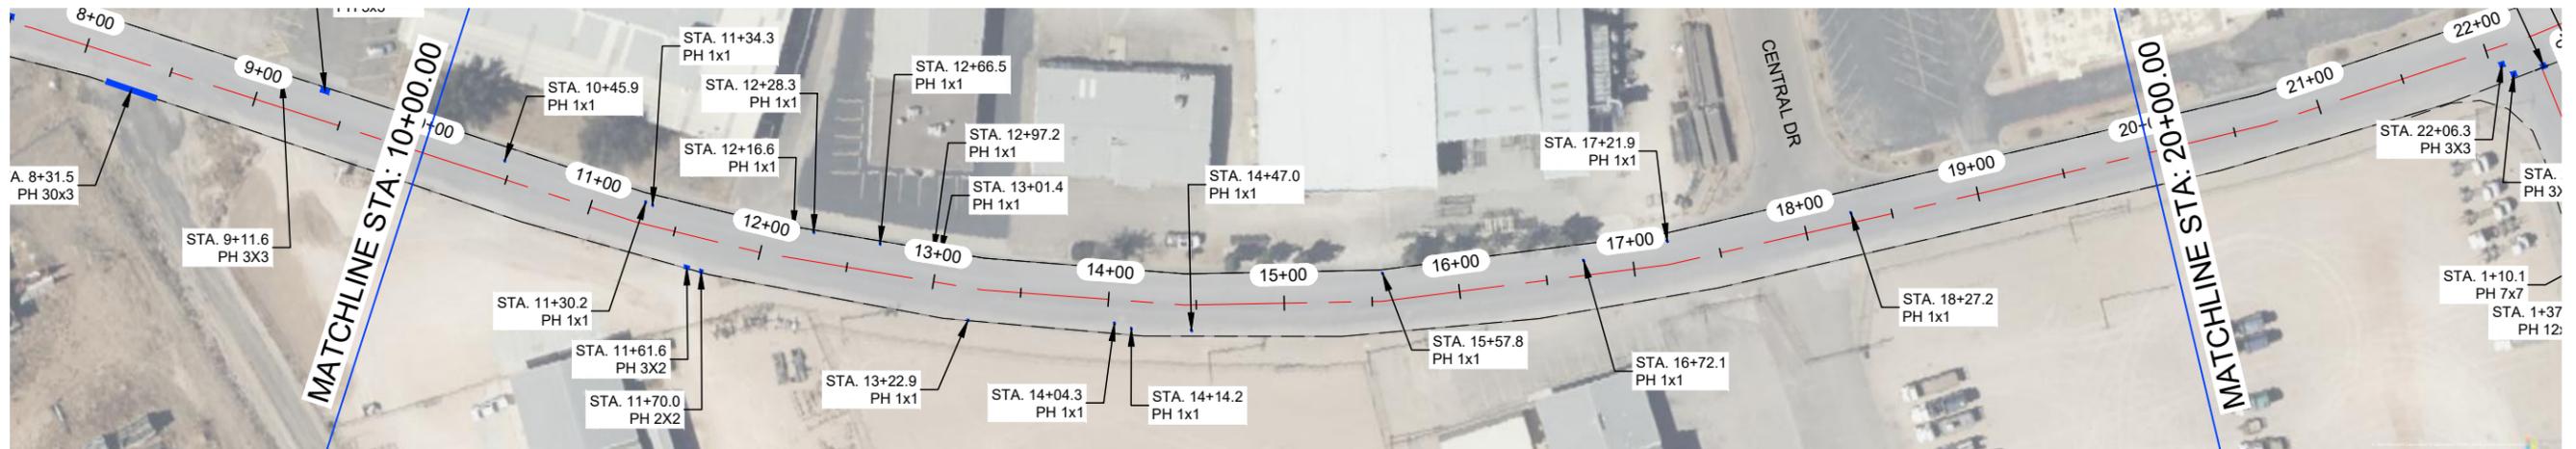


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

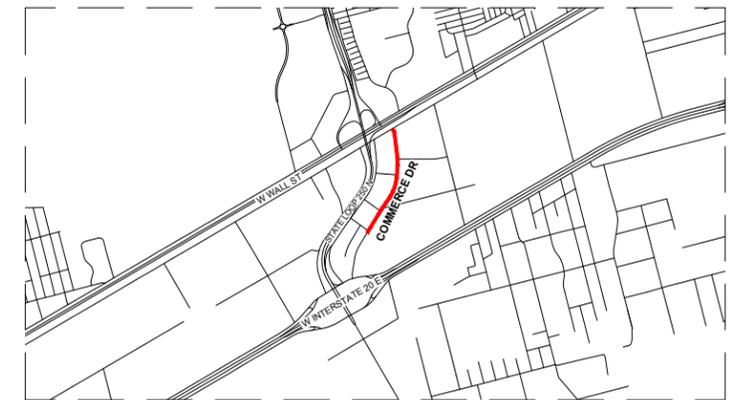

**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

COMMERCE DR QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	12 570	SY	
2	STRIPING	3 013	LF	
3	SOLID WHITE EDGE LINES	6 026	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	75.3	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	



**West Texas Consultants, Inc.**  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
COMMERCE DR						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	C-38.0	

DATE: 3/22/24 10:58 AM DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\38\COMMERCE DR-2024\38.017.PLM (R001)

COMMERCE DR

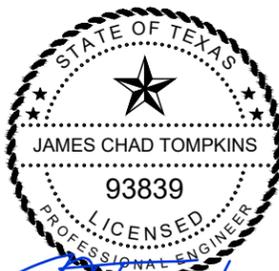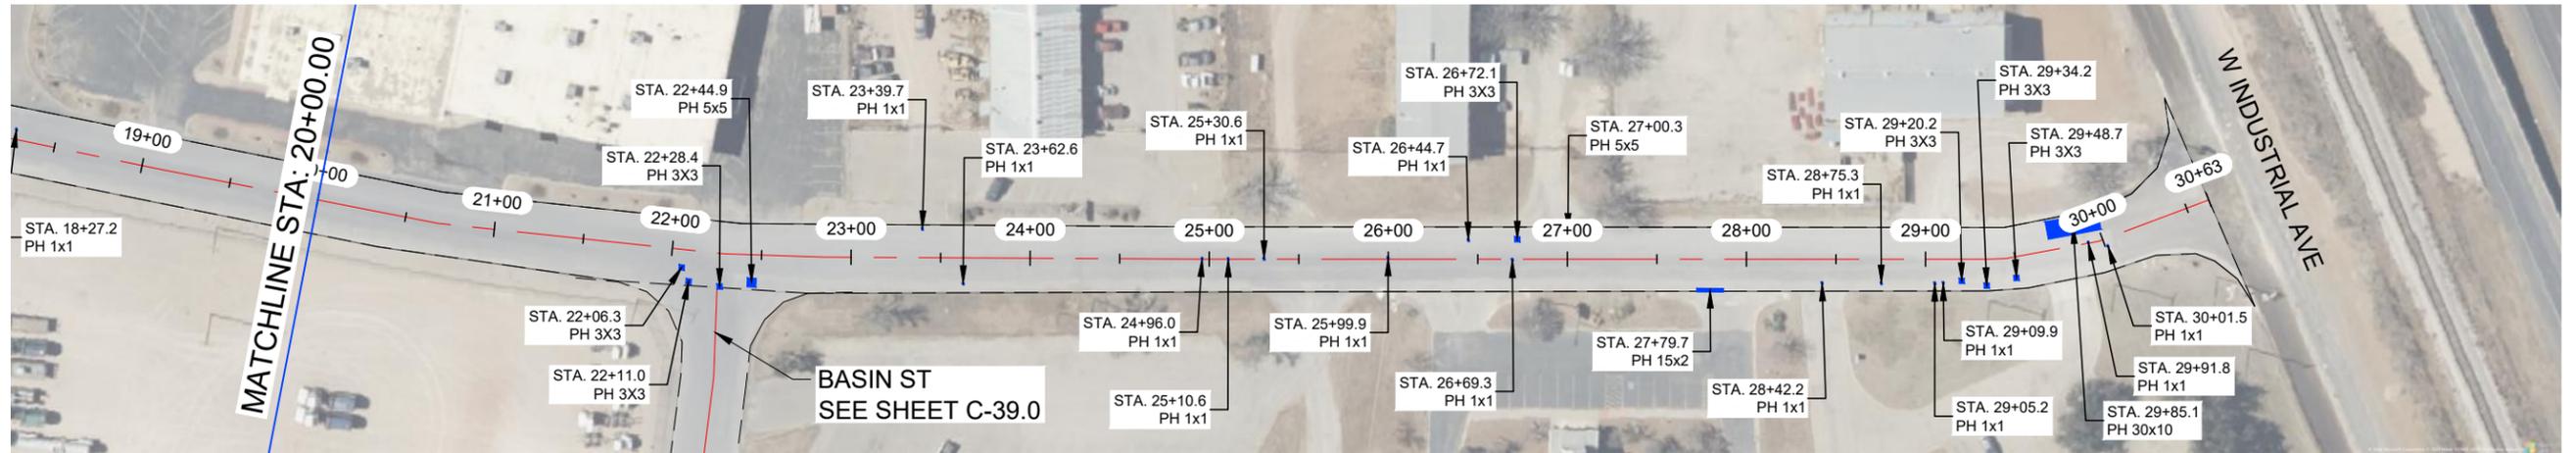


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

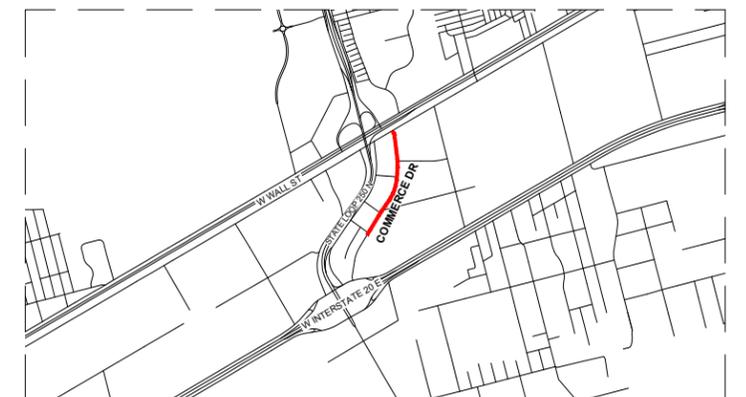

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

COMMERCE DR QUANTITIES			
ITEM #	ITEM	QTY.	UNIT
1	TWO-COURSE SEAL COAT (APPROX.)		SY
2	STRIPING		LF
3	SOLID WHITE EDGE LINES		LF
WORK BY OTHERS			
ITEM #	ITEM	QTY.	UNIT
1	POTHOLE REPAIR (BY OTHERS)		SY
2	EDGE PATCHING (BY OTHERS)		SY

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
COMMERCE DR					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	C-38.1

DATE: 3/22/24 11:58 AM PROJECT: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT SHEET: C-38.1 COMMERCE DR

**BASIN ST**



**BASIN ST**

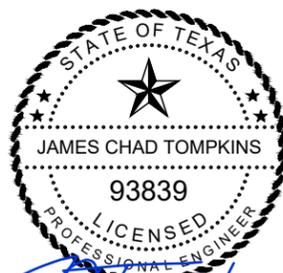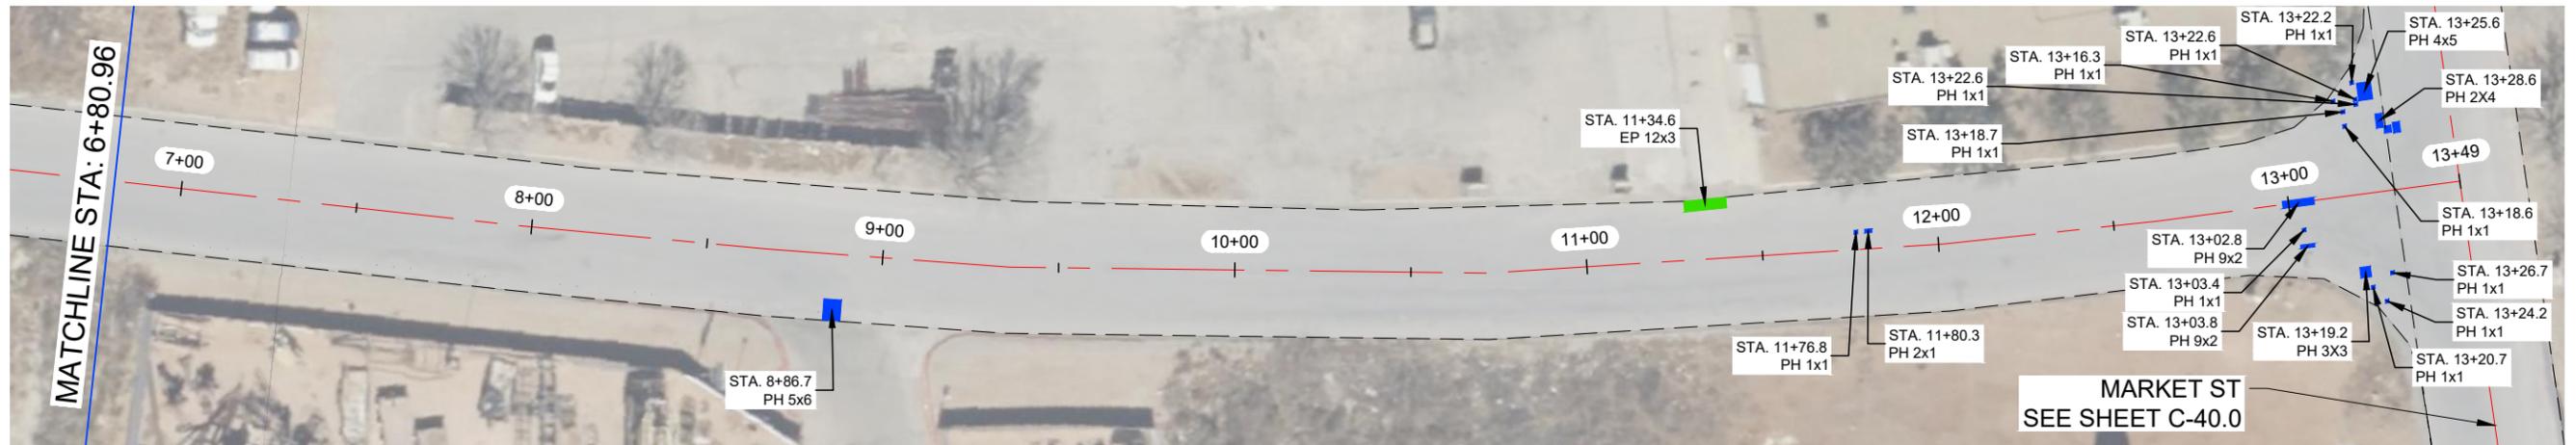


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

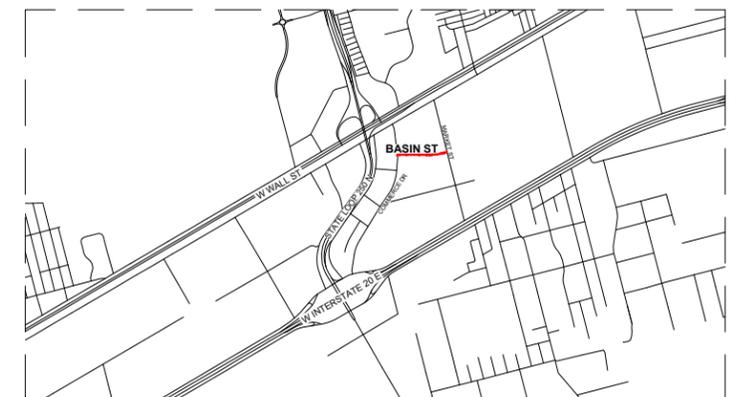

**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

BASIN ST QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5 628	SY	
2	STRIPING	1 300	LF	
3	SOLID WHITE EDGE LINES	2 600	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	26.3	SY	
2	EDGE PATCHING (BY OTHERS)	4.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

**MIDLAND COUNTY, TEXAS**


**2024 MIDLAND PAVEMENT MAINTENANCE PROJECT**

**BASIN ST**



DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 50'	C-39.0

DATE: 3/22/24 10:58 AM DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT LAYOUT FILE: C:\30\BASIN ST\2024\2024\_317\_PAV.MXD

**MARKET ST**

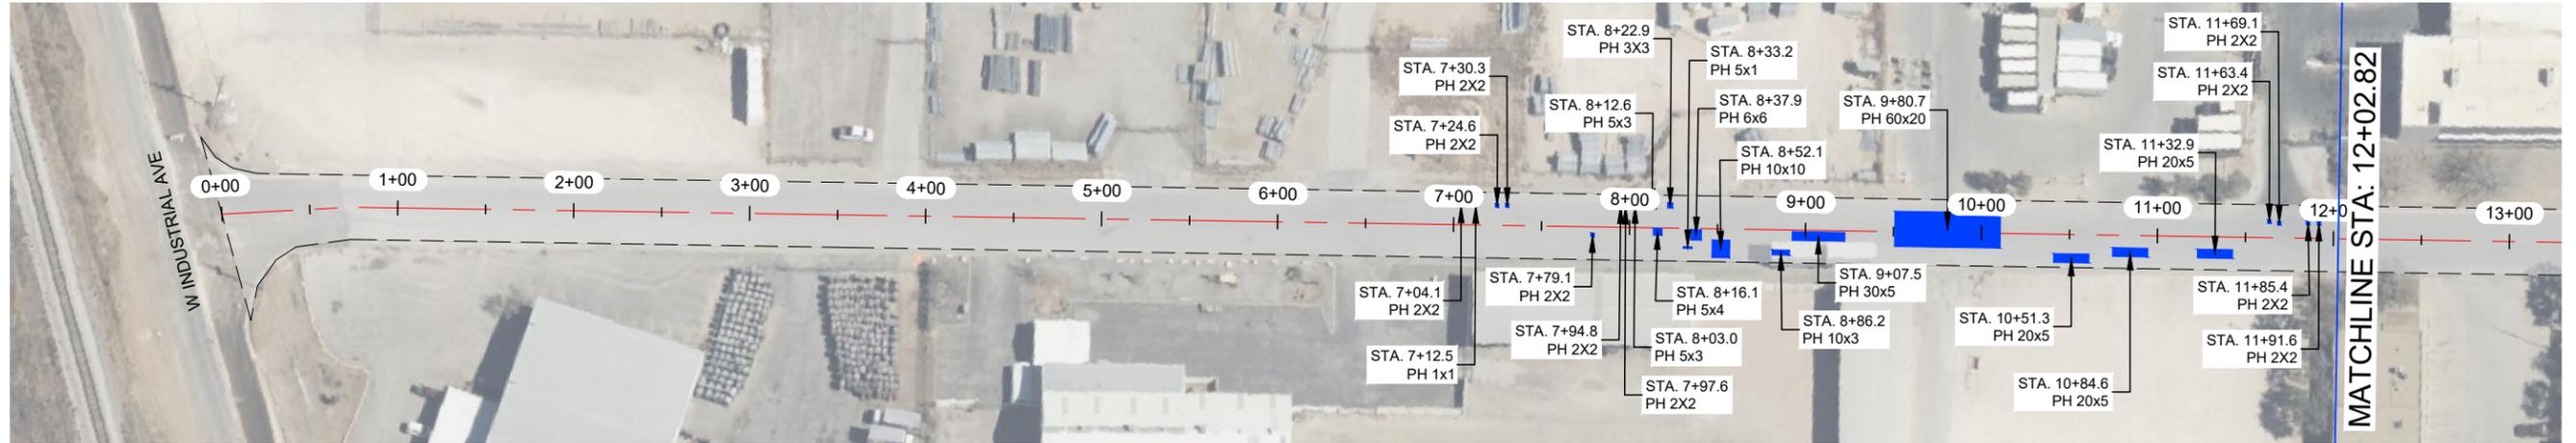



**MARKET ST**

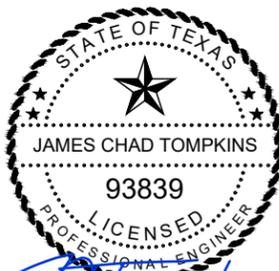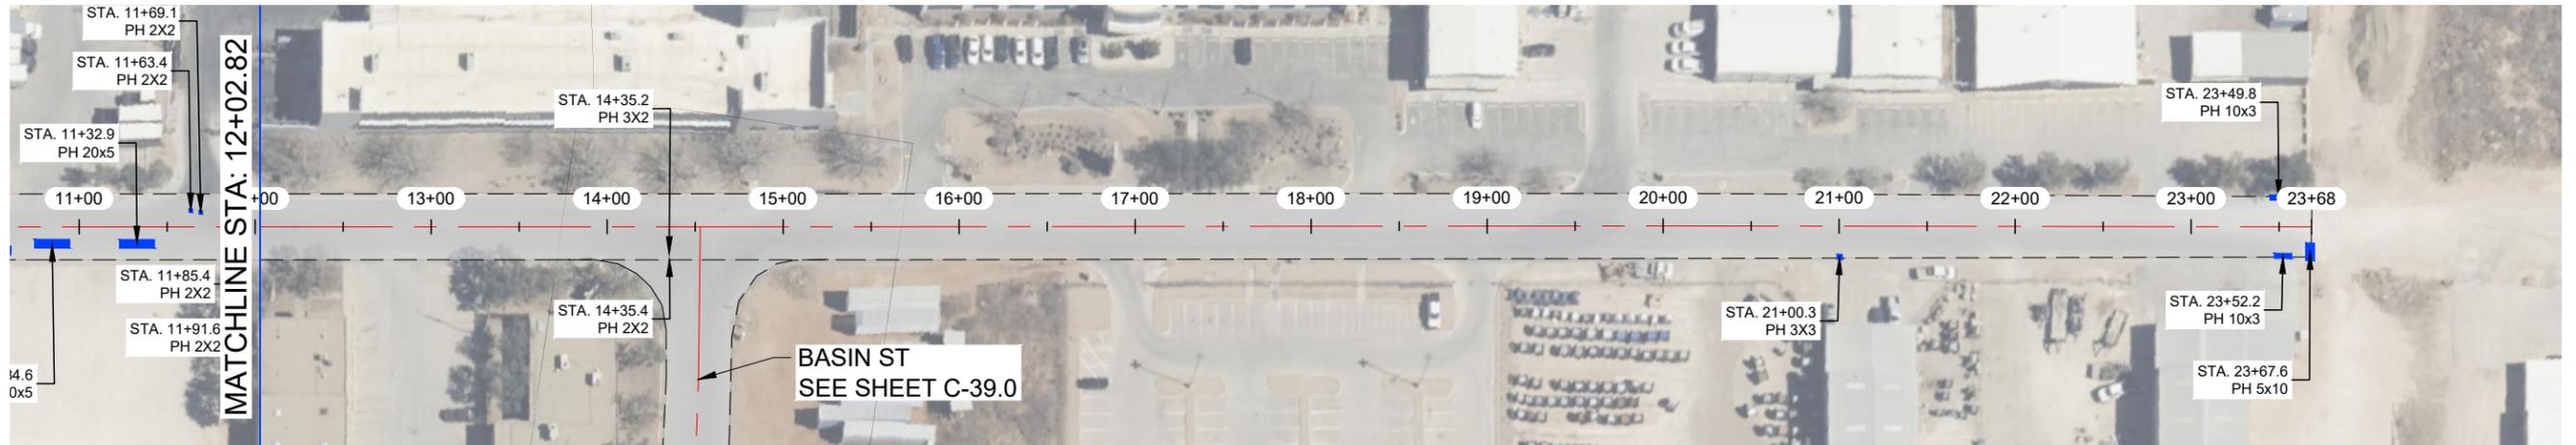

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS REQUIRED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

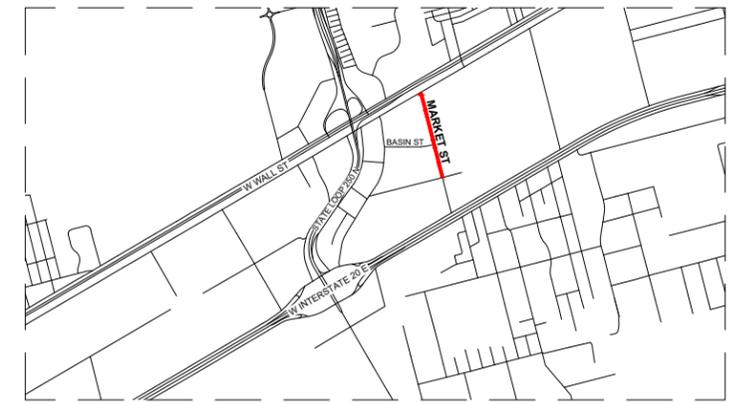

LEGEND	
	EXISTING CENTER LINE
	EXISTING END OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

MARKET ST QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	9 798	SY	
2	STRIPING	2 316	LF	
3	SOLID WHITE EDGE LINES	4 632	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	227.8	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS

2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

MARKET ST

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	C-40.0

# MIDLAND COUNTY, TEXAS 2024 PAVEMENT MAINTENANCE PROJECT PRECINCT 2

MARCH 2024

## TWO-COURSE SEAL COAT



**MIDLAND COUNTY  
TEXAS**

**OWNER:**

MIDLAND COUNTY, MIDLAND, TX.

**UTILITY RELOCATION NOTICE:**

CONTRACTOR SHALL CONTACT THE APPROPRIATE UTILITY COMPANY TO COORDINATE THE RELOCATION OF ANY UTILITY THAT IS FOUND TO BE IN CONFLICT WITH THESE CONSTRUCTION DOCUMENTS.



PREPARED BY



**WEST TEXAS CONSULTANTS, INC.**


ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street  
Andrews, TX 79714  
(432) 523-2181

TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

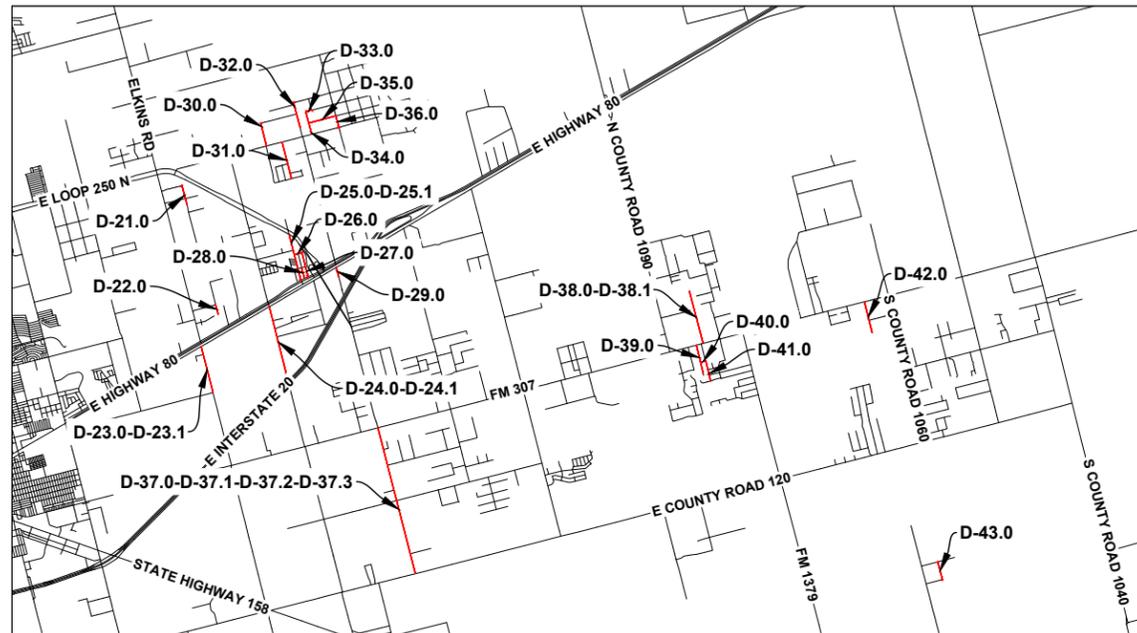



**SHEET INDEX**

D-1.0 - S COUNTY ROAD 1189	D-24.0 - N COUNTY ROAD 1140
D-2.0 - E COUNTY ROAD 136 -1	D-24.1 - N COUNTY ROAD 1140
D-3.0 - S COUNTY ROAD 1185 -3	D-25.0 - N COUNTY ROAD 1135 -2
D-4.0 - E COUNTY ROAD 137	D-25.1 - N COUNTY ROAD 1135 -2
D-5.0 - S COUNTY ROAD 1187	D-26.0 - E COUNTY ROAD 75 1-2
D-6.0 - S COUNTY ROAD 1186	D-27.0 - N COUNTY ROAD 1134
D-7.0 - S COUNTY ROAD 1185 -2	D-28.0 - N COUNTY ROAD 1134 1-2
D-8.0 - S COUNTY ROAD 1185 -1	D-29.0 - N COUNTY ROAD 1130 -2
D-8.1 - S COUNTY ROAD 1185 -1	D-30.0 - N COUNTY ROAD 1135-1
D-8.2 - S COUNTY ROAD 1185 -1	D-31.0 - N COUNTY ROAD 1133
D-9.0 - S COUNTY ROAD 1183	D-32.0 - N COUNTY ROAD 1130 -1
D-10.0 - S COUNTY ROAD 1169	D-33.0 - E COUNTY ROAD 57
D-11.0 - S COUNTY ROAD 1167	D-34.0 - N COUNTY ROAD 1129
D-12.0 - E COUNTY ROAD 149	D-35.0 - E COUNTY ROAD 59
D-13.0 - E COUNTY ROAD 139	D-36.0 - N COUNTY ROAD 1125
D-14.0 - S COUNTY ROAD 1157	D-37.0 - S COUNTY ROAD 1130
D-15.0 - E COUNTY ROAD 136 -2	D-37.1 - S COUNTY ROAD 1130
D-16.0 - E COUNTY ROAD 129	D-37.2 - S COUNTY ROAD 1130
D-17.0 - S COUNTY ROAD 1175	D-37.3 - S COUNTY ROAD 1130
D-18.0 - S COUNTY ROAD 1172	D-38.0 - S COUNTY ROAD 1085 -2
D-19.0 - E COUNTY ROAD 123	D-38.1 - S COUNTY ROAD 1085 -2
D-20.0 - S COUNTY ROAD 1180	D-39.0 - S COUNTY ROAD 1086
D-21.0 - N COUNTY ROAD 1148	D-40.0 - E COUNTY ROAD 102
D-22.0 - N COUNTY ROAD 1147	D-41.0 - S COUNTY ROAD 1085 -1
D-23.0 - ELKINS RD	D-42.0 - S COUNTY ROAD 1063 -2
D-23.1 - ELKINS RD	D-43.0 - S COUNTY ROAD 1063 -1



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**S COUNTY ROAD 1189**

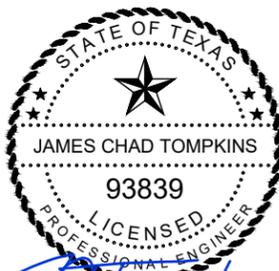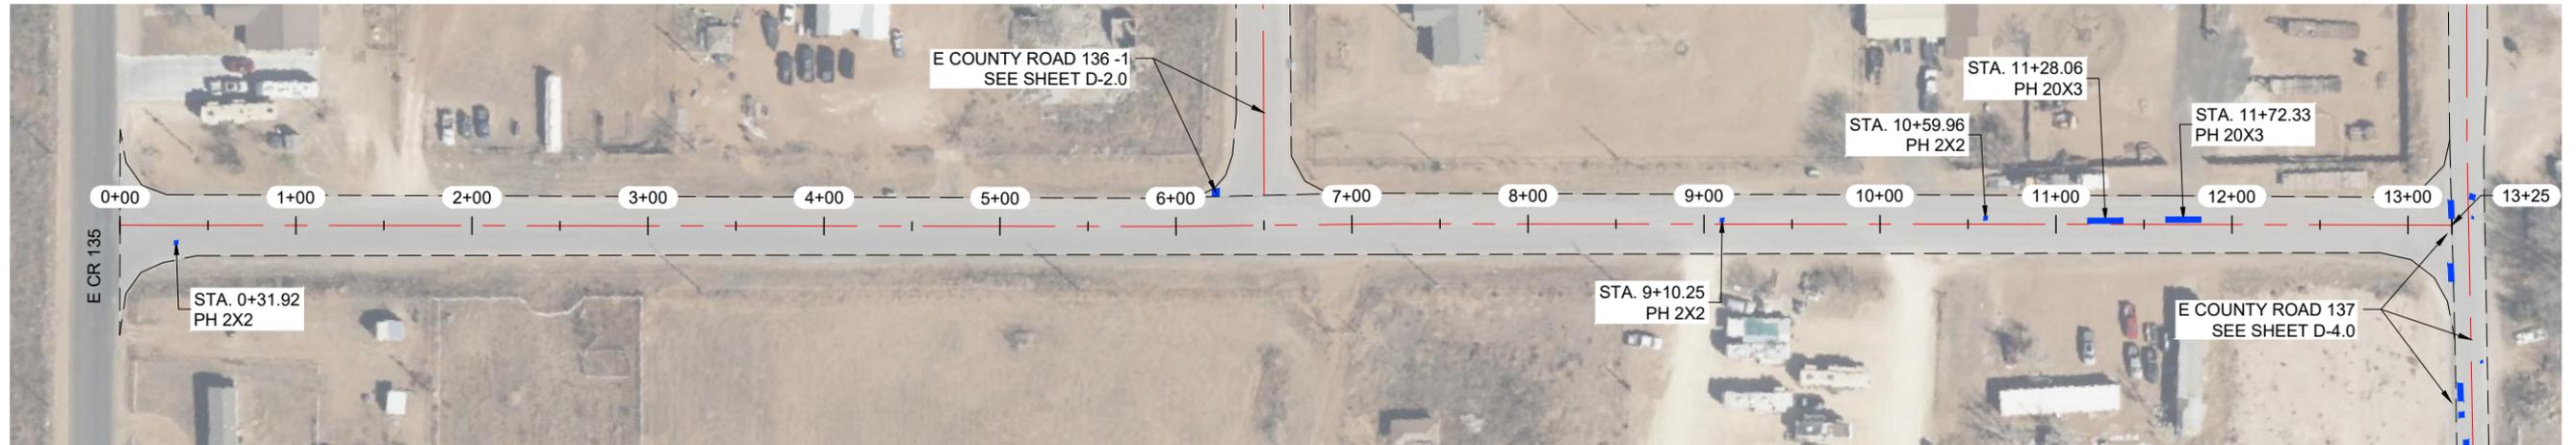

*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1189 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5 043	SY	
2	STRIPING	1 275	LF	
3	SOLID WHITE EDGE LINES	2 550	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	14.7	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
 ENGINEERS | SURVEYORS  
 West Texas Consultants, Inc.  
 ENGINEERS PLANNERS SURVEYORS  
 405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
 TEXAS REGISTERED ENGINEERING FIRM F-2746  
 TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
 STOP! CALL 1-800-245-4545  
 TOLL-FREE OSHA RULE 1926.651  
 REQUIRES PREVIOUS NOTIFICATION  
 TEXAS ONE CALL SYSTEM


MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1189						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-1.0	

PLAT X: PROJECT ENGINEERING & SURVEYING TEXAS MIDLAND COUNTY PAVING 2024 - DESIGN 06/26 - DRAWINGS 05/06/2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB D-1.0 S COUNTY ROAD 1189 3/22/2024 3:18 PM ROMERO

E COUNTY ROAD 136 -1

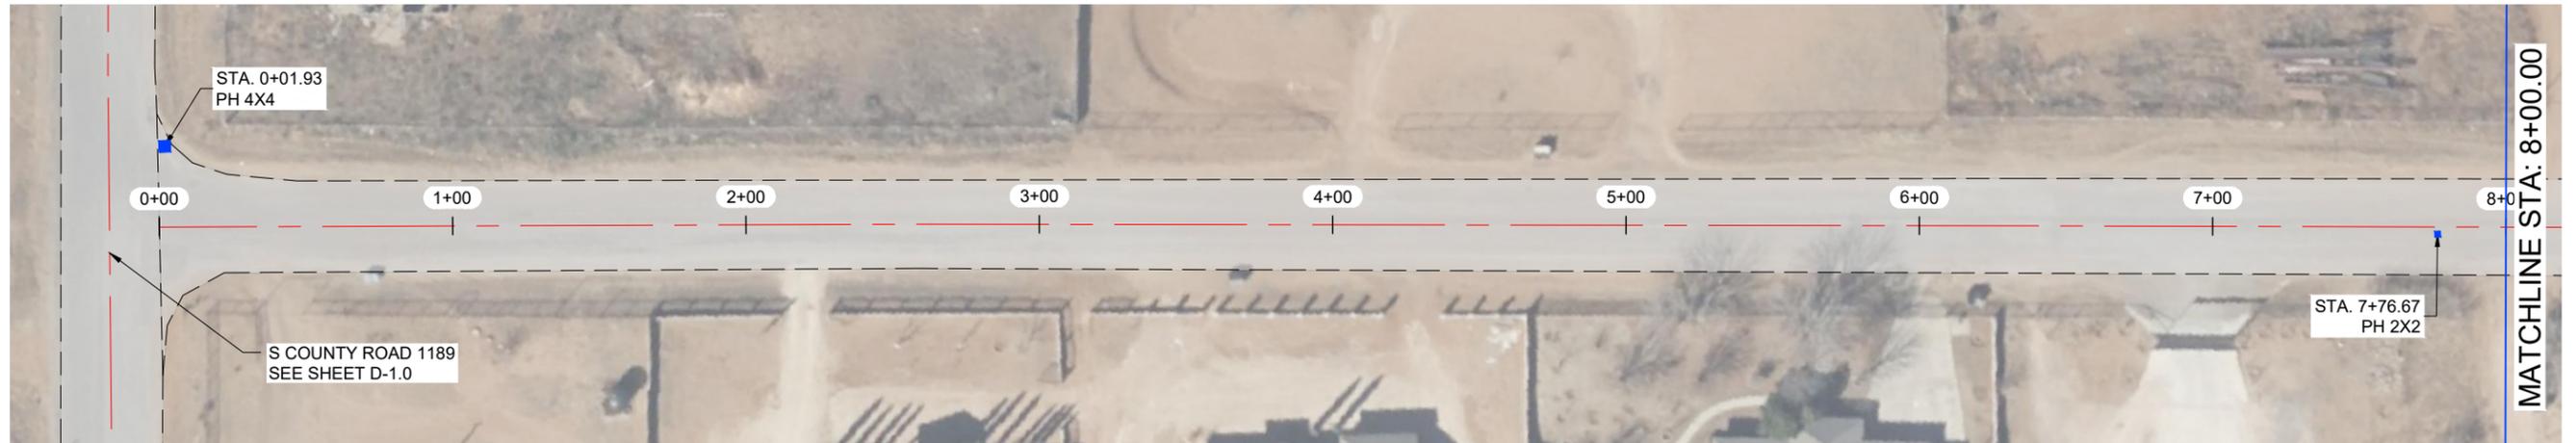

E COUNTY ROAD 136 -1

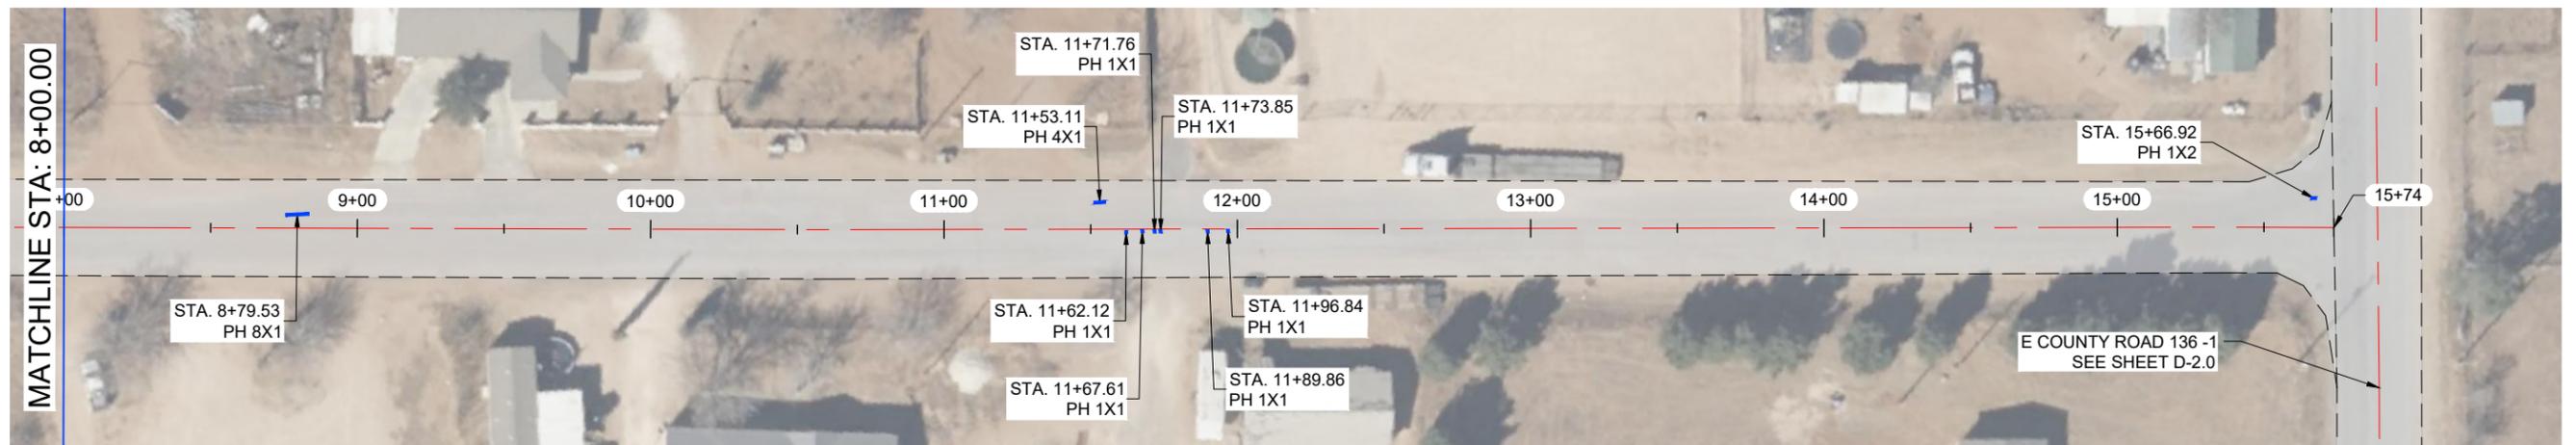

*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



VICINITY MAP  
N.T.S.

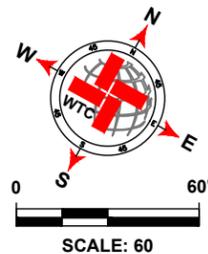

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

E COUNTY ROAD 136 -1 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5 654	SY	
2	STRIPING	1 524	LF	
3	SOLID WHITE EDGE LINES	3 048	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	4.4	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
E COUNTY ROAD 136 -1						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 60'	D-2.0	



**E COUNTY ROAD 137**

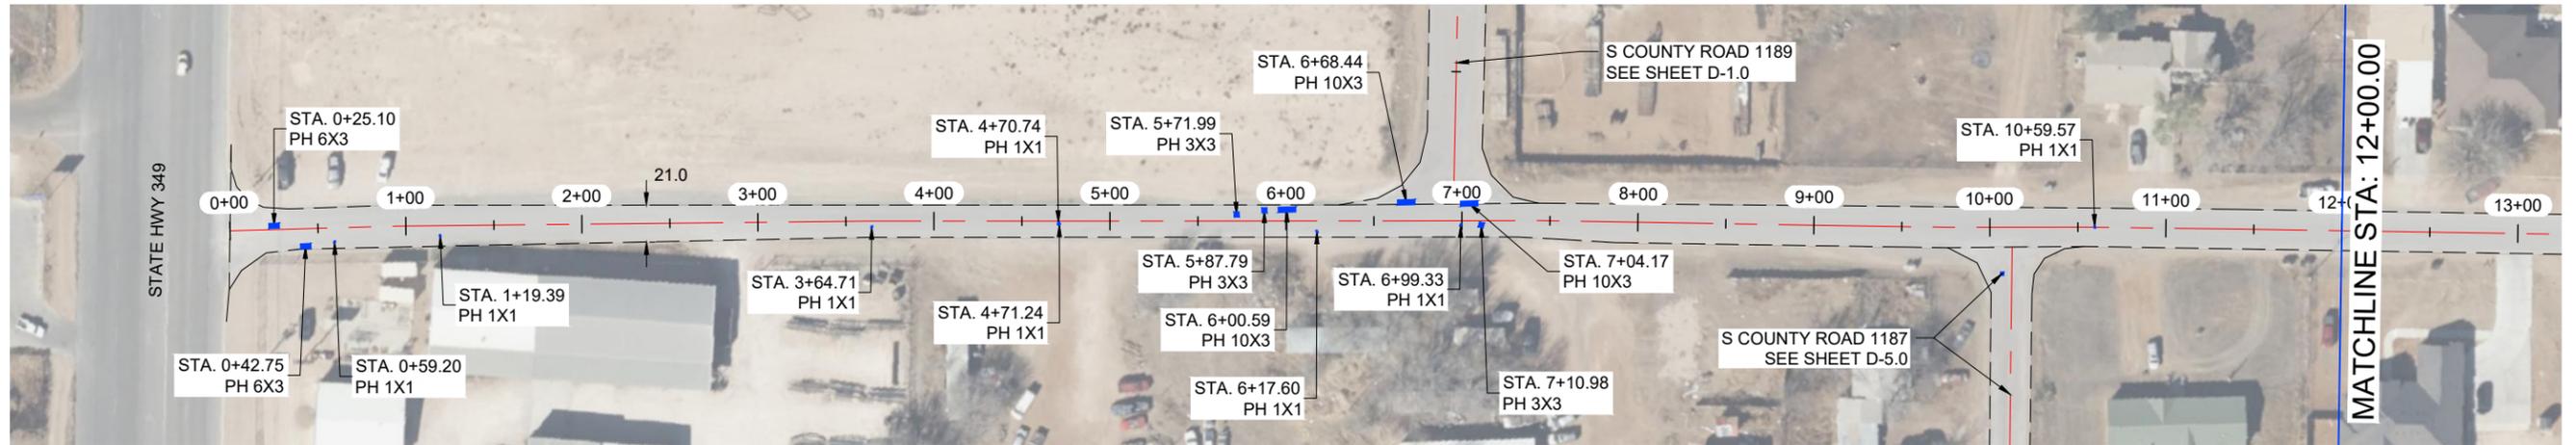

**E COUNTY ROAD 137**

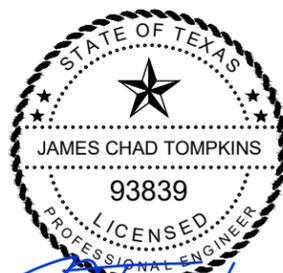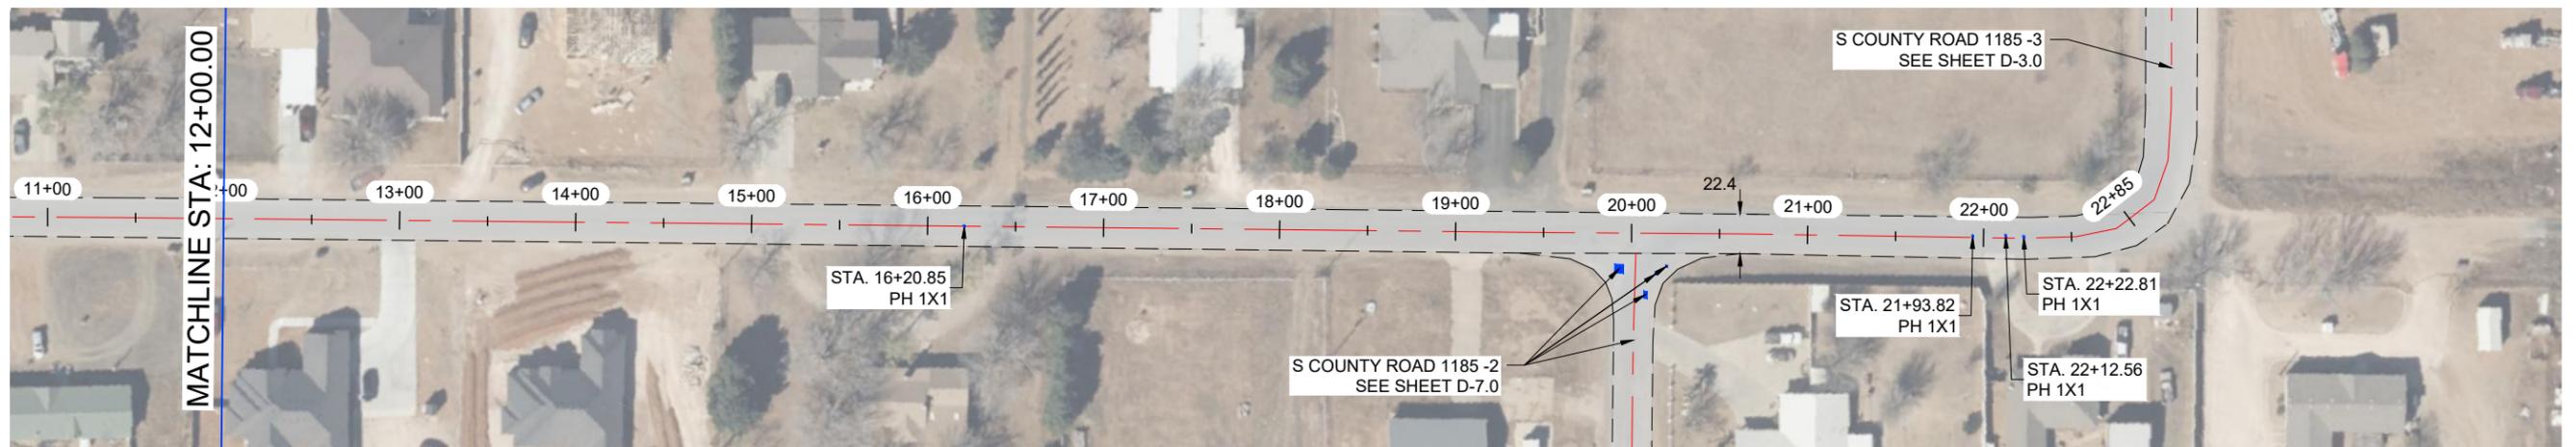


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

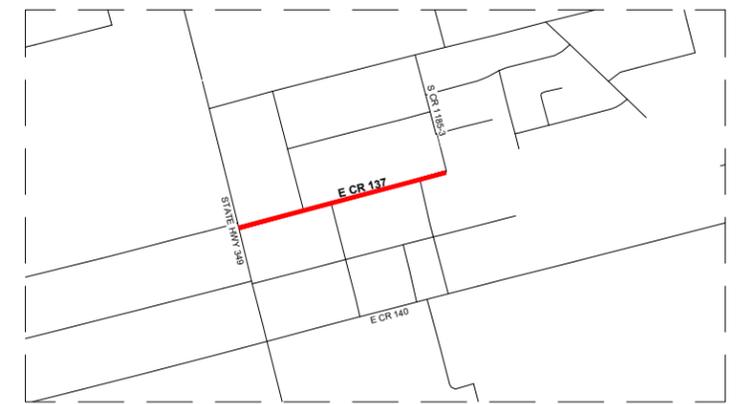

**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

E COUNTY ROAD 137 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5 602	SY	
2	STRIPING	2 260	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	18.3	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE



LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
E COUNTY ROAD 137					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-4.0

PLAT. X: PROJECT ENGINEERING & SURVEYING TEXAS MIDLAND COUNTY PAVING 2024 - DESIGN 06/26 - DRAWINGS DIVISION 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB. 04.0 E COUNTY ROAD 137 3/22/2024 3:07 PM R000000

**S COUNTY ROAD 1187**

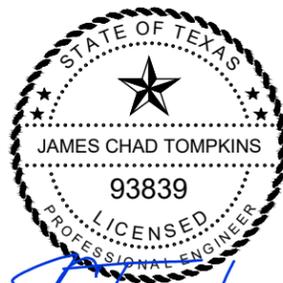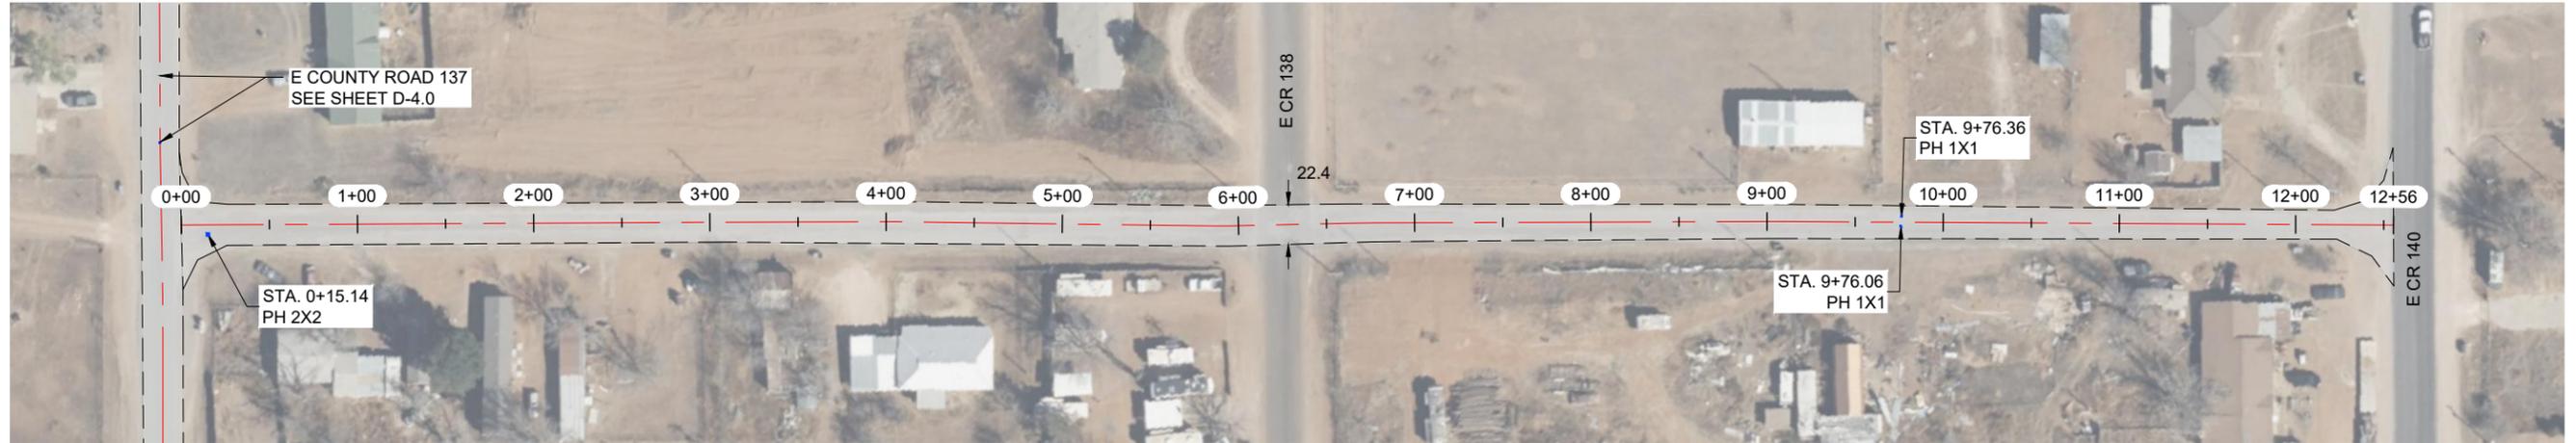


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

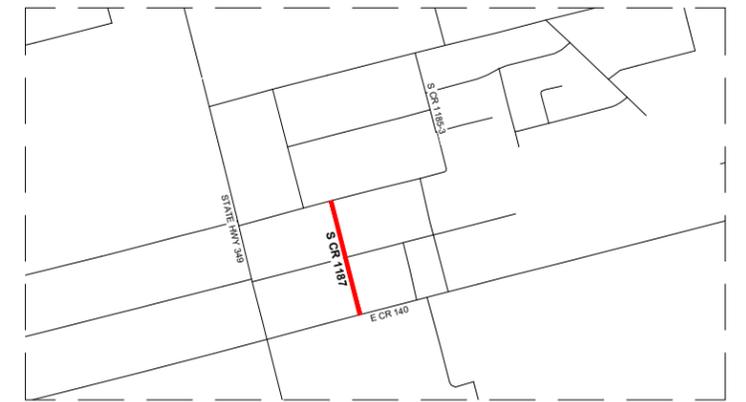

**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1187 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	3 040	SY	
2	STRIPING	1 206	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.7	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545





TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1187						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-5.0	

PLAT X: PROJECT ENGINEERING & SURVEYING TEXAS MIDLAND COUNTY PAVING 2024 - DESIGN 05/26/24 - DRAWINGS 05/26/24 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB D-5.0 S COUNTY ROAD 1187 3/22/2024 3:17 PM ROMERO

S COUNTY ROAD 1186

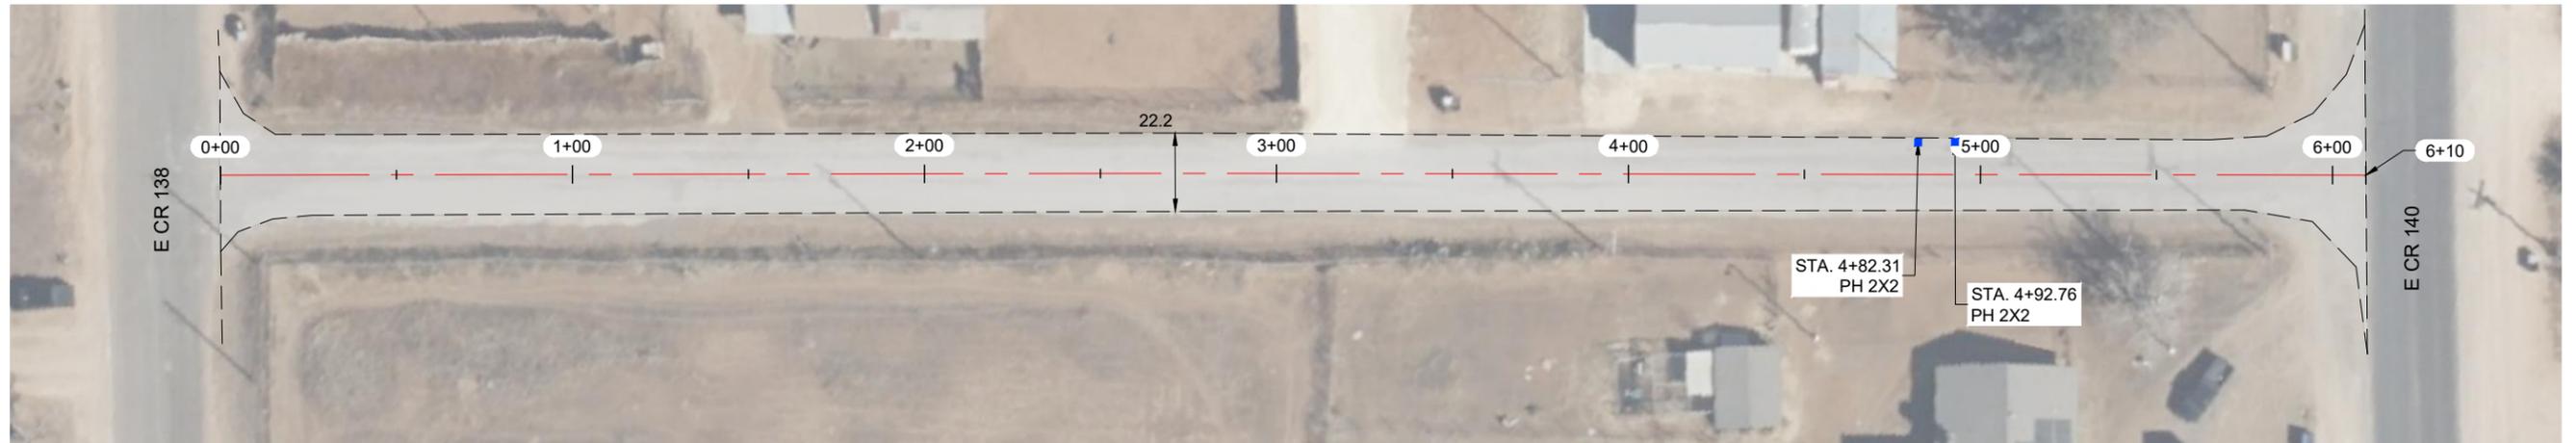


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024


*J. Tompkins*

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

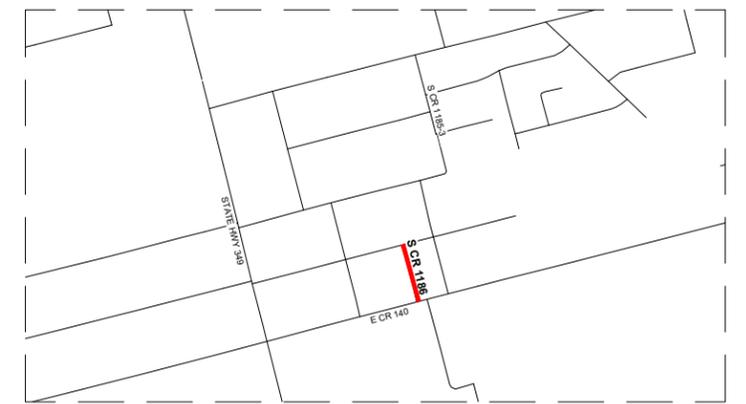

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1186 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	1 546	SY	
2	STRIPING	560	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.9	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.



CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
S COUNTY ROAD 1186					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 50'	D-6.0

S COUNTY ROAD 1185 -2

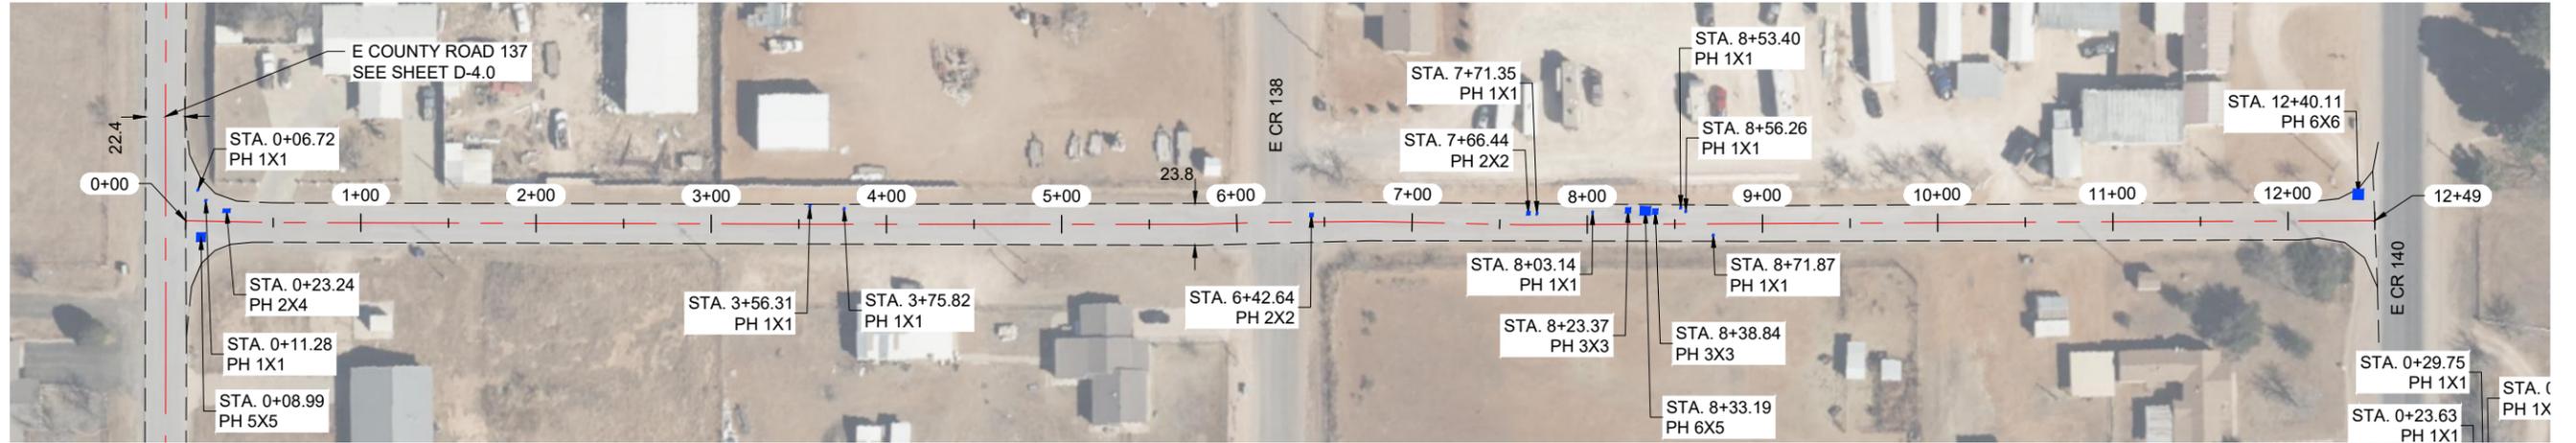


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

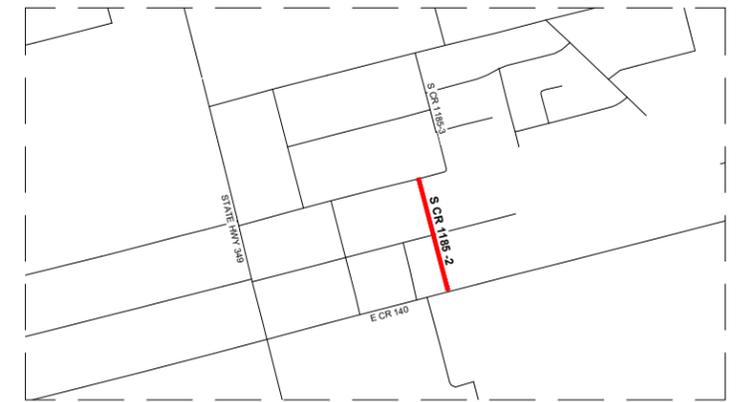

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1185 -2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	3 178	SY	
2	STRIPING	1 199	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	14.9	SY	
2	EDGE PATCHING (BY OTHERS)	0.00	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM


MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
S COUNTY ROAD 1185 -2					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-7.0

PLAT: X:\PROJECTS\ENGINEERING & SURVEY\TEXAS\MIDLAND COUNTY PAVING\2024\MIDLAND PAVEMENT MAINTENANCE PROJECT\FIG 01.DWG S COUNTY ROAD 1185 -2.DWG 3/22/24 3:07 PM RMO/ERO






S COUNTY ROAD 1185 -1

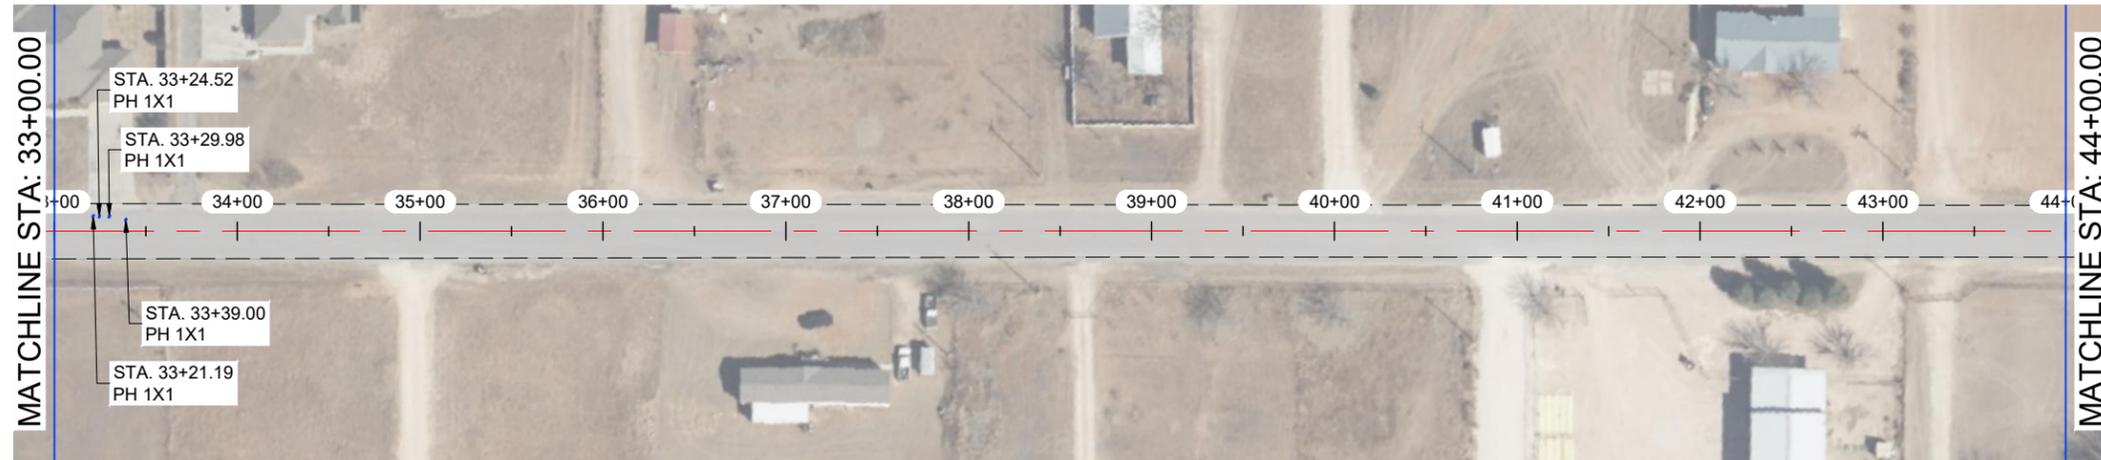


S COUNTY ROAD 1185 -1

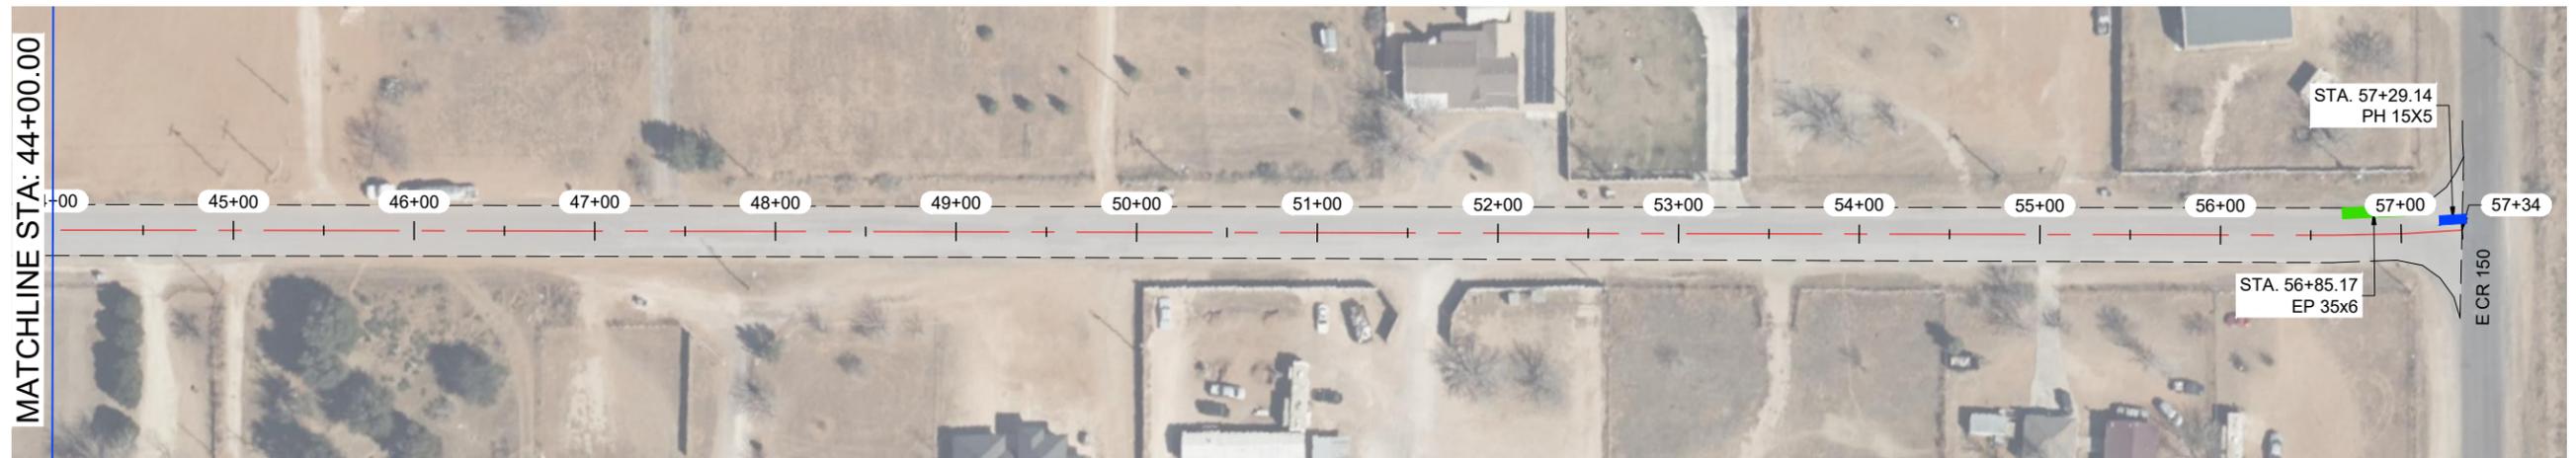


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

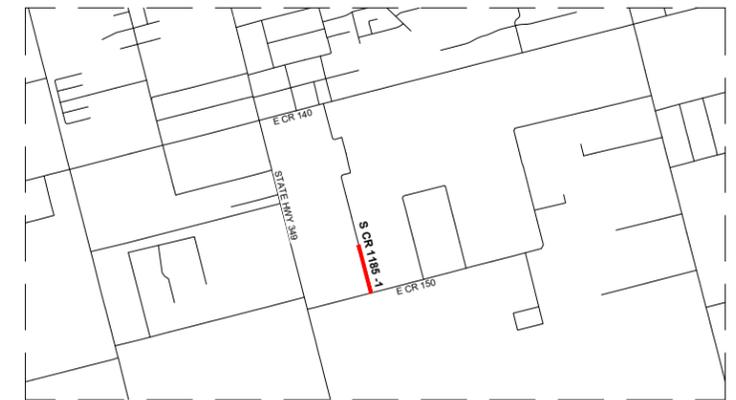

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1185 -1 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)		SY	
2	STRIPING		LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)		SY	
2	EDGE PATCHING (BY OTHERS)		SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1185 -1						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-8.2	

**S COUNTY ROAD 1183**

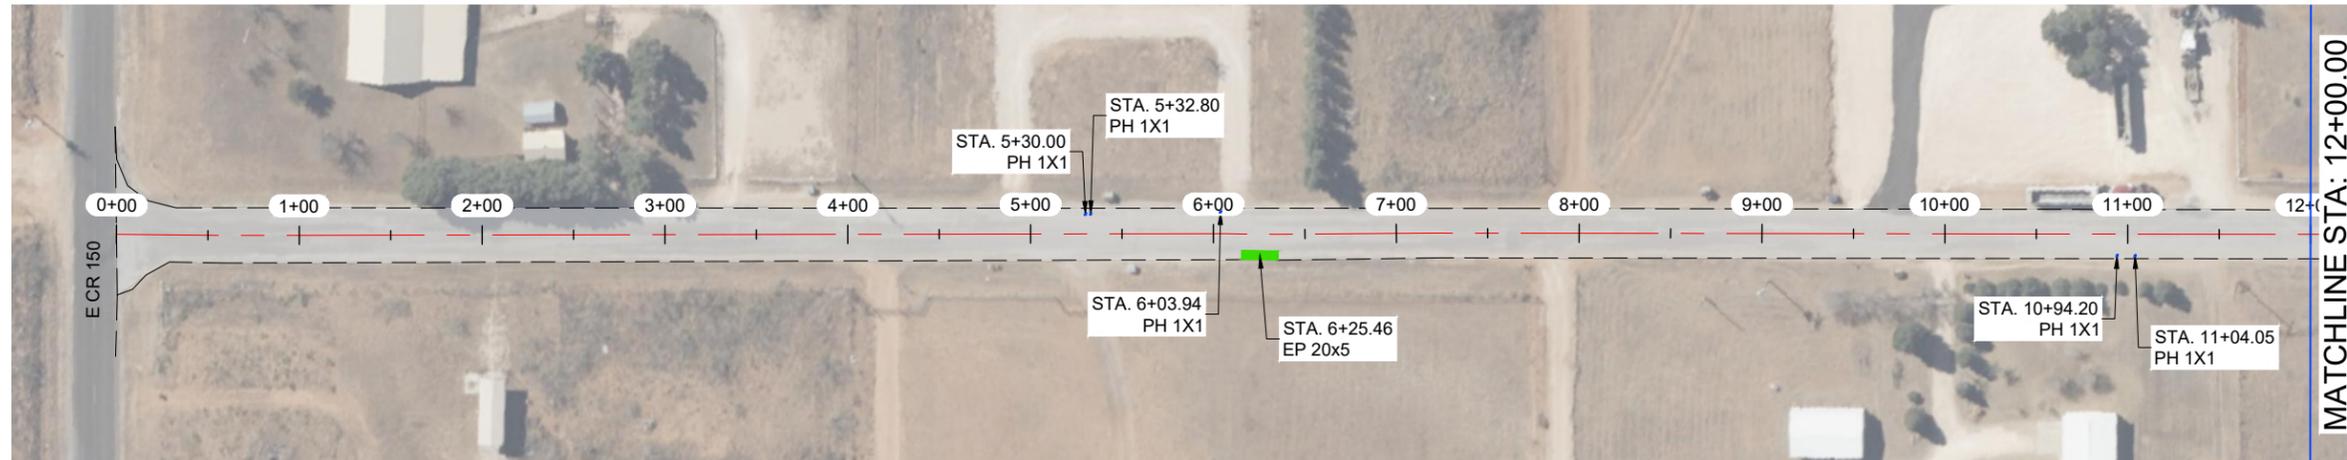

**S COUNTY ROAD 1183**

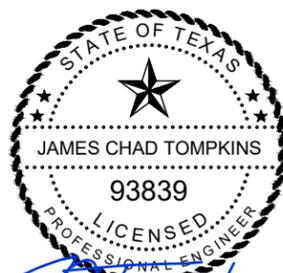

*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1183 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	7 351	SY	
2	STRIPING	2 374	LF	
3	SOLID WHITE EDGE LINES	4 748	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.7	SY	
2	EDGE PATCHING (BY OTHERS)	11.1	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM


MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
S COUNTY ROAD 1183					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-9.0

PLAT X: PROJECT ENGINEERING & SURVEYING TEXAS MIDLAND COUNTY PAVING 2024 - DESIGN 06/26 - DRAWINGS DIVISION 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB D-9.0 S COUNTY ROAD 1183 2/22/2024 BY FAN ROMERO

S COUNTY ROAD 1169




S COUNTY ROAD 1169

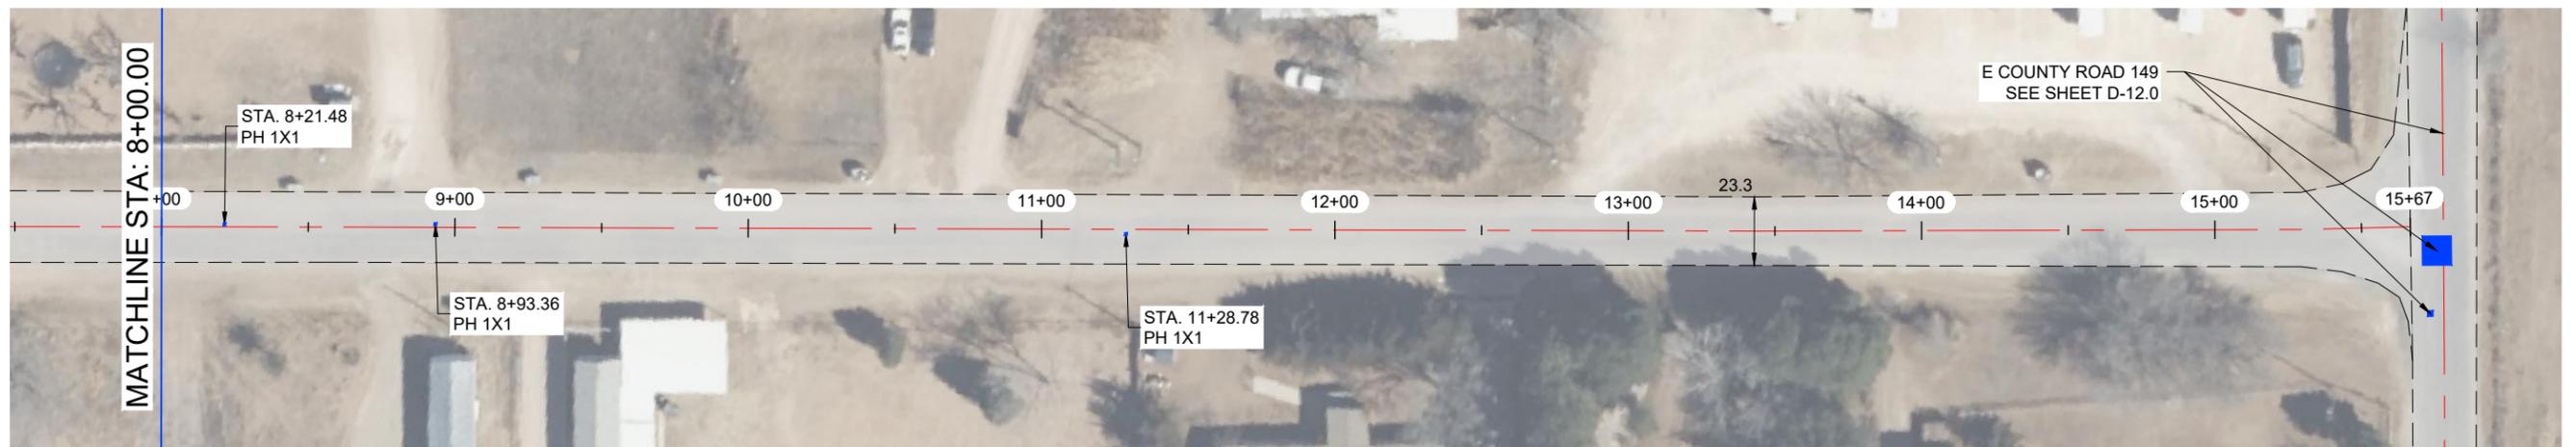


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

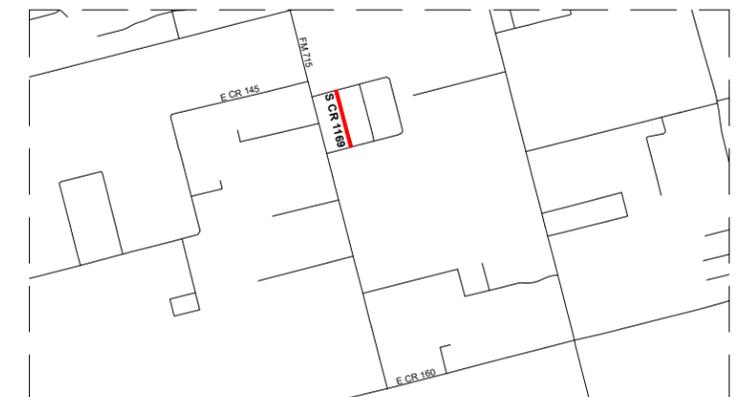

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1169 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	4 504	SY	
2	STRIPING	1 517	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.8	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1169						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 60'	D-10.0	







E COUNTY ROAD 139

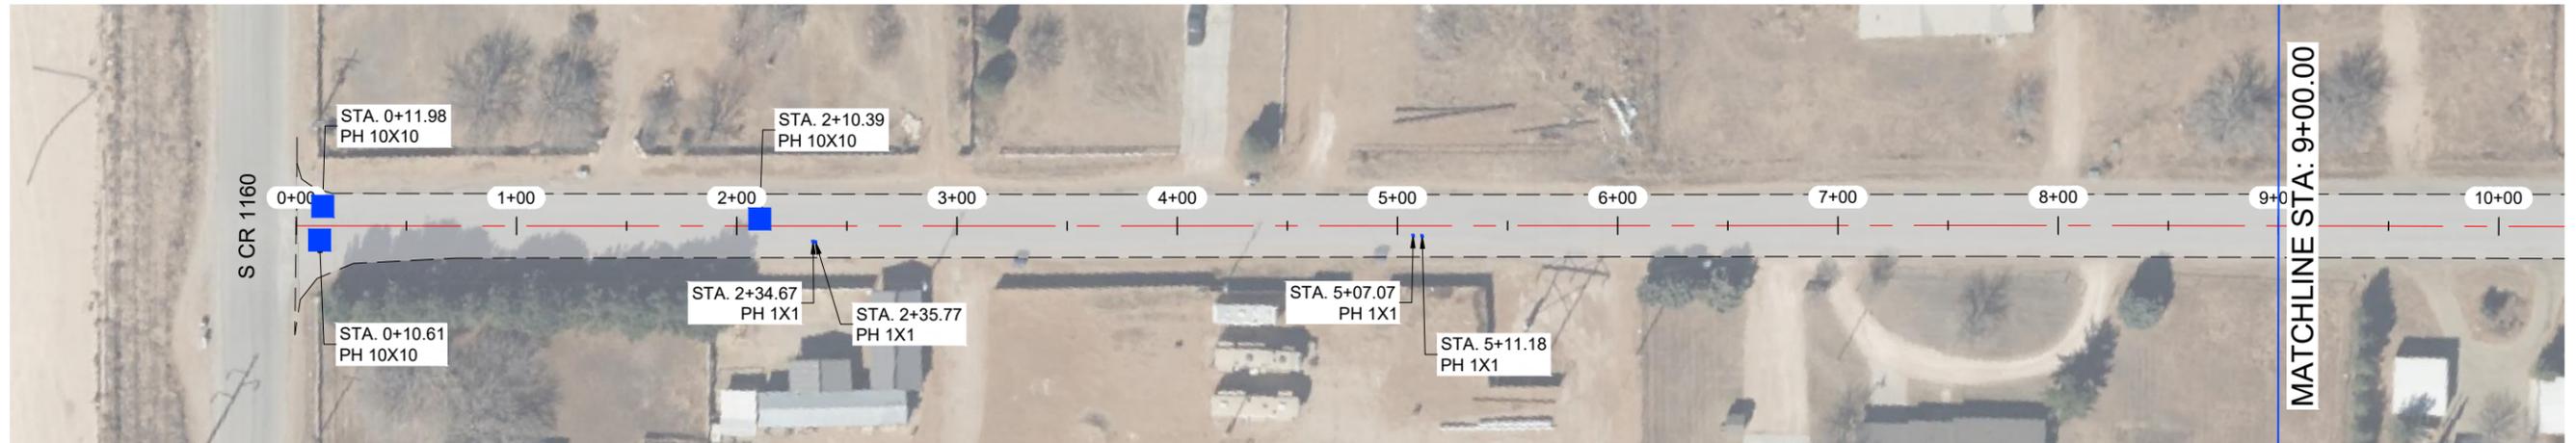

E COUNTY ROAD 139

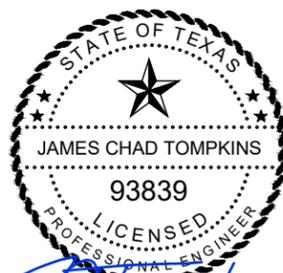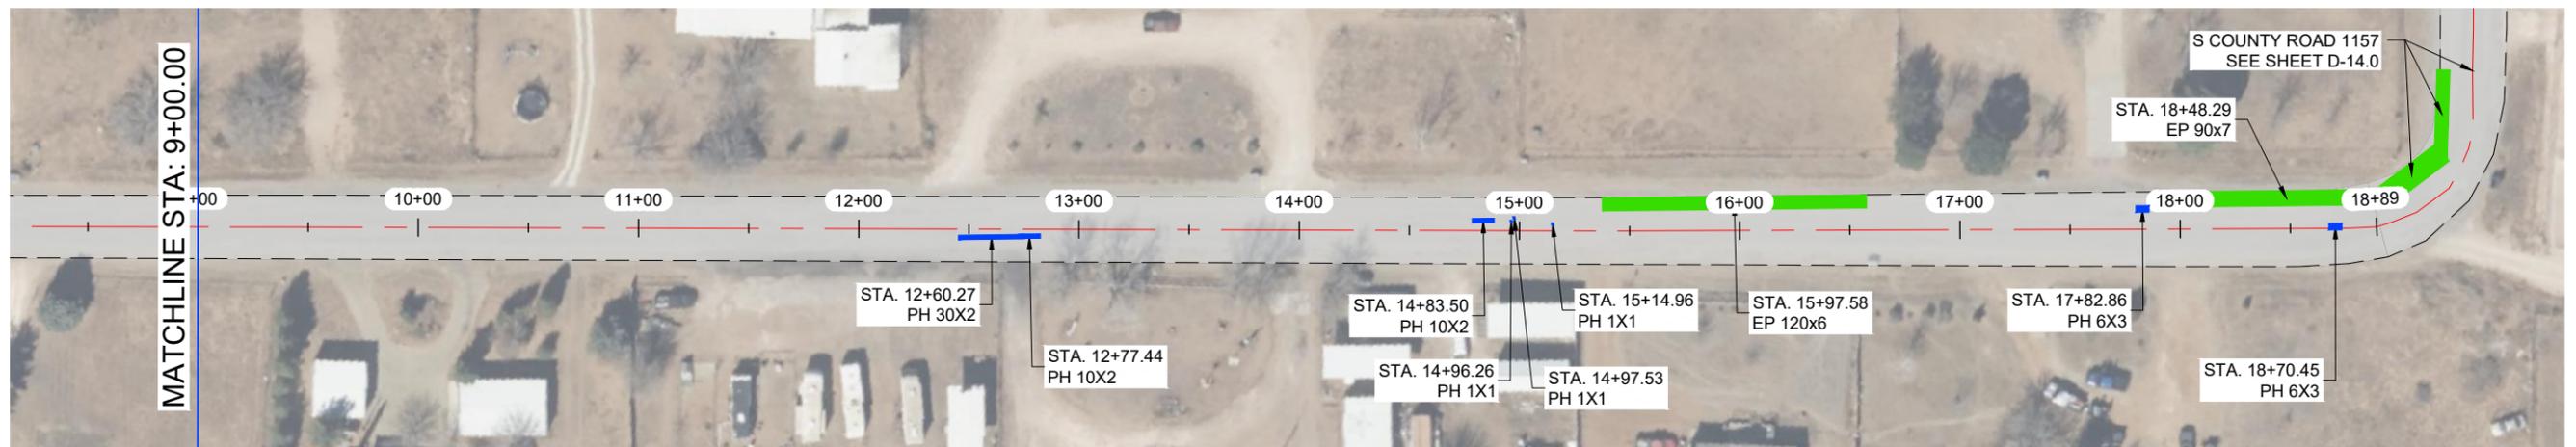

*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

E COUNTY ROAD 139 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	6 253	SY	
2	STRIPING	1 864	LF	
3	SOLID WHITE EDGE LINES	3 728	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	49.2	SY	
2	EDGE PATCHING (BY OTHERS)	150.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS



2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

E COUNTY ROAD 139

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 80'	D-13.0

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\TEXAS\MIDLAND COUNTY PAVING\2024 - DESIGN\65276 - DRAWINGS\DWG\65276\MIDLAND PAVEMENT MAINTENANCE PROJECT\FIG1.LAYOUT.TAB: D:\13.0 E COUNTY ROAD 139\2024\3\22\2024\3\22.PDW: RDM


**S COUNTY ROAD 1157**

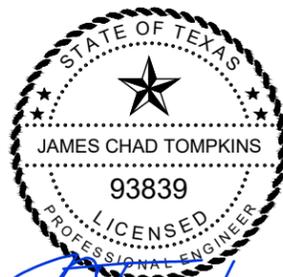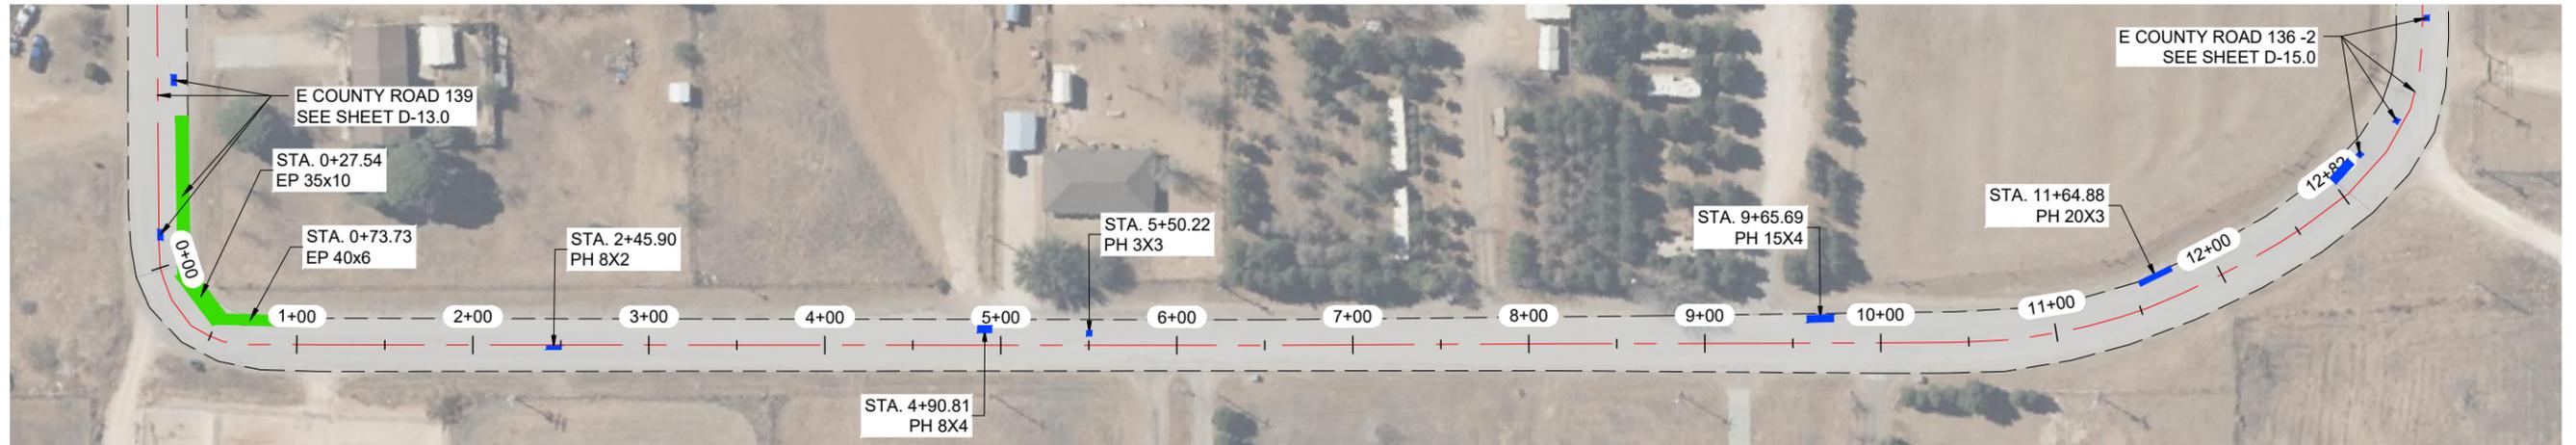


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

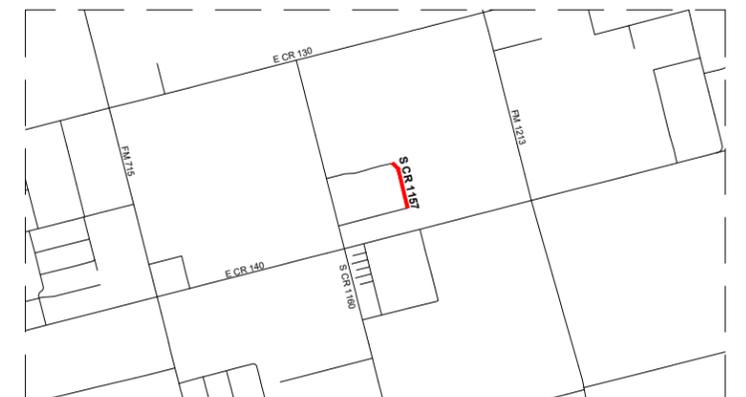

**VICINITY MAP**  
N.T.S.

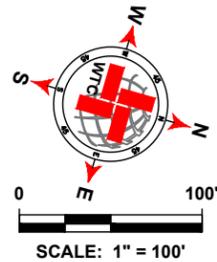

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1157 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	4 405	SY	
2	STRIPING	1 282	LF	
3	SOLID WHITE EDGE LINES	2 564	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	19.7	SY	
2	EDGE PATCHING (BY OTHERS)	65.6	SY	



**West Texas Consultants, Inc.**  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00


REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.




MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1157						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-14.0	

E COUNTY ROAD 136 -2

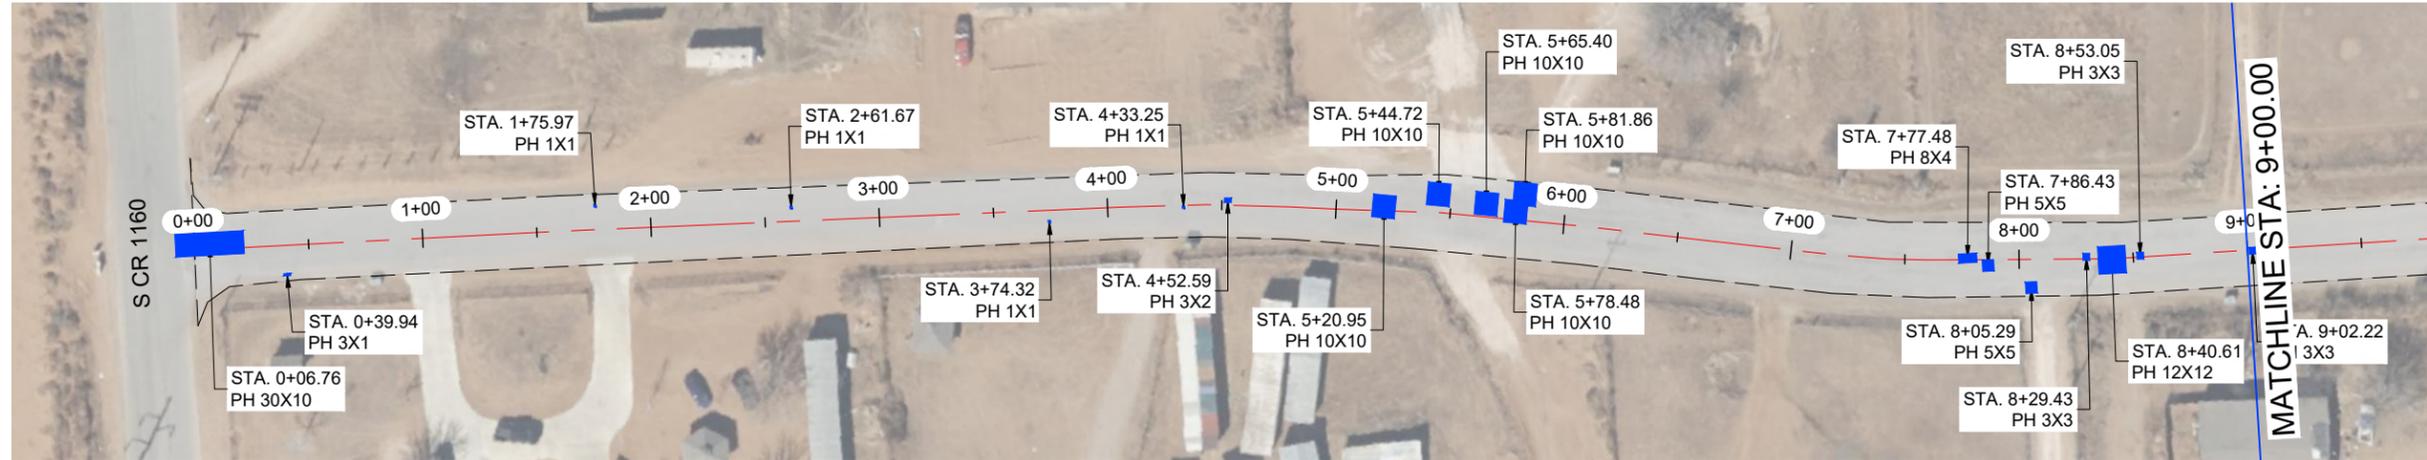

E COUNTY ROAD 136 -2

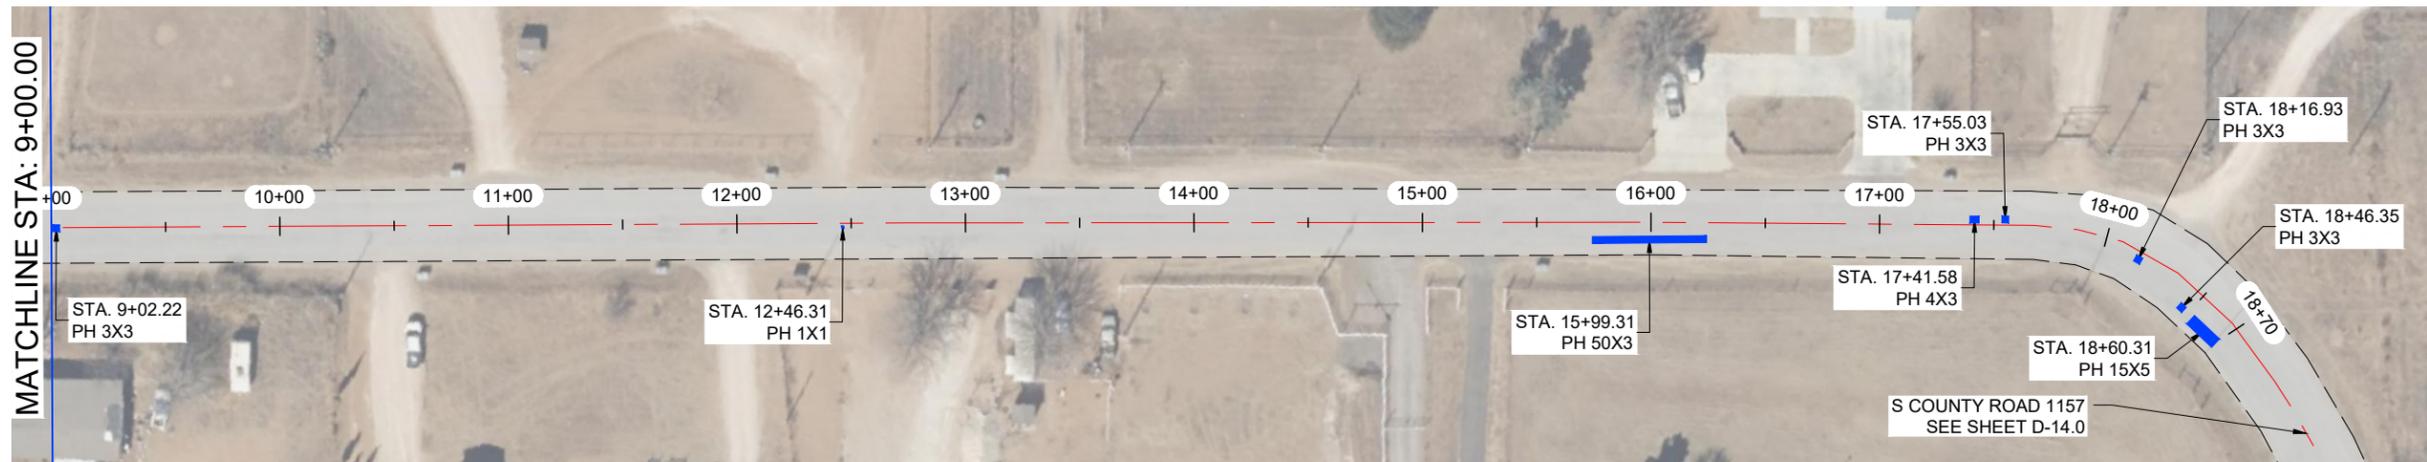

*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



VICINITY MAP  
N.T.S.

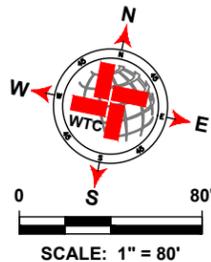

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

E COUNTY ROAD 136 -2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	6 390	SY	
2	STRIPING	1 845	LF	
3	SOLID WHITE EDGE LINES	3 690	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	147.9	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545



TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM


MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
E COUNTY ROAD 136 -2						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	D-15.0	

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND COUNTY PAVING\2024 - DESIGN\6276 - DRAWINGS\DWG\6276\MIDLAND PAVEMENT MAINTENANCE PROJECT\FIG 136 -2\2024.03.22\2024.03.22.PLM (REVISED)

E COUNTY ROAD 129





E COUNTY ROAD 129

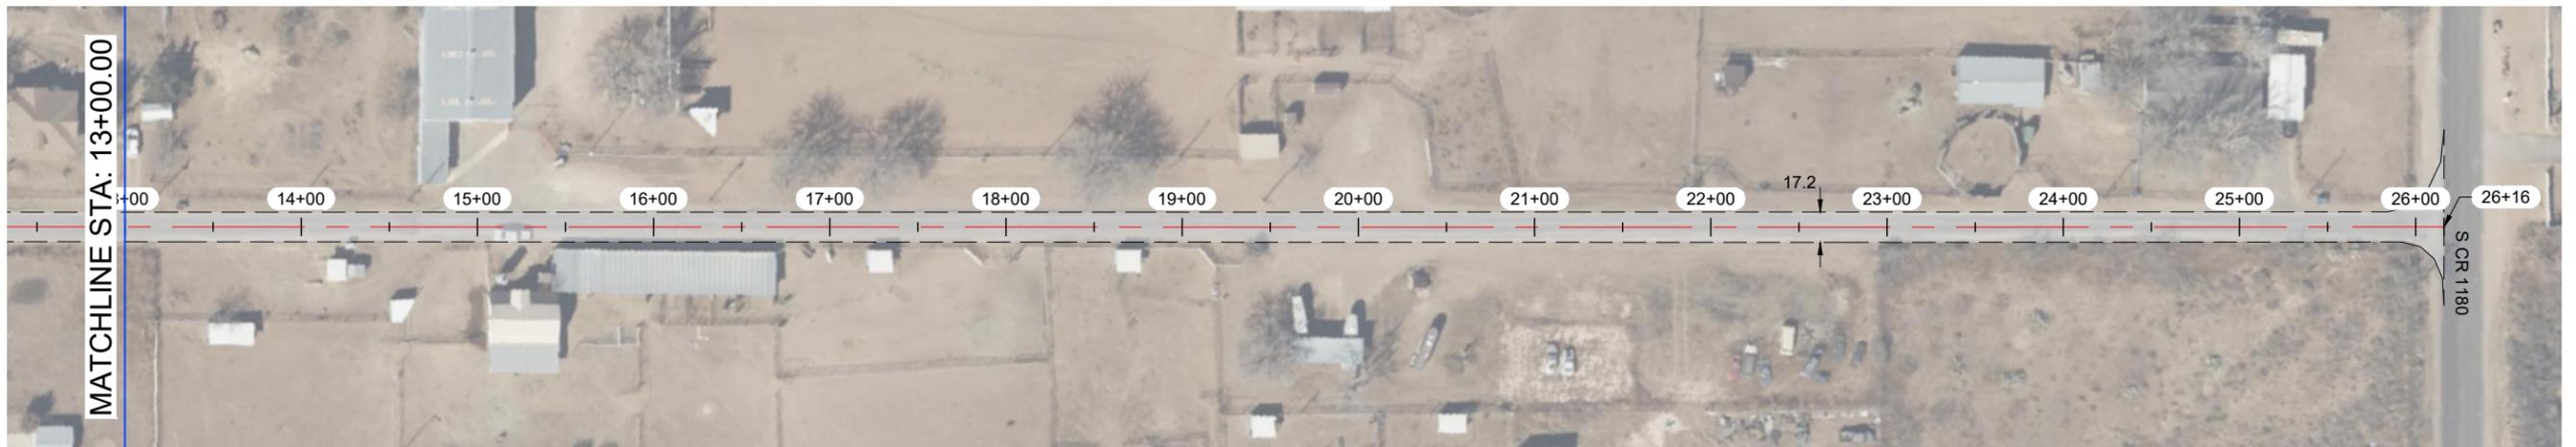

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

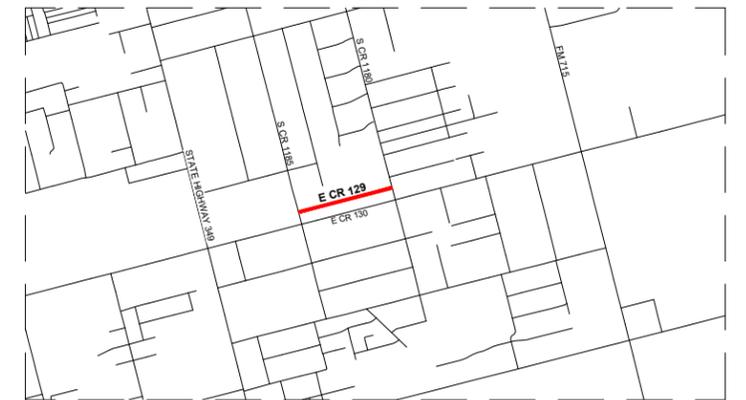

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)


E COUNTY ROAD 129 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	4 925	SY	
2	STRIPING		LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.0	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE


LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.





MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
E COUNTY ROAD 129					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-16.0



**S COUNTY ROAD 1172**

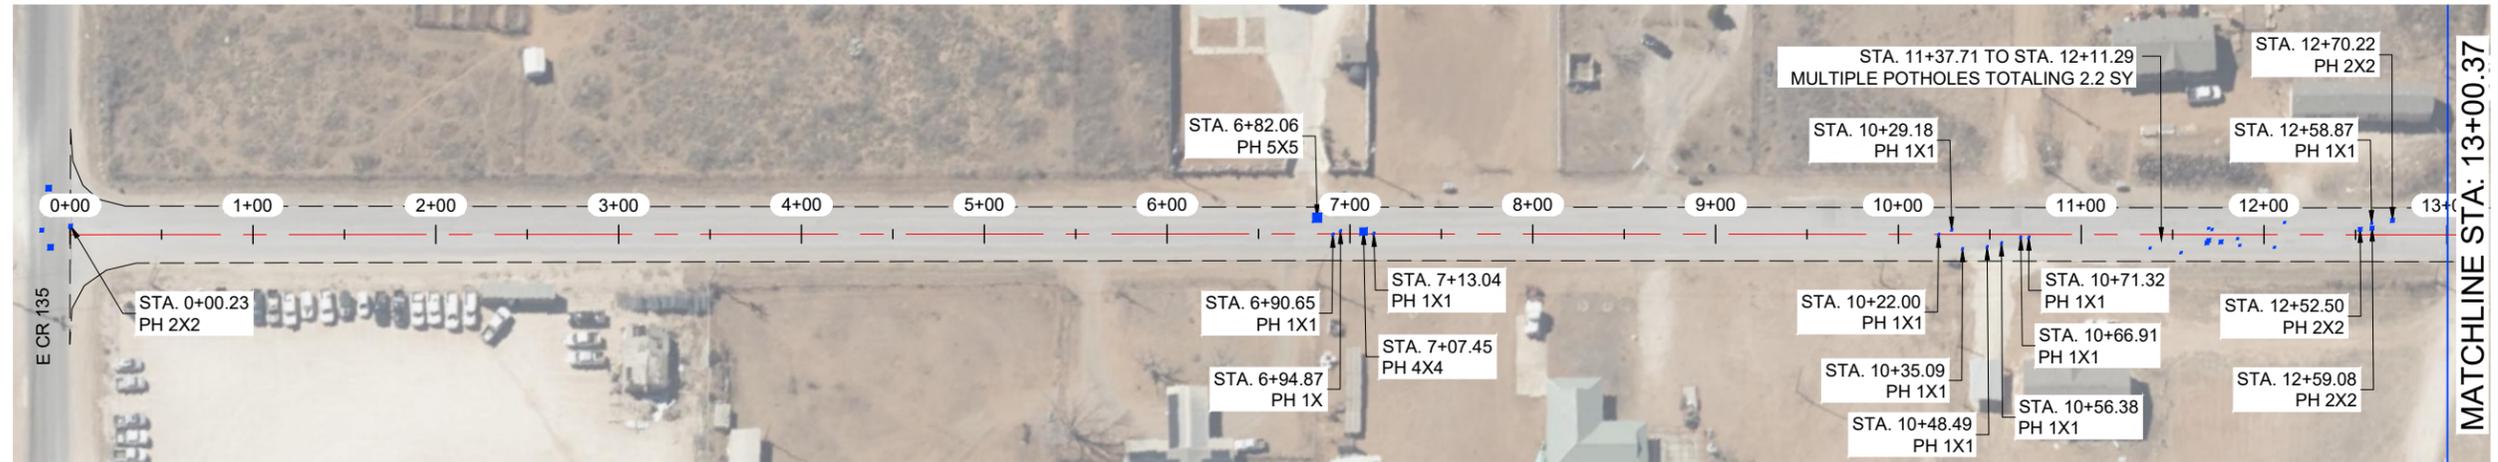


**S COUNTY ROAD 1172**

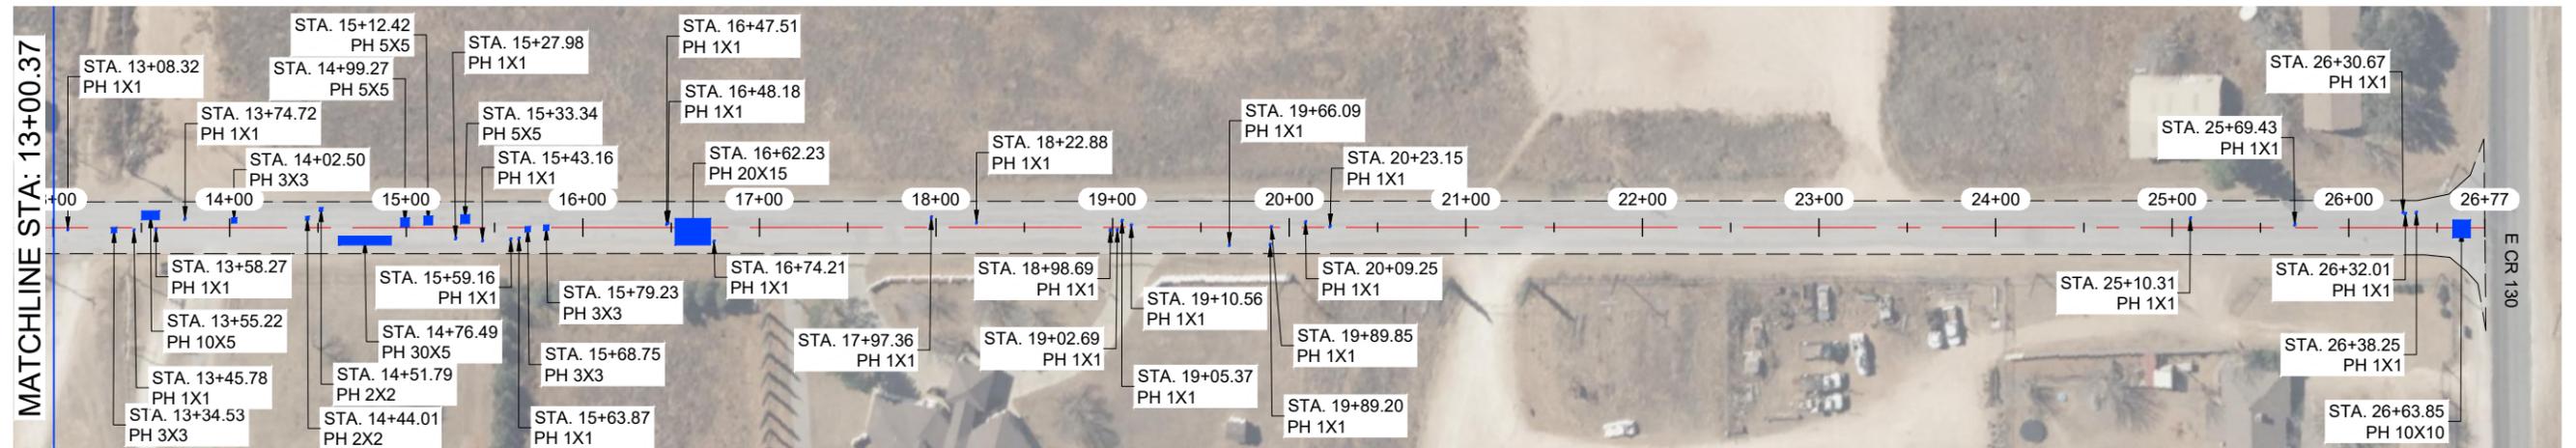


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

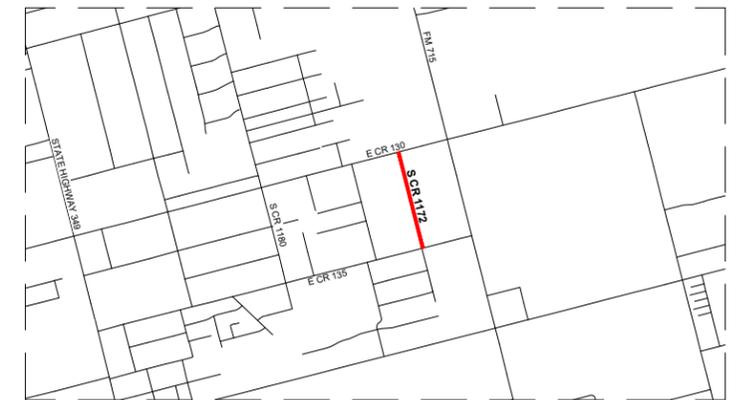

**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1172 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	8 958	SY	
2	STRIPING	2 627	LF	
3	SOLID WHITE EDGE LINES	5 254	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	95.1	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1172						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-18.0	

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\TECHNICAL\ANDREWS\2024 MIDLAND PAVEMENT MAINTENANCE PROJECT\FIG 1-172\20240318\_108\_PN.PDF  
 DRAWING: 20240318\_108\_PN.PDF  
 DATE: 3/22/24  
 TIME: 10:32:24 AM  
 USER: JCT

**E COUNTY ROAD 123**

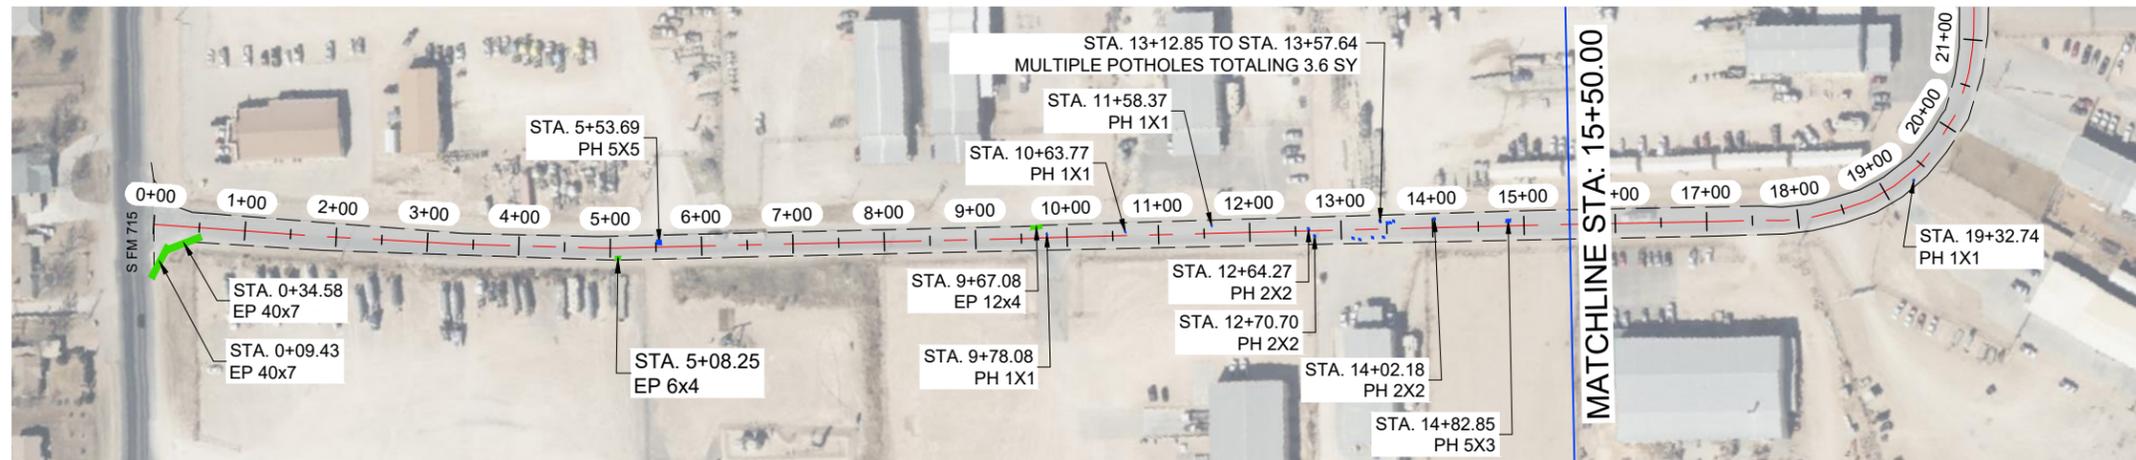

**E COUNTY ROAD 123**

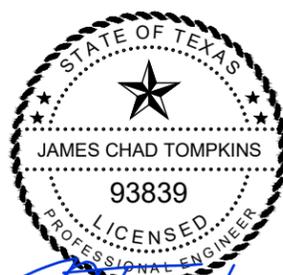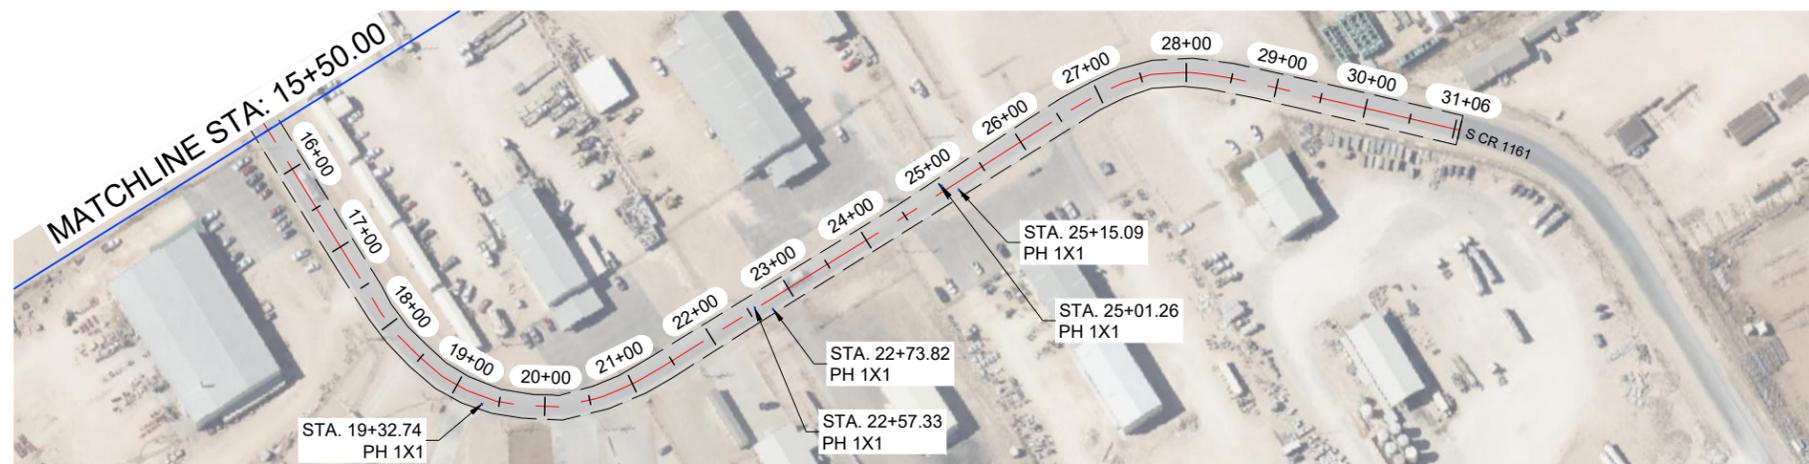

*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



**VICINITY MAP**  
N.T.S.

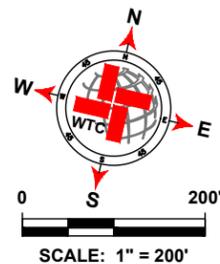

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

E COUNTY ROAD 123 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	10 251	SY	
2	STRIPING	3 081	LF	
3	SOLID WHITE EDGE LINES	6 162	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	10.2	SY	
2	EDGE PATCHING (BY OTHERS)	70.2	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
E COUNTY ROAD 123						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 200'	D-19.0	

DRAWING: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB. D:\183 E COUNTY ROAD 123\2024\3\19\2024\3\19\183 E COUNTY ROAD 123.PLOT

**S COUNTY ROAD 1180**




**S COUNTY ROAD 1180**

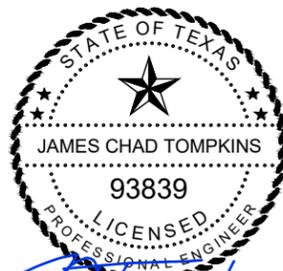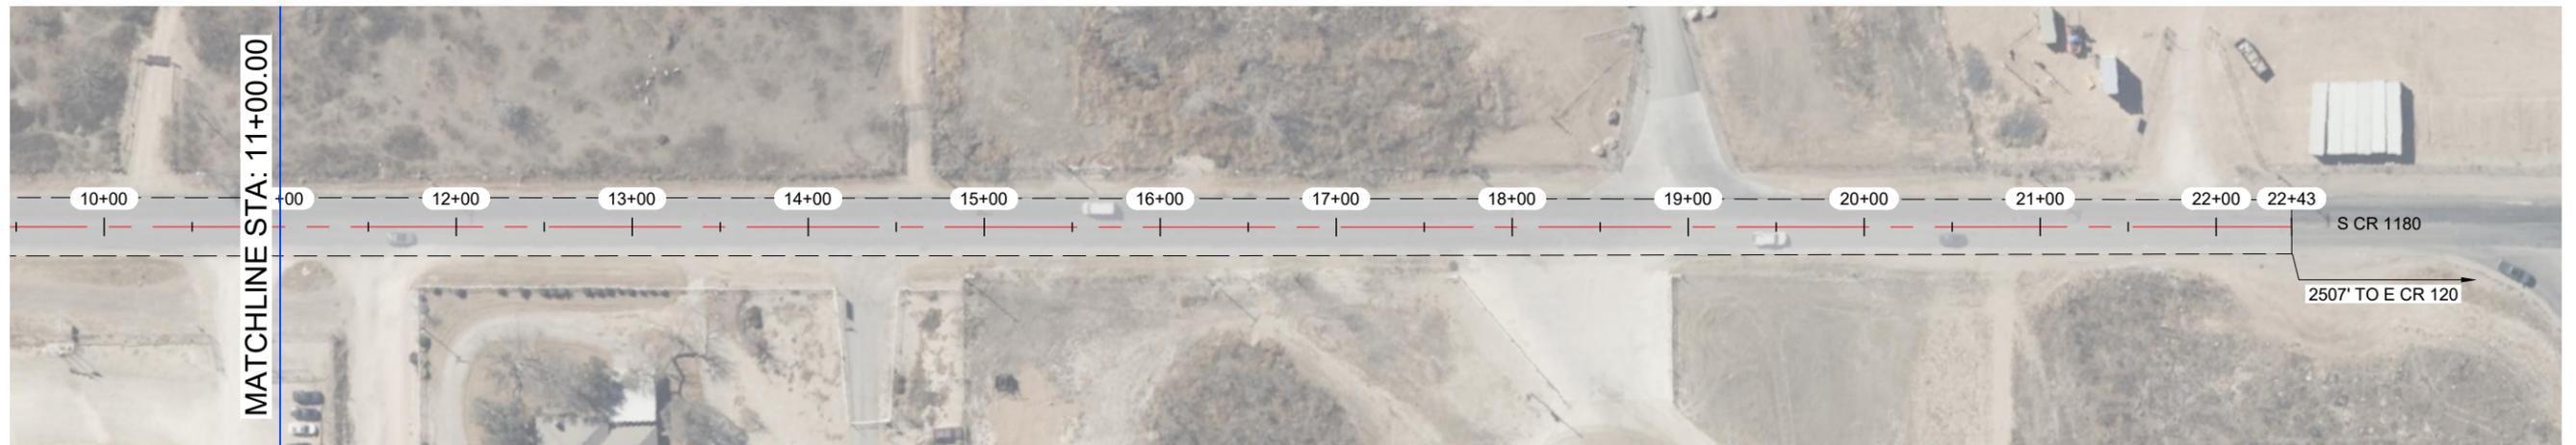


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

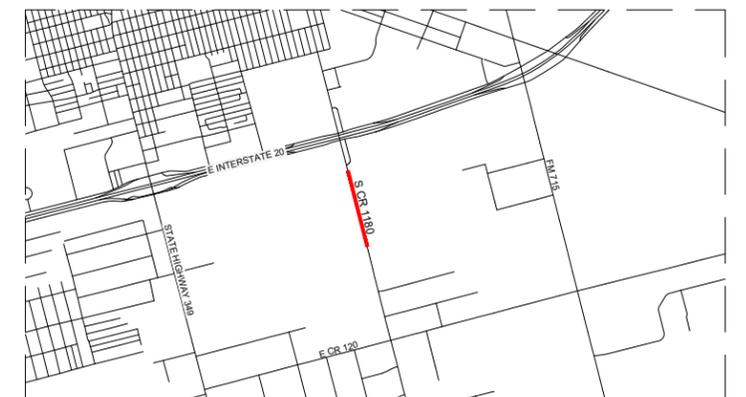

**VICINITY MAP**  
N.T.S.



SCALE: 1" = 100'

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1180 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	8 172	SY	
2	STRIPING	2 243	LF	
3	SOLID WHITE EDGE LINES	4 486	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.0	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.



CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1180						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-20.0	



N COUNTY ROAD 1148

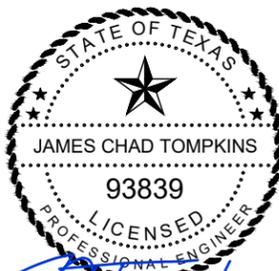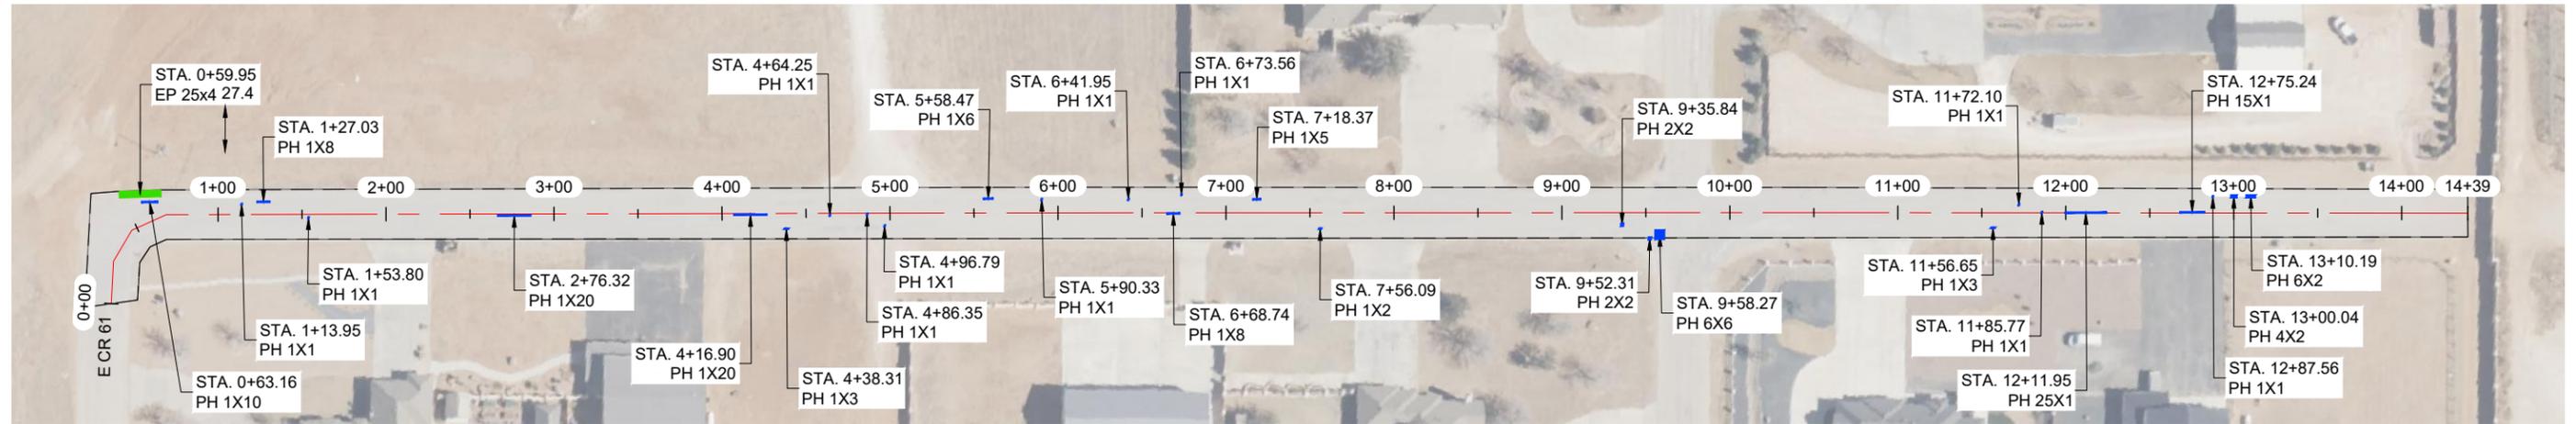

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

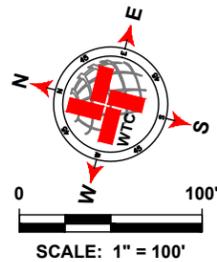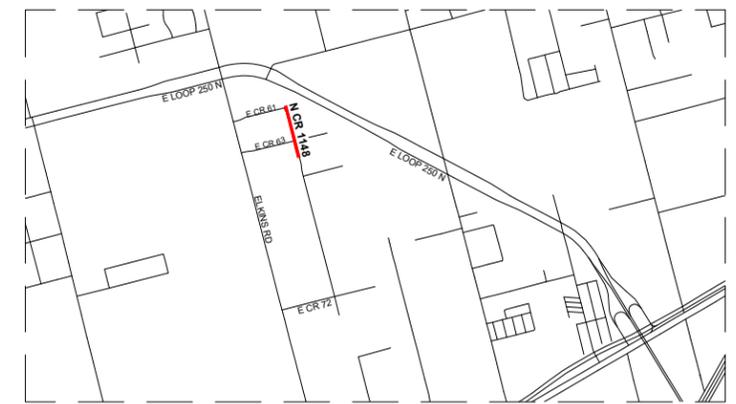

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N COUNTY ROAD 1148 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	4 809	SY	
2	STRIPING	1 414	LF	
3	SOLID WHITE EDGE LINES	2 828	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	22.2	SY	
2	EDGE PATCHING (BY OTHERS)	11.1	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS

2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

N COUNTY ROAD 1148

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-21.0


N COUNTY ROAD 1147

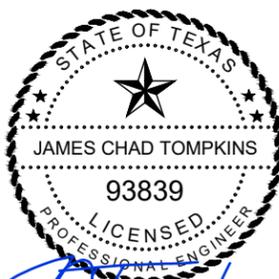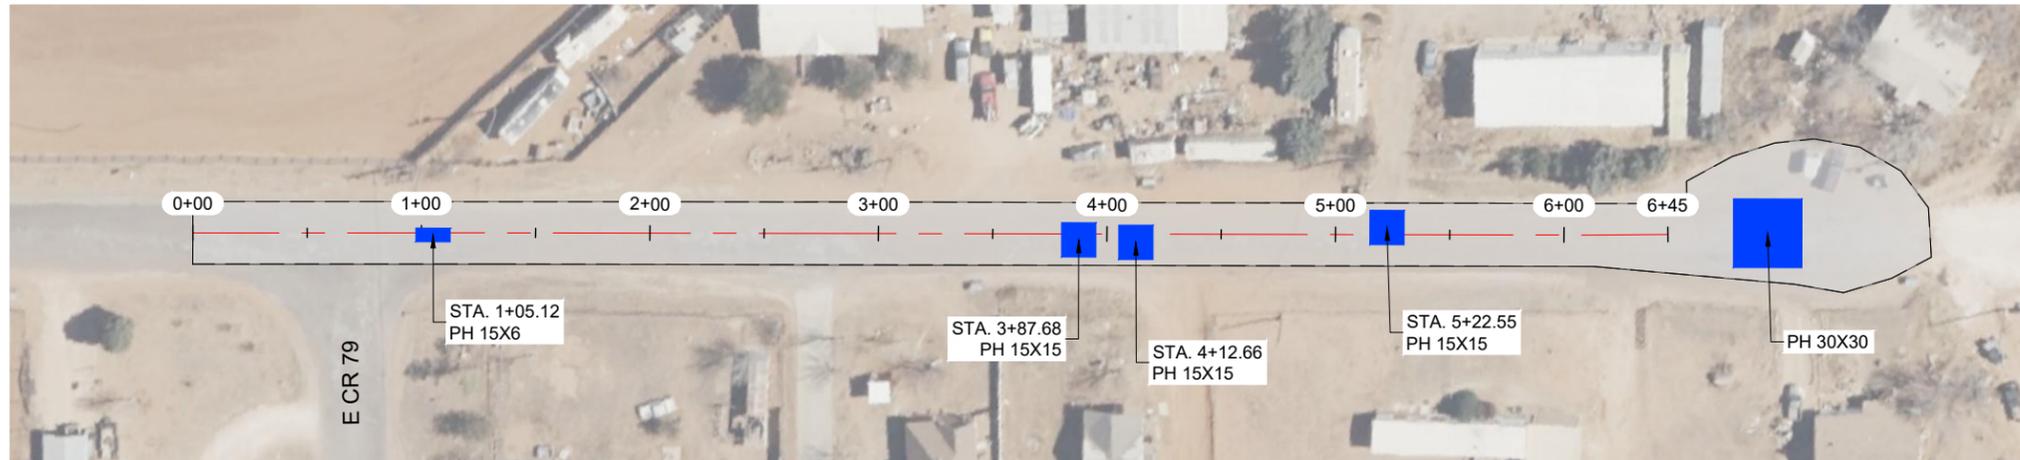


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

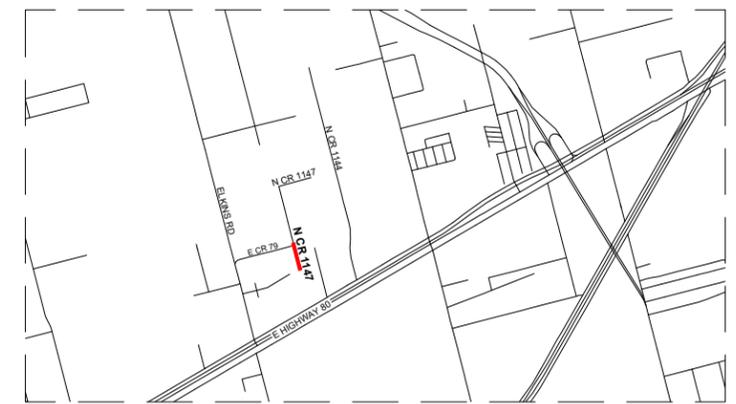

VICINITY MAP  
N.T.S.

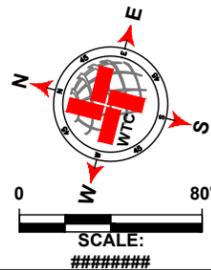

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N COUNTY ROAD 1147 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	2 634	SY	
2	STRIPING	645	LF	
3	SOLID WHITE EDGE LINES	1 290	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	185.0	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
N COUNTY ROAD 1147						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	D-22.0	

**ELKINS RD**

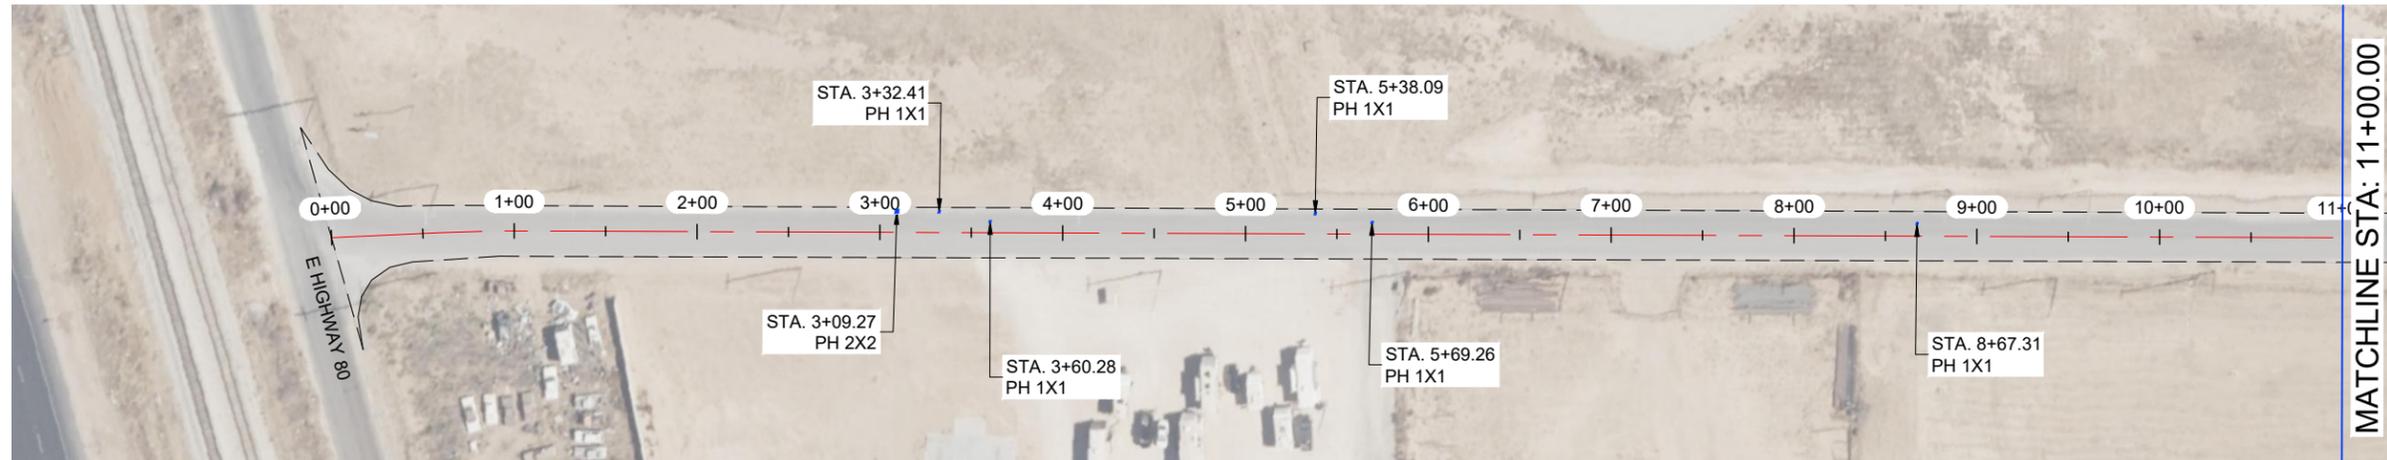


**ELKINS RD**

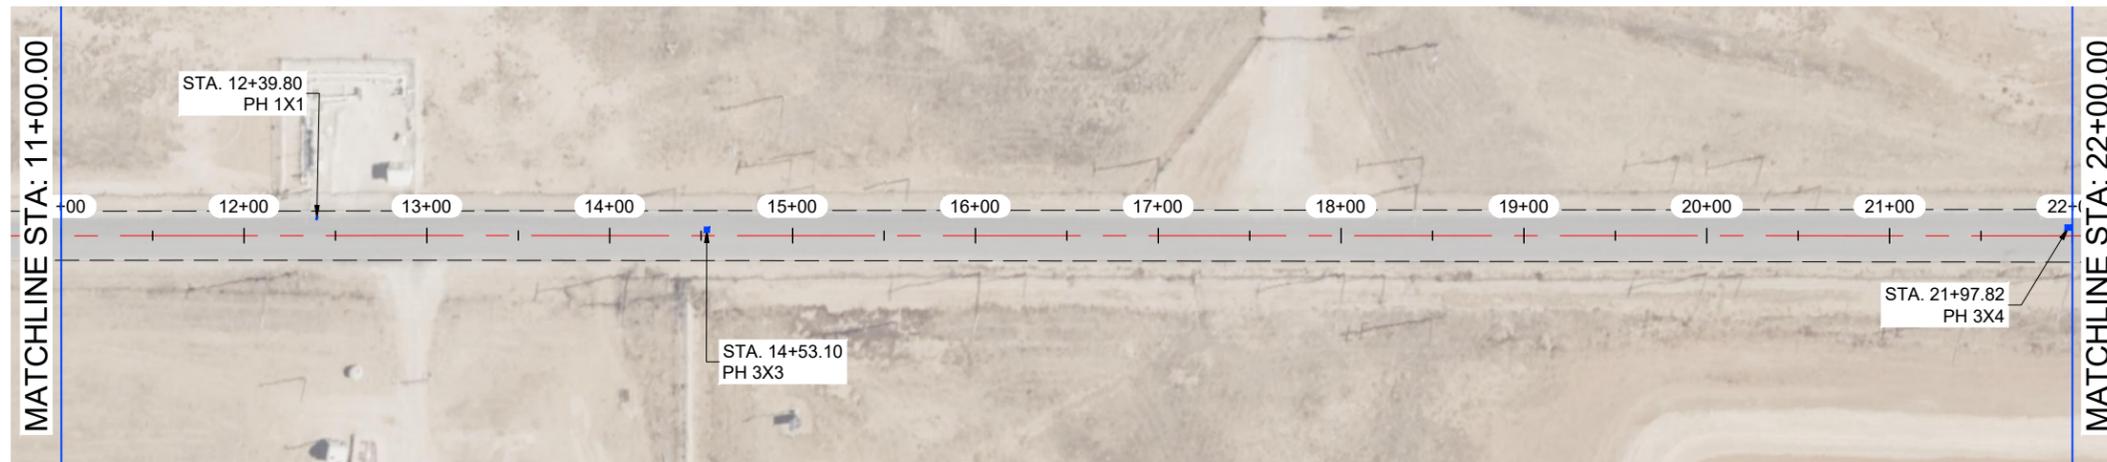


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

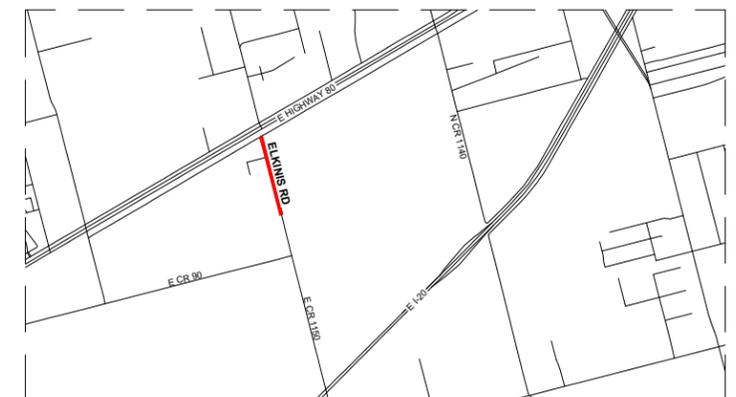

**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

ELKINS RD QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	10 478	SY	
2	STRIPING	3 327	LF	
3	SOLID WHITE EDGE LINES	6 654	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	5.4	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.



CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
ELKINS RD						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-23.0	


**ELKINS RD**

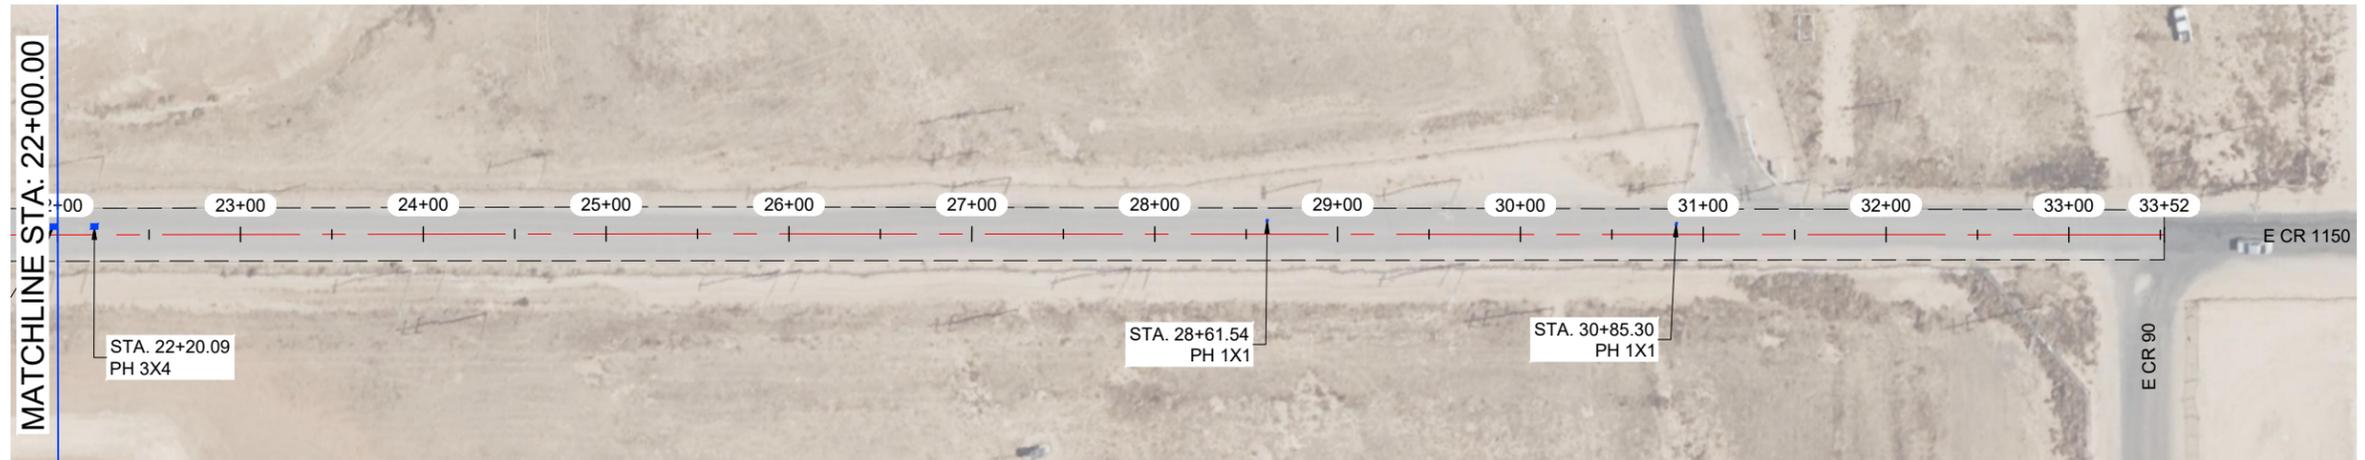


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

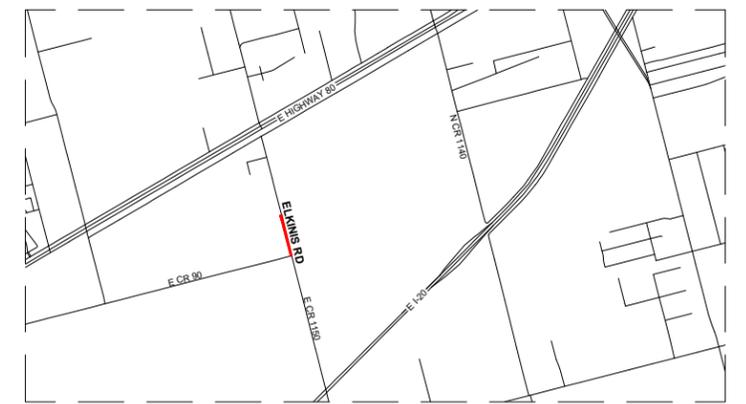

**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

ELKINS RD QUANTITIES			
ITEM #	ITEM	QTY.	UNIT
1	TWO-COURSE SEAL COAT (APPROX.)		SY
2	STRIPING		LF
3	SOLID WHITE EDGE LINES		LF
WORK BY OTHERS			
ITEM #	ITEM	QTY.	UNIT
1	POTHOLE REPAIR (BY OTHERS)		SY
2	EDGE PATCHING (BY OTHERS)		SY

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
ELKINS RD						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-23.1	

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\TEXAS\MIDLAND COUNTY PAVING\2024\MIDLAND PAVEMENT MAINTENANCE PROJECT\FIG 1\ELKINS RD\20240310.PW\FIG1.DWG  
 DRAWING: 20240310.MIDLAND PAVEMENT MAINTENANCE PROJECT FIG 1 LAYOUT TAB: D-23.1 ELKINS RD\20240310.PW\FIG1.DWG

N COUNTY ROAD 1140

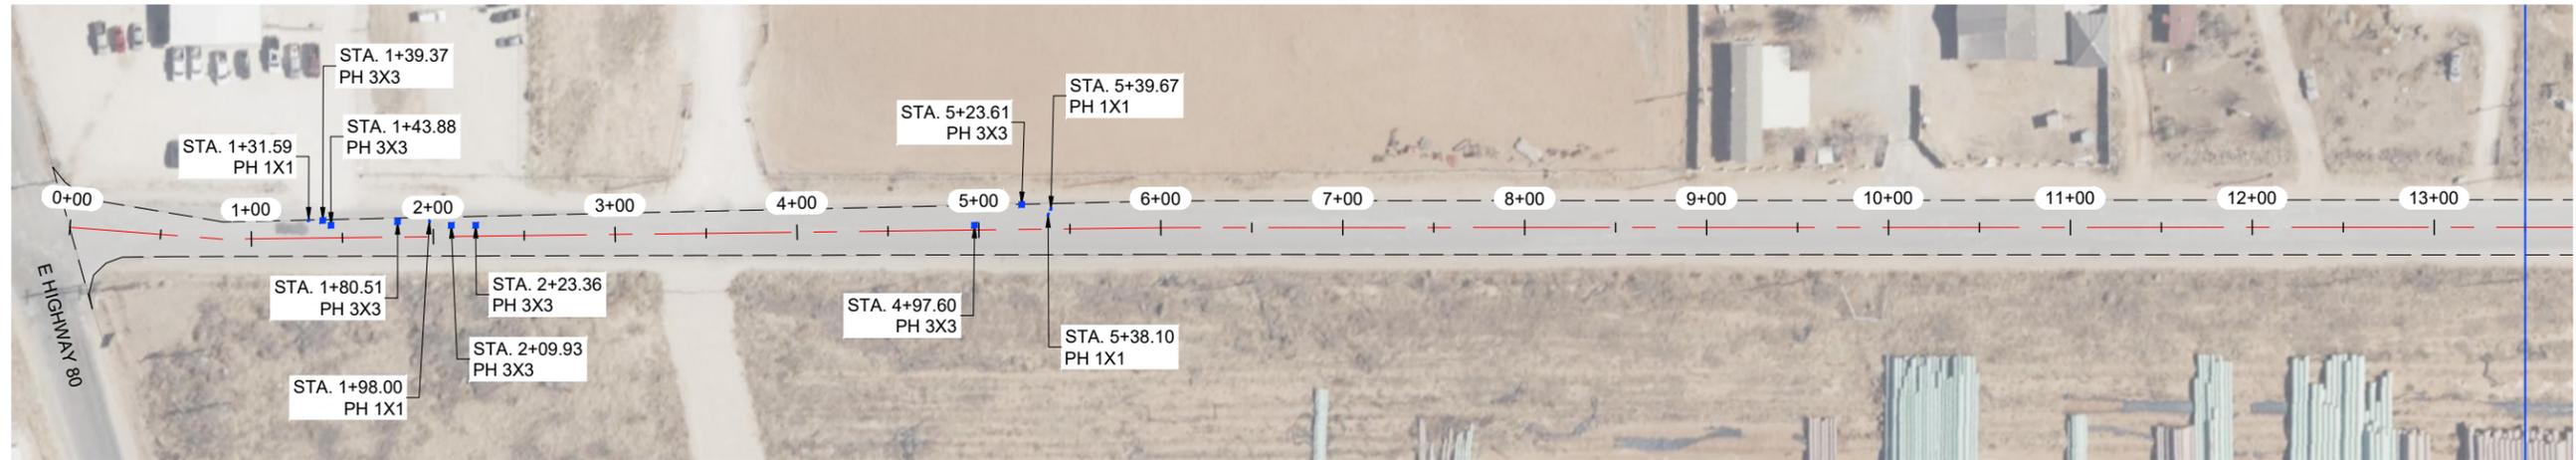

N COUNTY ROAD 1140

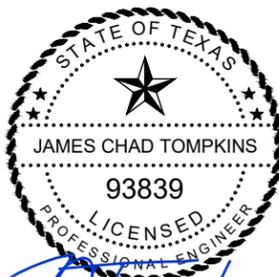
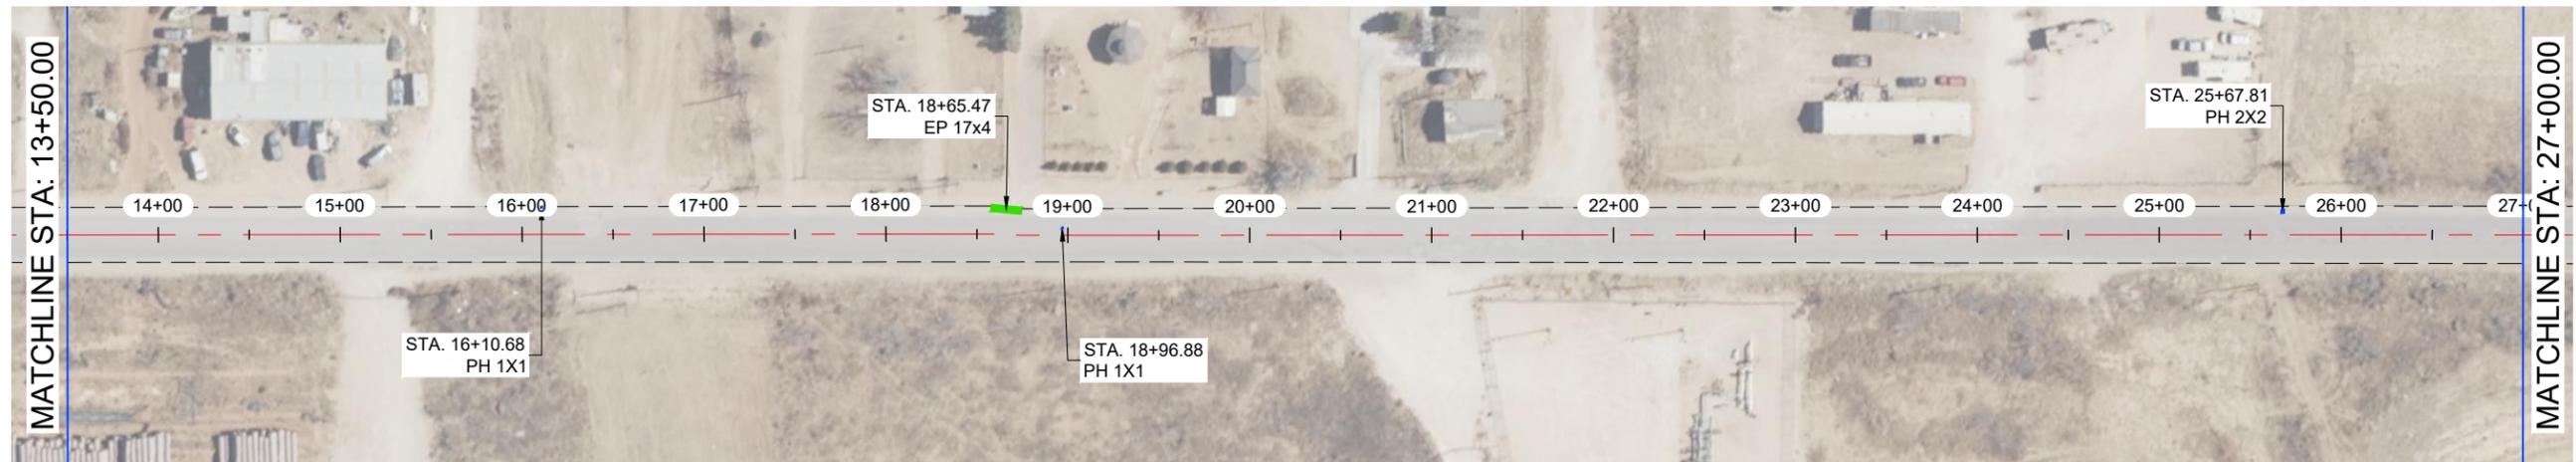


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

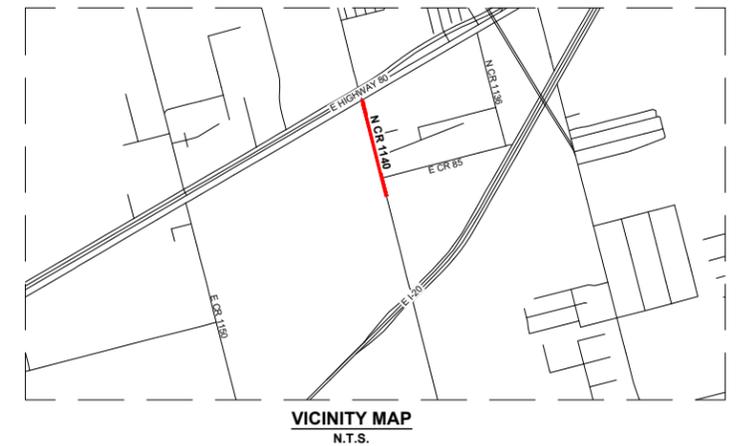

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N COUNTY ROAD 1140 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	17 396	SY	
2	STRIPING	5 306	LF	
3	SOLID WHITE EDGE LINES	10 612	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	34.7	SY	
2	EDGE PATCHING (BY OTHERS)	66.9	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
N COUNTY ROAD 1140						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-24.0	

N COUNTY ROAD 1140

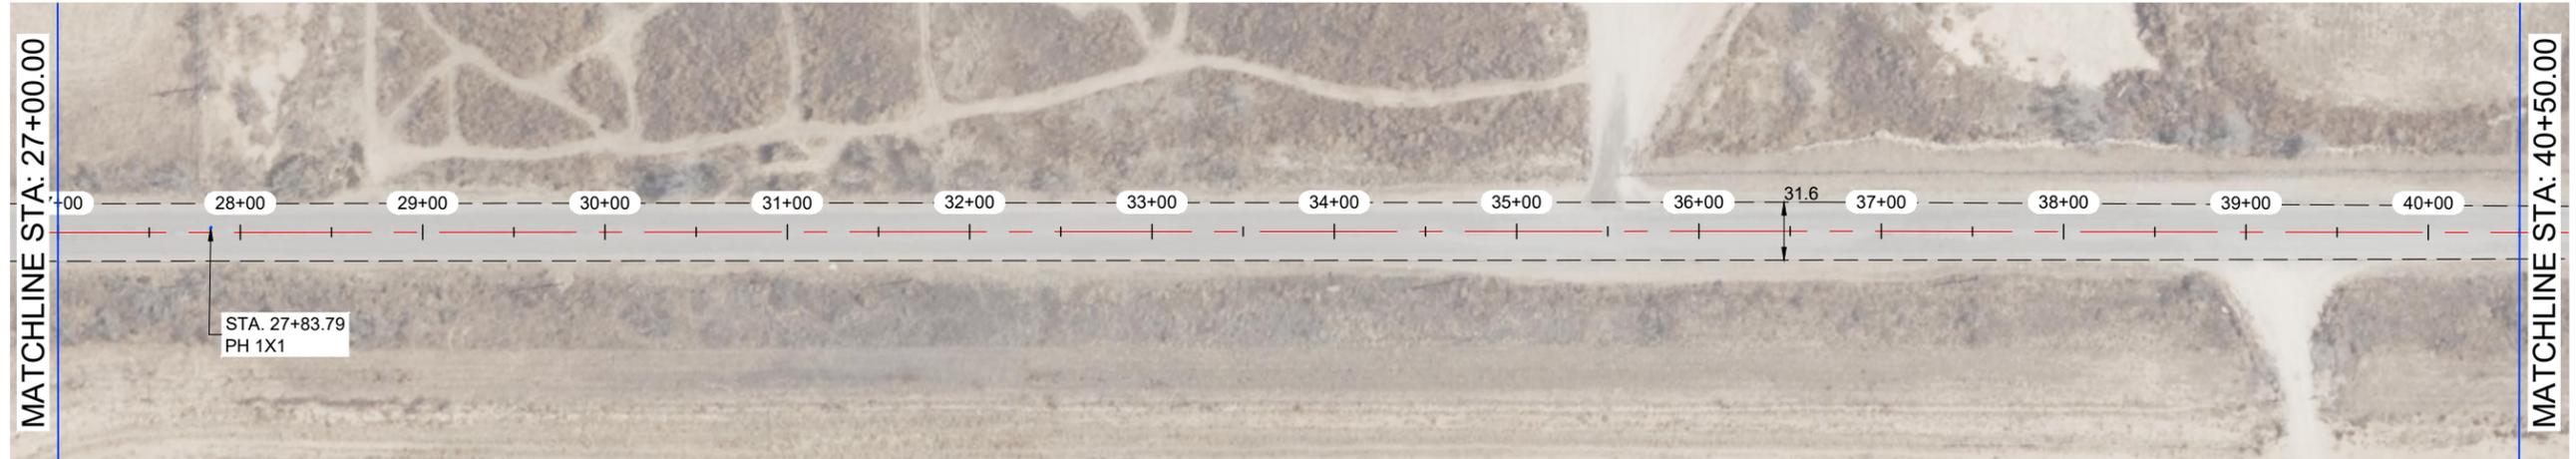

N COUNTY ROAD 1140


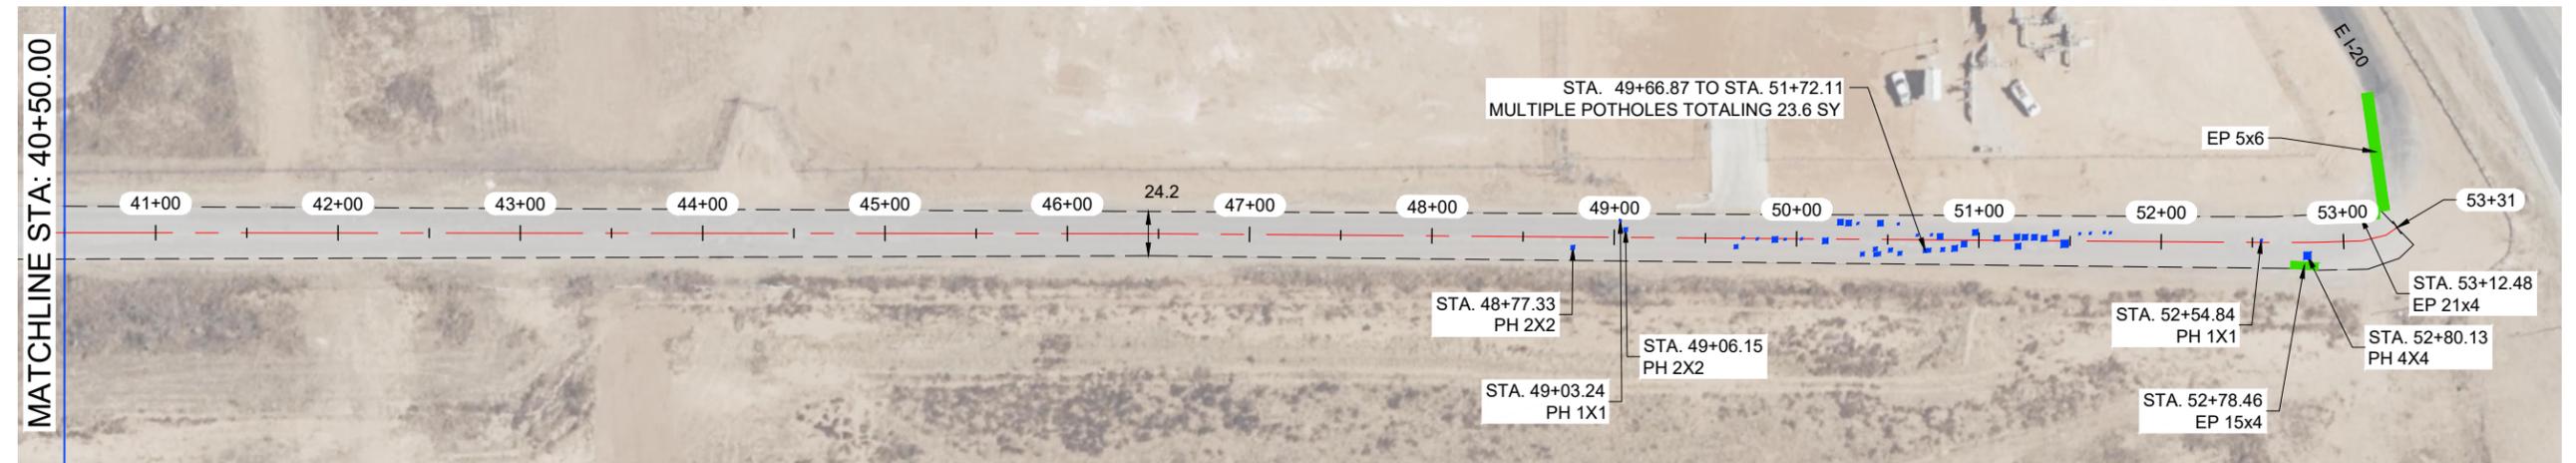


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

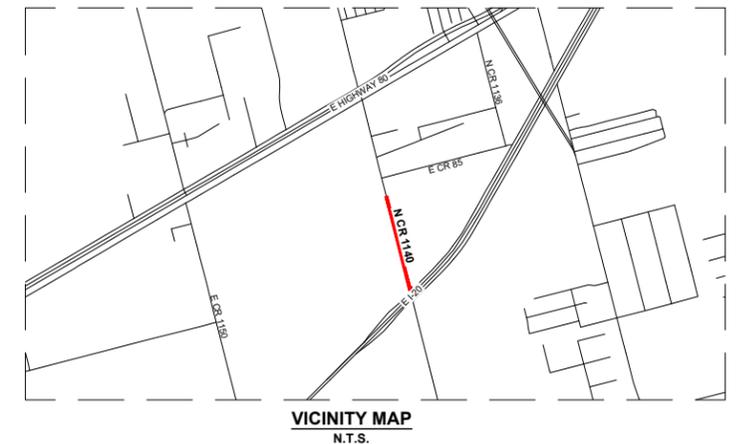

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N COUNTY ROAD 1140 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)		SY	
2	STRIPING		LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)		SY	
2	EDGE PATCHING (BY OTHERS)		SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.




Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545





TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
N COUNTY ROAD 1140					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-24.1

N COUNTY ROAD 1135 -2

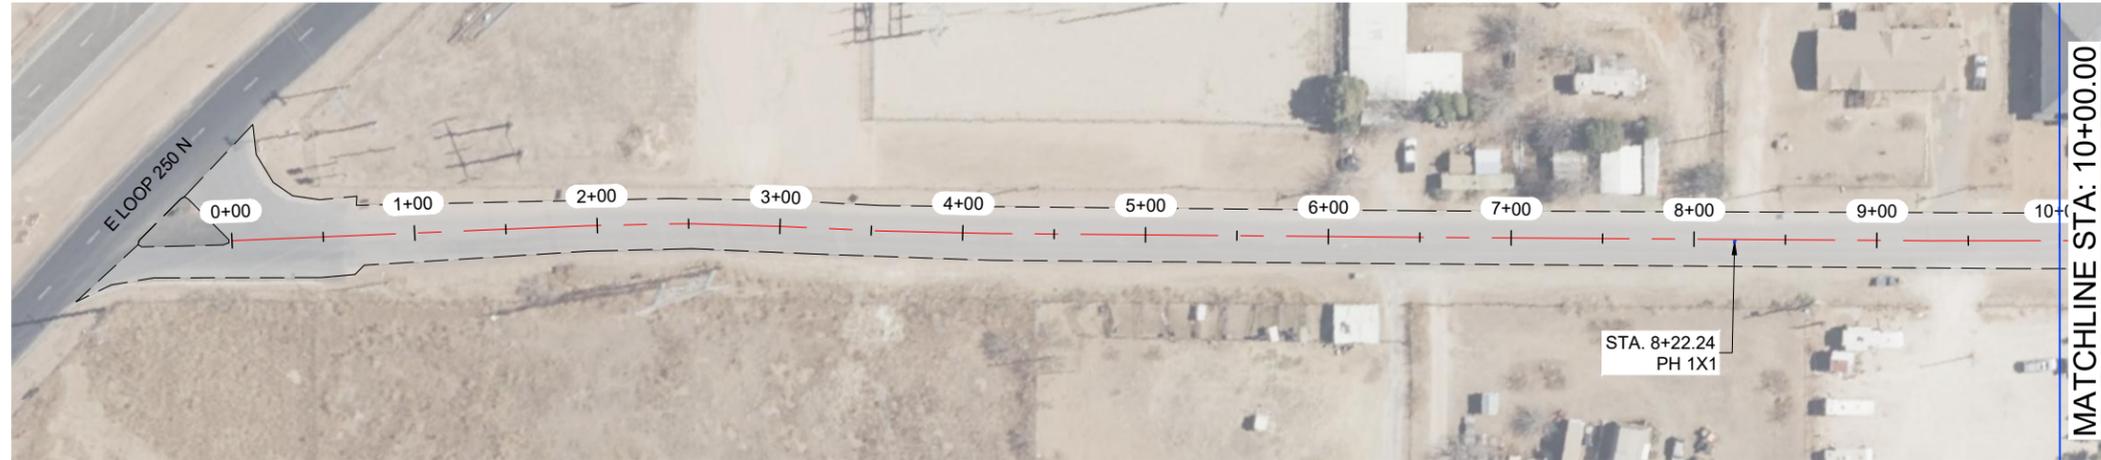

N COUNTY ROAD 1135 -2

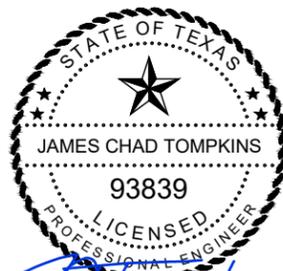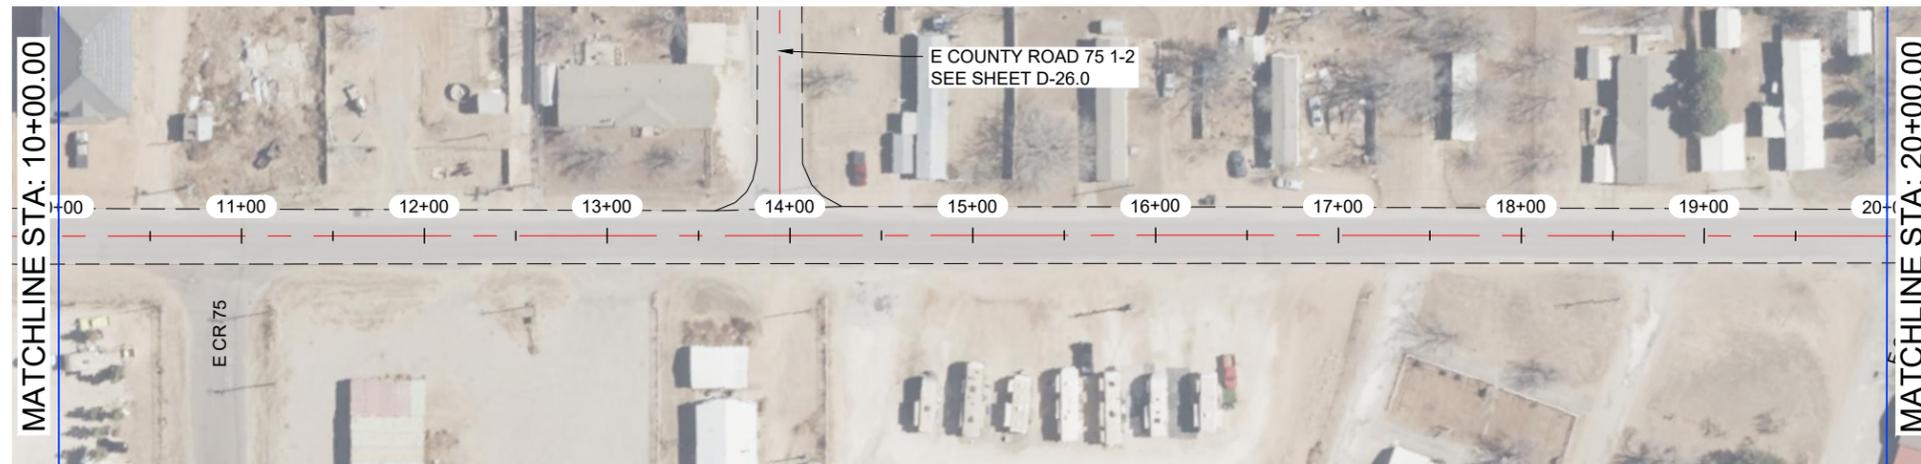


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

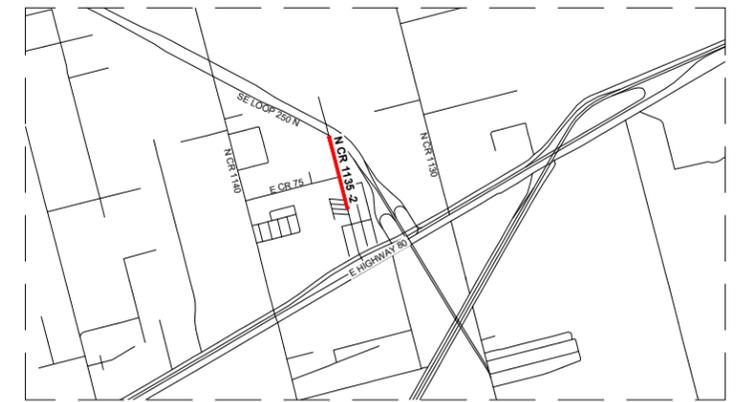

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N COUNTY ROAD 1135 -2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	11 165	SY	
2	STRIPING	3 204	LF	
3	SOLID WHITE EDGE LINES	6 408	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.1	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS

2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

N COUNTY ROAD 1135 -2

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-25.0

PLAT X: PROJECT ENGINEERING & SURVEYING TEXAS MIDLAND COUNTY PAVING 2024 - DESIGN 06/26 - DRAWINGS DIVISION 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB: D-25.0 N COUNTY ROAD 1135 -2 3/22/2024 3:10 PM IRM680

N COUNTY ROAD 1135 -2




*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

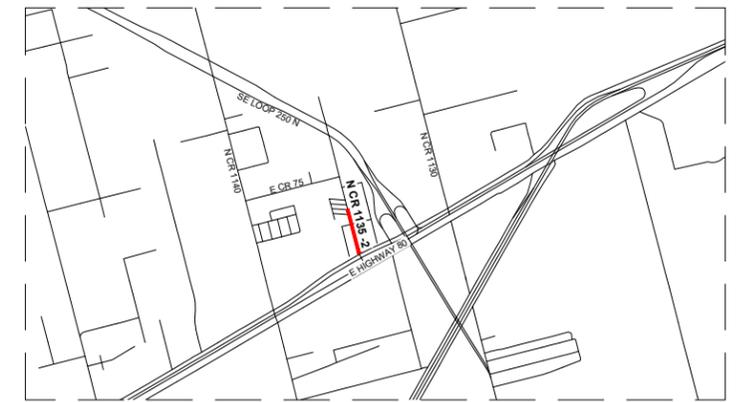

VICINITY MAP  
N.T.S.

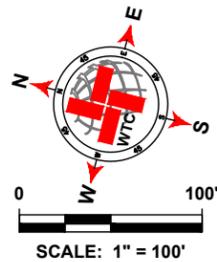

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N COUNTY ROAD 1135 -2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)		SY	
2	STRIPING		LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)		SY	
2	EDGE PATCHING (BY OTHERS)		SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS


2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

N COUNTY ROAD 1135 -2

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-25.1

PLAT X: PROJECT ENGINEERING & SURVEYING TEXAS MIDLAND COUNTY PAVING 2024 - DESIGN 06/26 - DRAWINGS DIVISION 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB D-25.1 N COUNTY ROAD 1135 -2 3/22/2024 3:30 PM RROMERO


**E COUNTY ROAD 75 1/2**

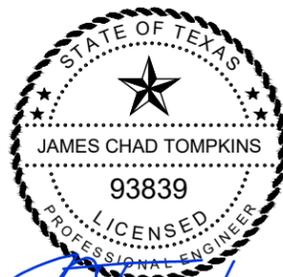


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

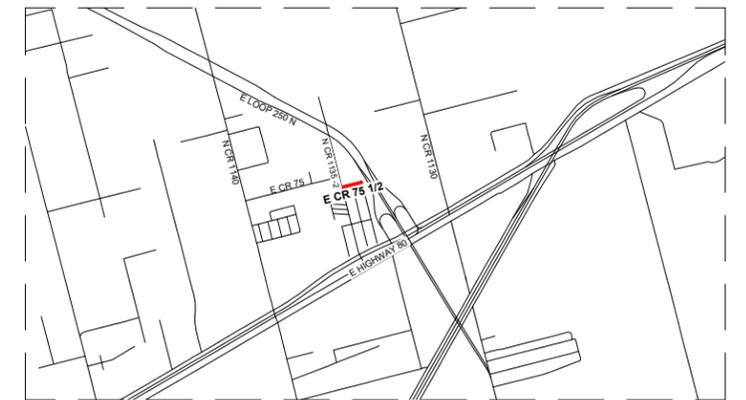

**VICINITY MAP**  
N.T.S.

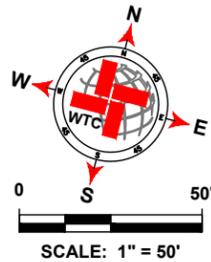

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

E COUNTY ROAD 75 1-2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	1 435	SY	
2	STRIPING	516	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.0	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

**MIDLAND COUNTY, TEXAS**

2024 MIDLAND PAVEMENT MAINTENANCE PROJECT




E COUNTY ROAD 75 1/2

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 50'	D-26.0

N COUNTY ROAD 1134




N COUNTY ROAD 1134

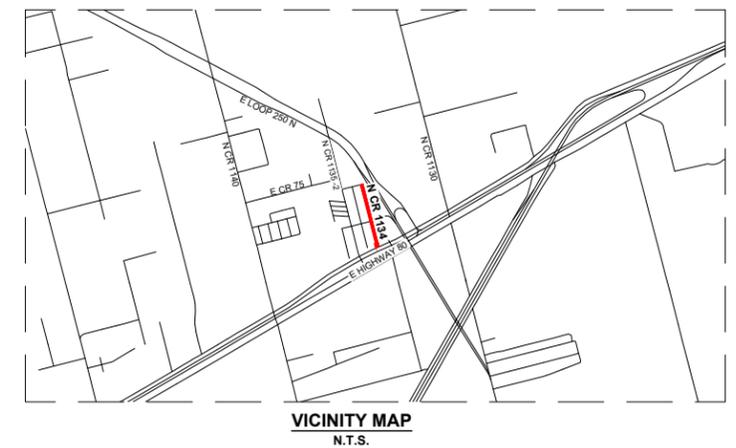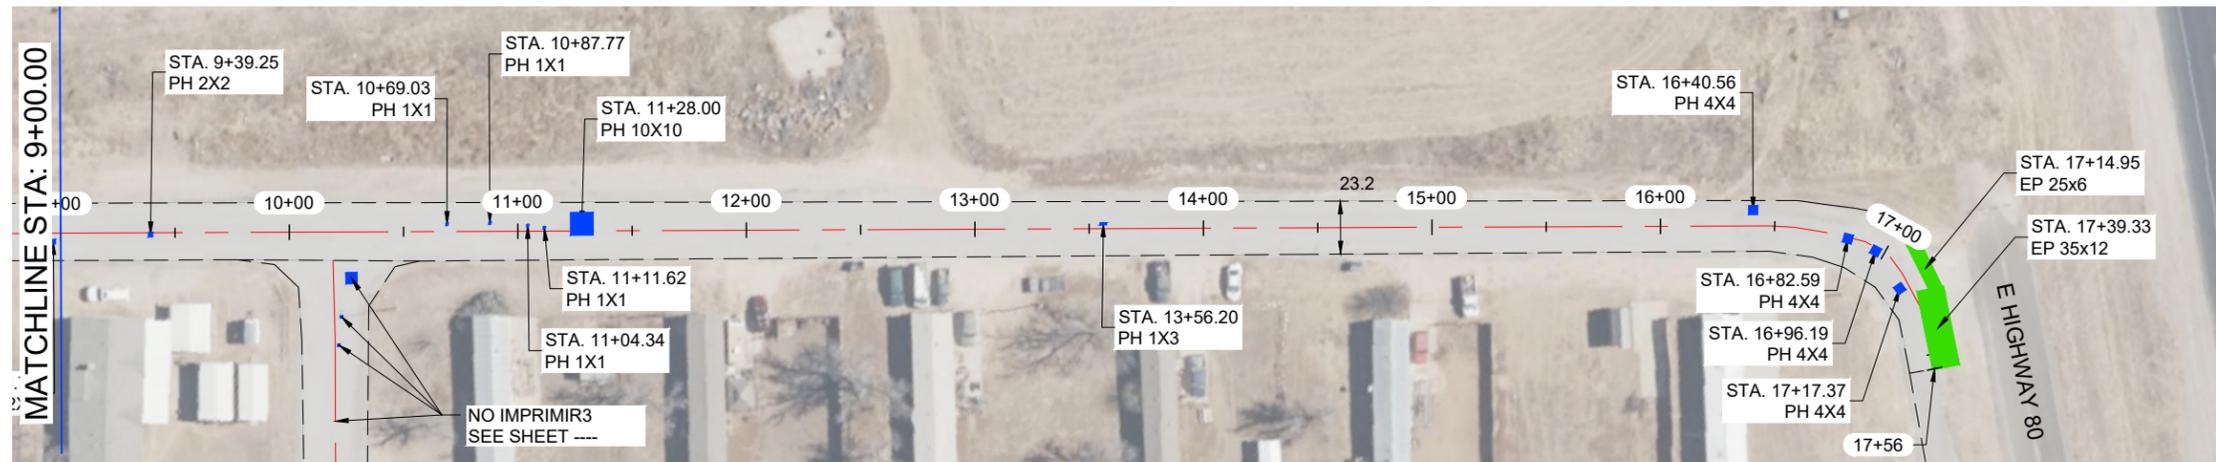

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N COUNTY ROAD 1134 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	4 593	SY	
2	STRIPING	1 756	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	20.3	SY	
2	EDGE PATCHING (BY OTHERS)	63.3	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.



CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOPI CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
N COUNTY ROAD 1134						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	D-27.0	

NO IMPRIMIR3

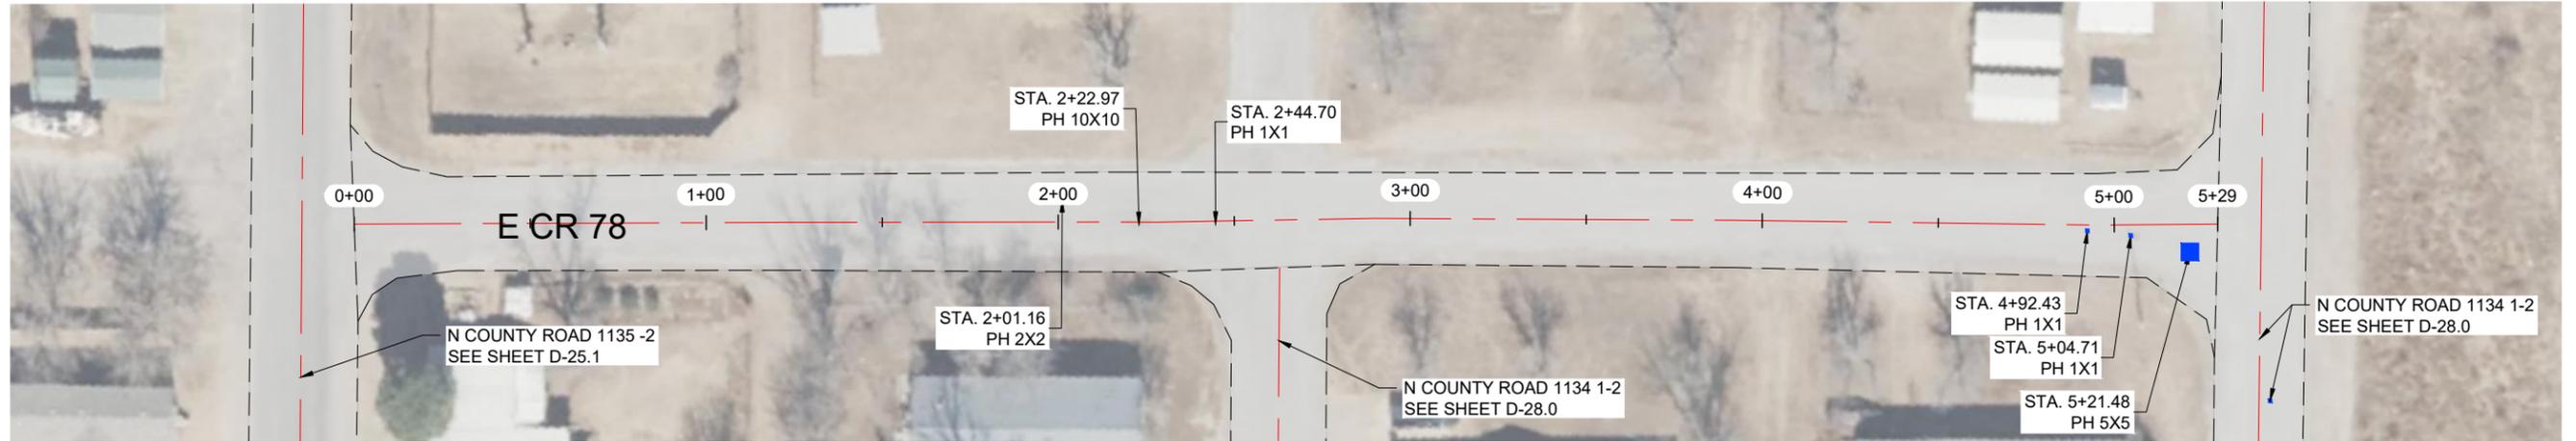


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

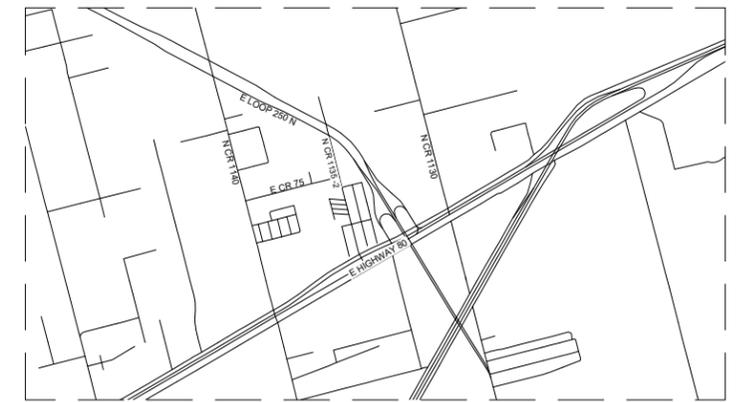

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

NO IMPRIMIR3 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	1 661	SY	
2	STRIPING	479	LF	
3	SOLID WHITE EDGE LINES	00	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	14.7	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE



LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
NO IMPRIMIR3						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 50'	----	

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND COUNTY PAVING 2024 - DESIGN\6276 - DRAWINGS\DWG\6276\MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB: NO IMPRIMIR3.DWG 3/22/2024 1:11 PM RCM/MSD

N COUNTY ROAD 1134 1/2

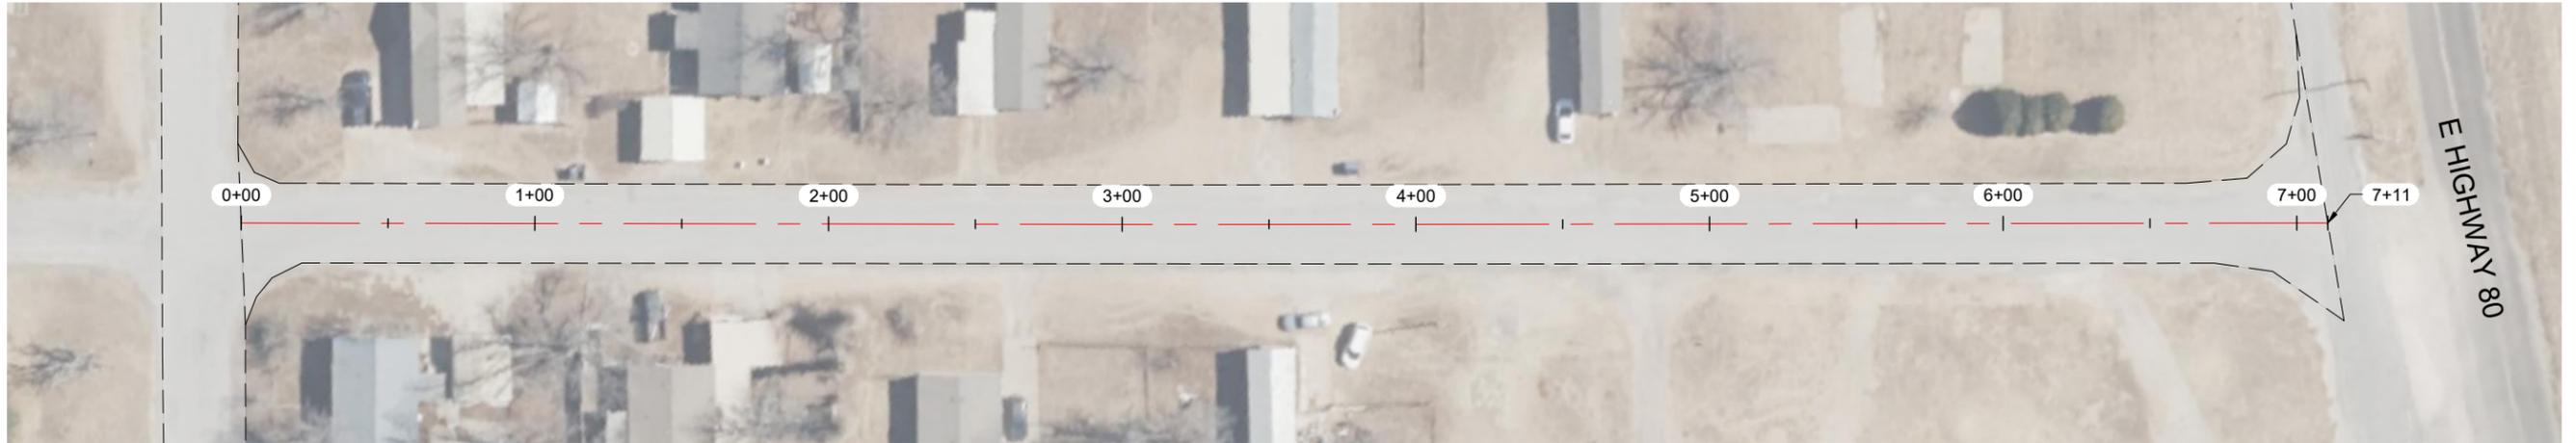


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

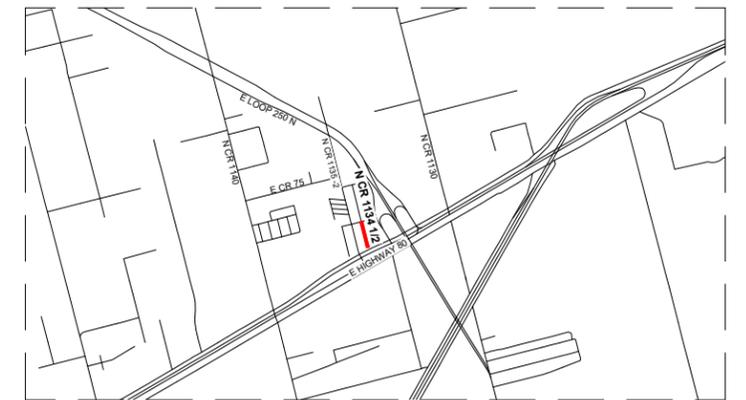

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N COUNTY ROAD 1134 1-2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	2 225	SY	
2	STRIPING	661	LF	
3	SOLID WHITE EDGE LINES	1 321	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.0	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
N COUNTY ROAD 1134 1/2						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 60'	D-28.0	

PLAT X: PROJECT ENGINEERING & SURVEYING TEXAS MIDLAND COUNTY PAVING 2024 - DESIGN 06/26 - DRAWINGS DIVISION 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB: D-28.0 N COUNTY ROAD 1134 1-2 2024.03.11 PM ROMERO

N COUNTY ROAD 1130 -2

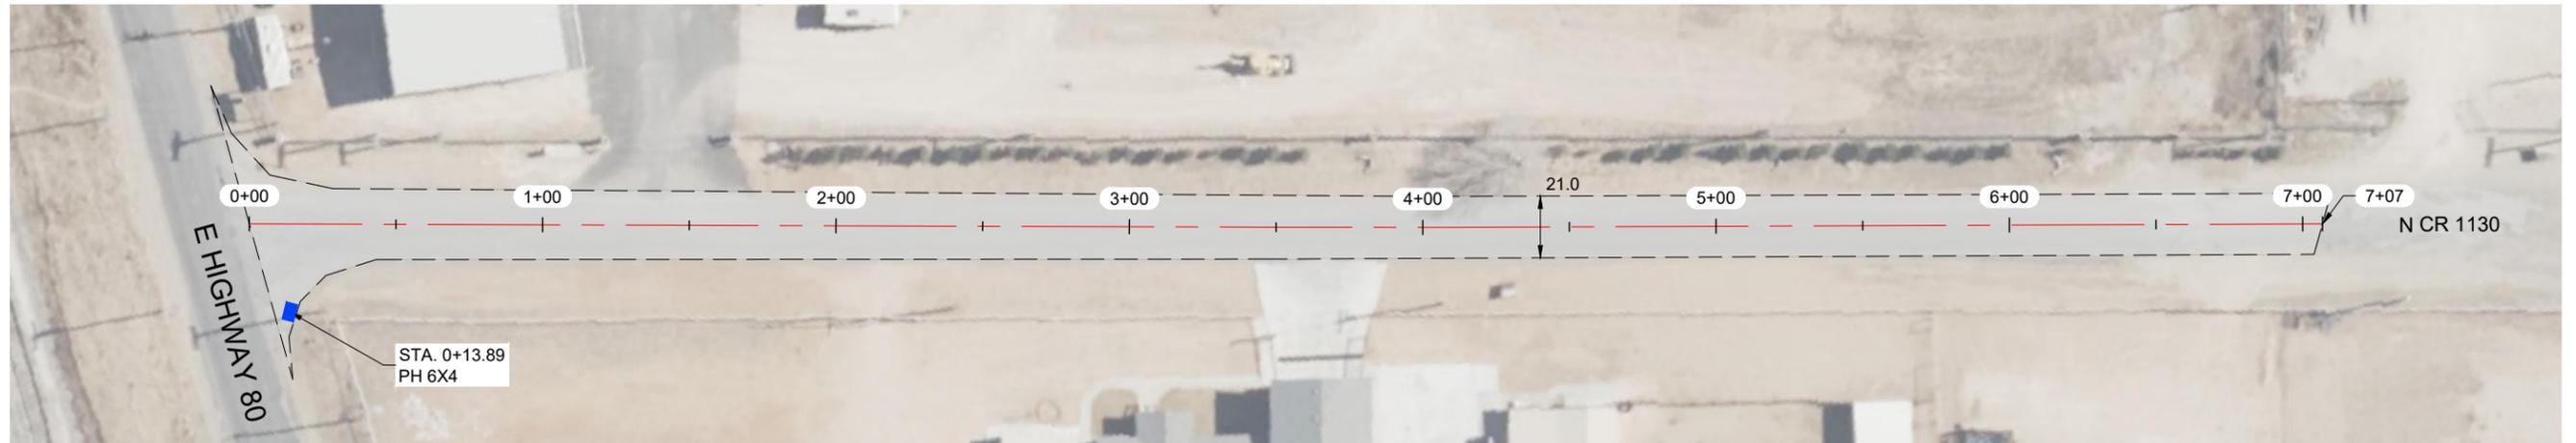


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

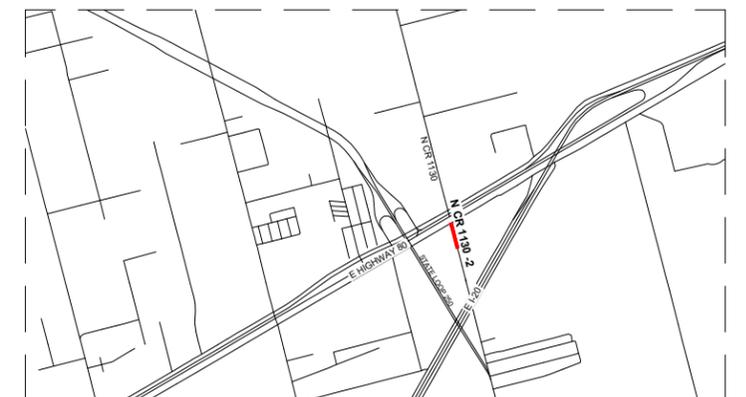

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N COUNTY ROAD 1130 -2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	1 793	SY	
2	STRIPING	682	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	2.7	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.




Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545  
TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM




MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
N COUNTY ROAD 1130 -2						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 60'	D-29.0	

PLAT X: PROJECT ENGINEERING & SURVEYING TEXAS AND MIDLAND COUNTY PAVING 2024 - DESIGN 06/26 - DRAWINGS 05/06/2024 AND MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB: D:\2024\N COUNTY ROAD 1130 -2\20240324 11 PLR\06290

N COUNTY ROAD 1135-1

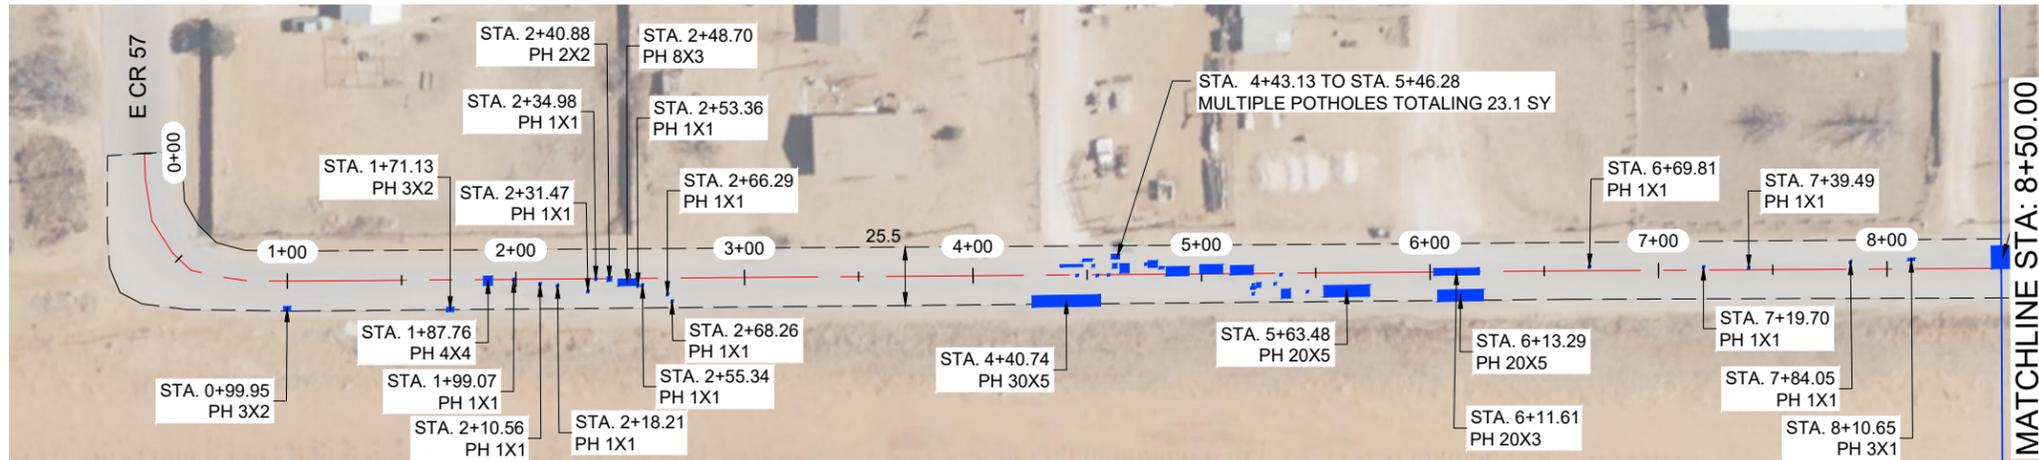


N COUNTY ROAD 1135-1

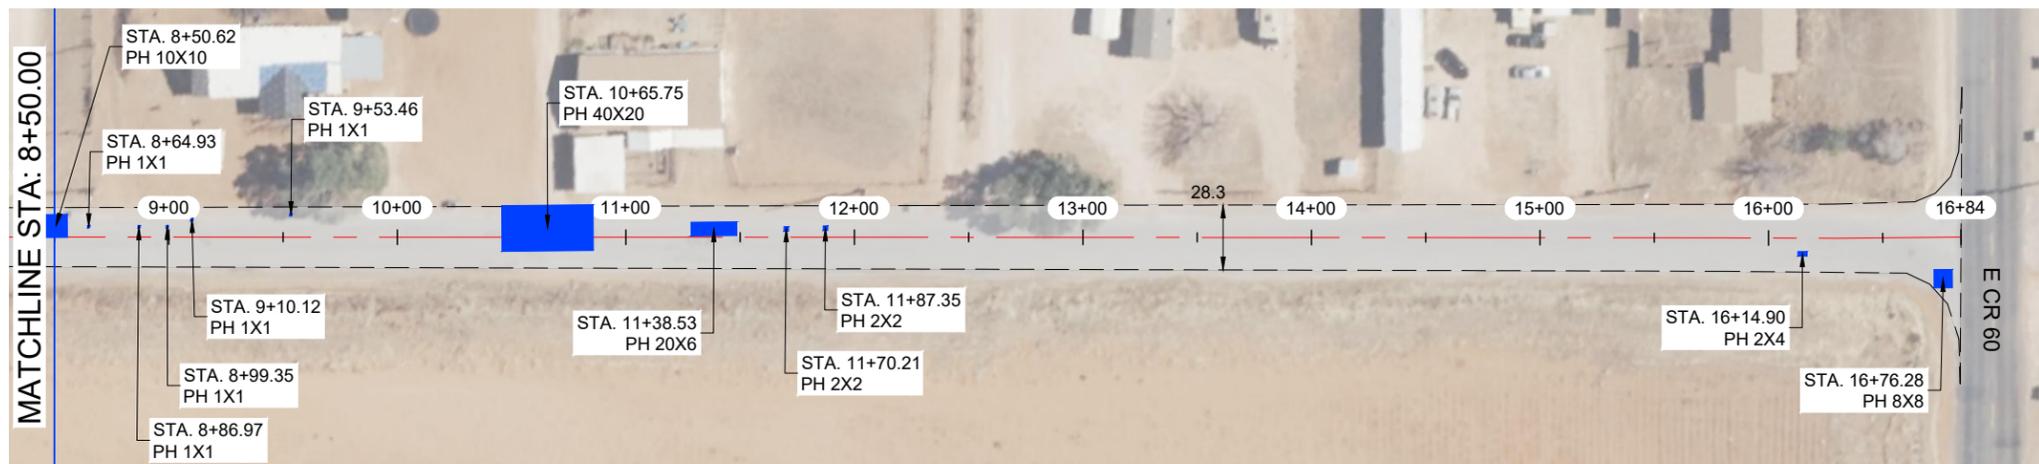


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

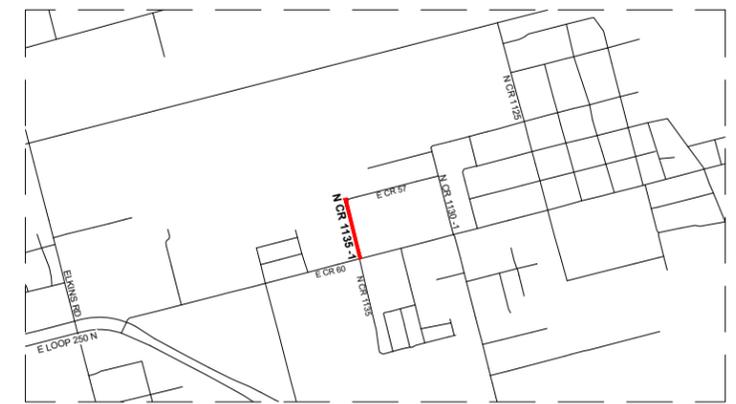

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N COUNTY ROAD 1135-1 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5 135	SY	
2	STRIPING	1 659	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	199.4	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
N COUNTY ROAD 1135-1						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	D-30.0	

N COUNTY ROAD 1133

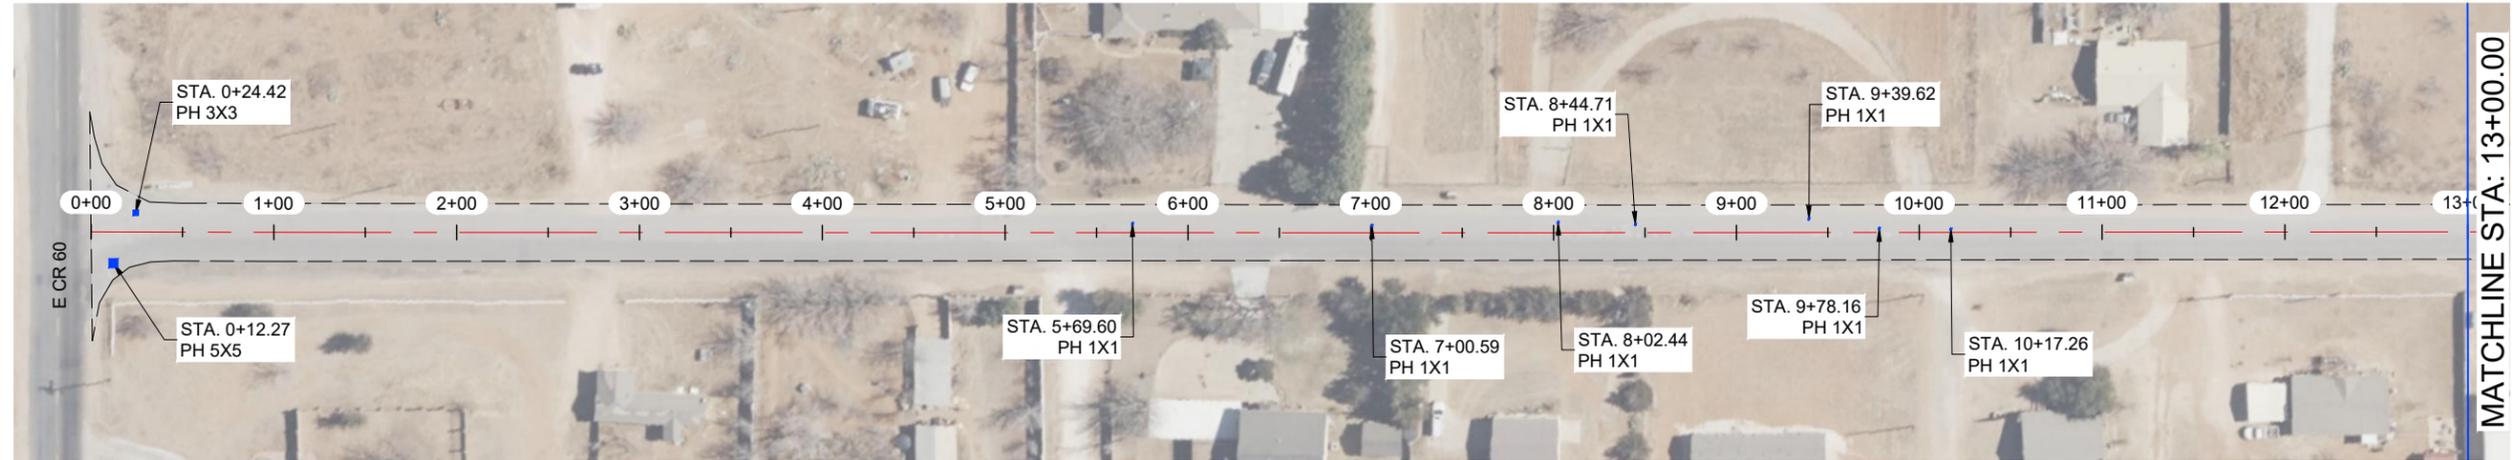


N COUNTY ROAD 1133

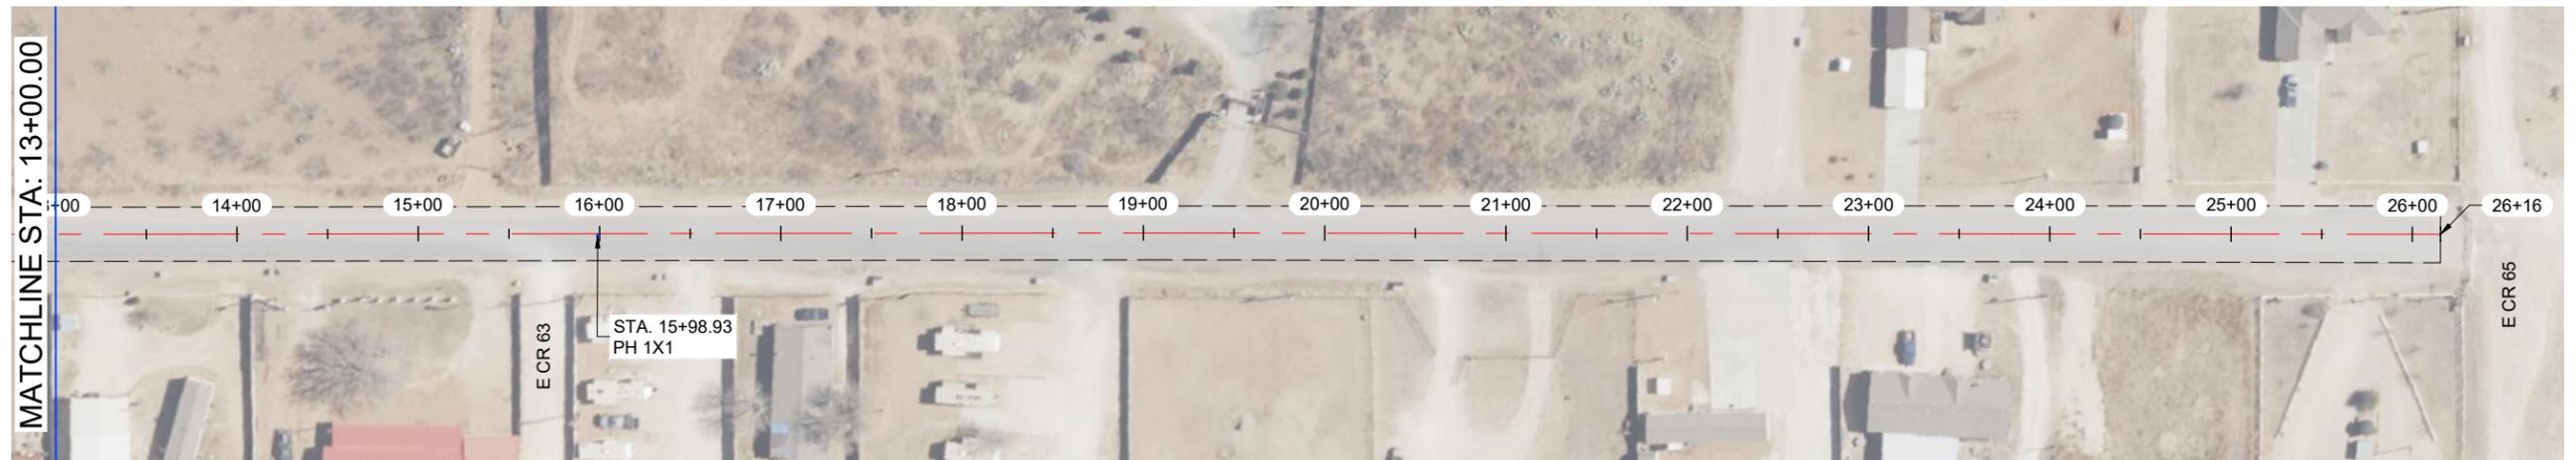


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

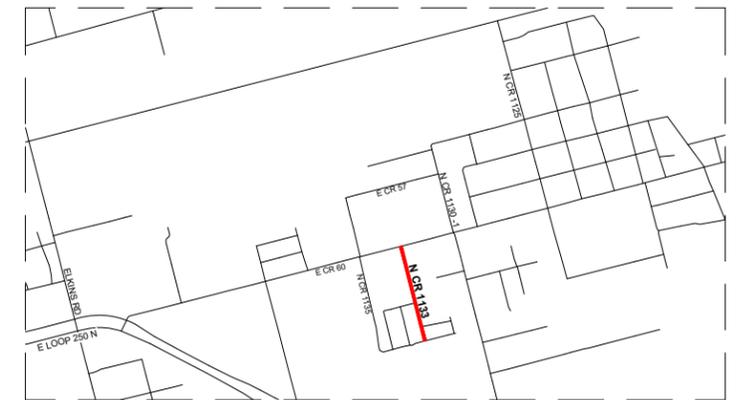

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N COUNTY ROAD 1133 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	8 892	SY	
2	STRIPING	2 566	LF	
3	SOLID WHITE EDGE LINES	5 131	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	4.7	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	



West Texas Consultants, Inc.  
ENGINEERS | PLANNERS | SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.




MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
N COUNTY ROAD 1133						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-31.0	

N COUNTY ROAD 1130 -1



N COUNTY ROAD 1130 -1

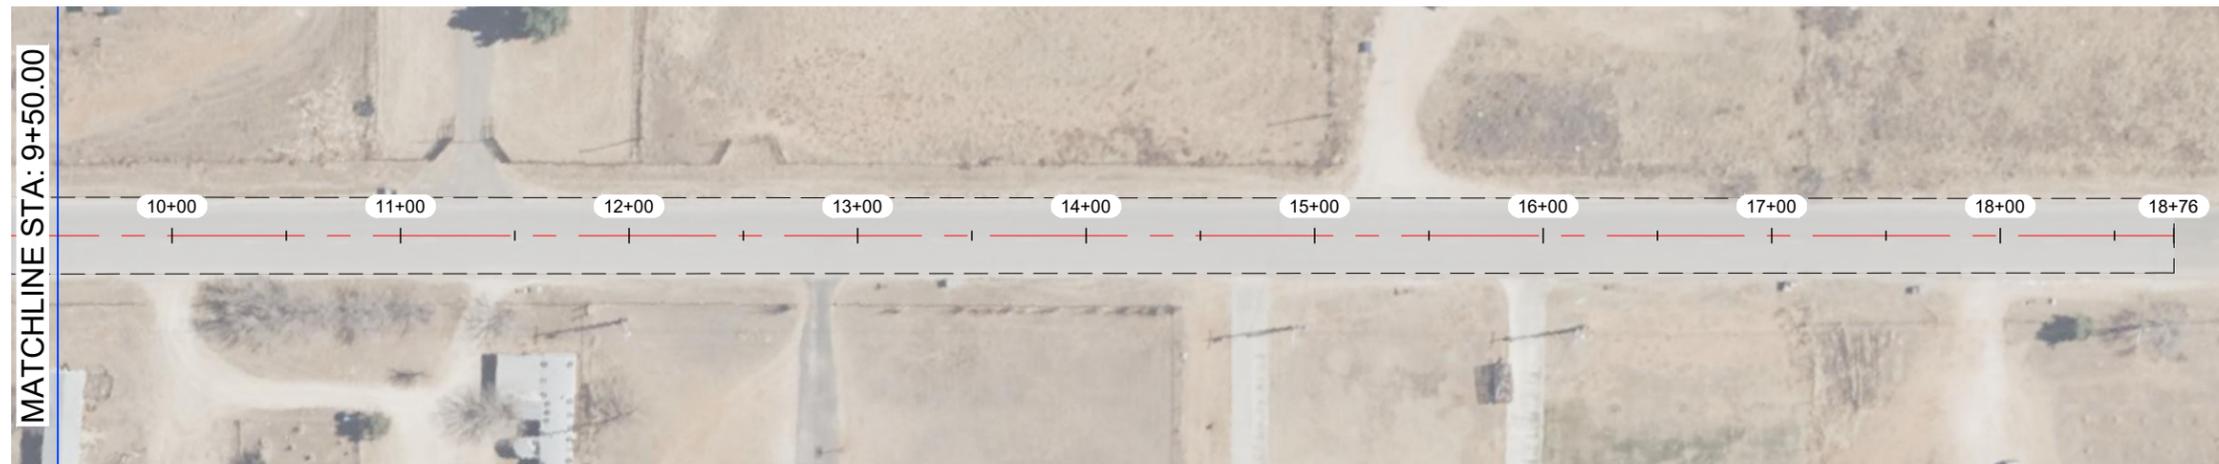


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

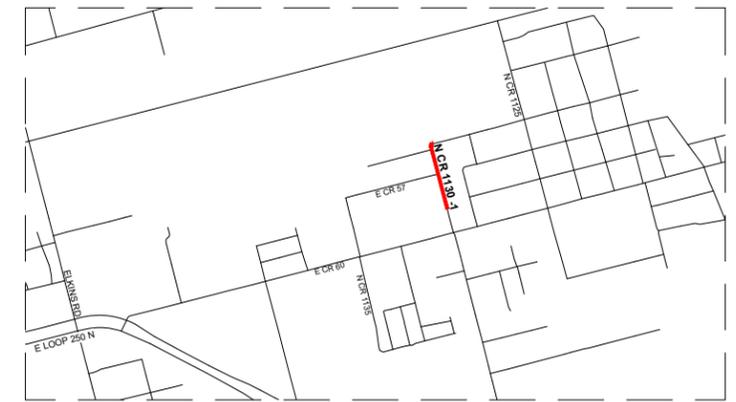

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N COUNTY ROAD 1130 -1 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	7 007	SY	
2	STRIPING	1 876	LF	
3	SOLID WHITE EDGE LINES	3 752	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.0	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
N COUNTY ROAD 1130 -1						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	D-32.0	


PLAT X: PROJECT ENGINEERING & SURVEYING TEXAS MIDLAND COUNTY PAVING 2024 - DESIGN 06/26 - DRAWINGS DIVISION 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PICTA LAYOUT TAB 03/23/24 11:11 PM RWB/MSD



N COUNTY ROAD 1129

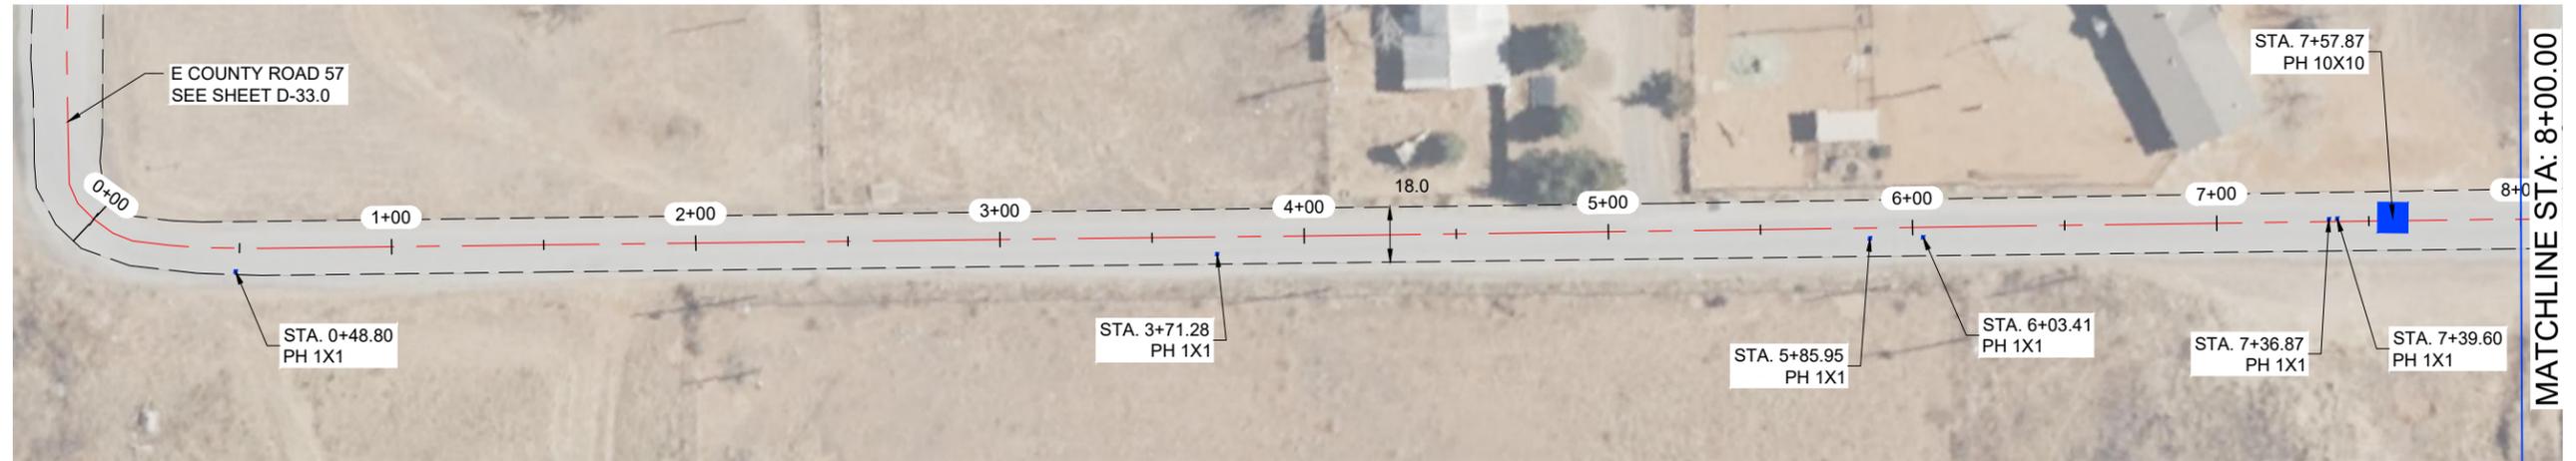



N COUNTY ROAD 1129

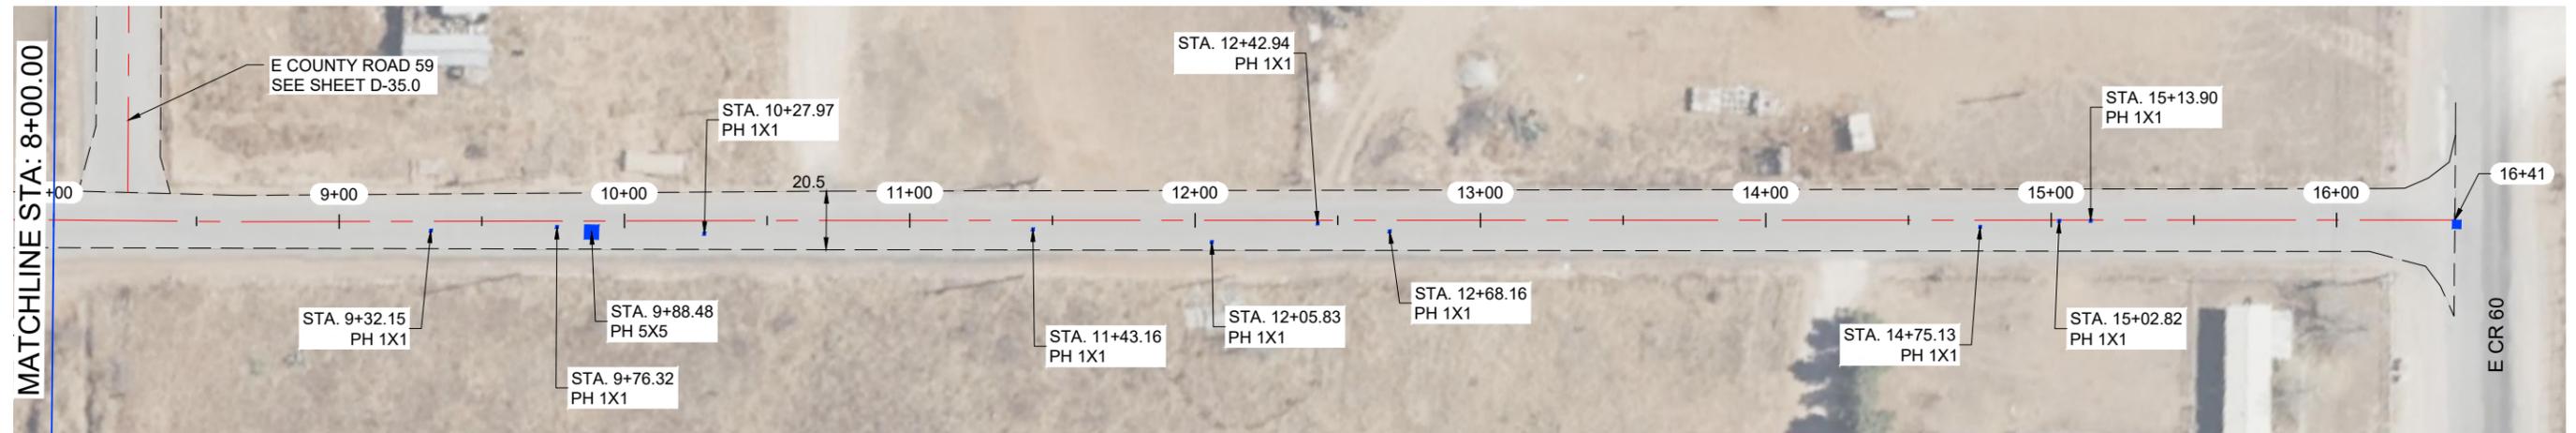

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

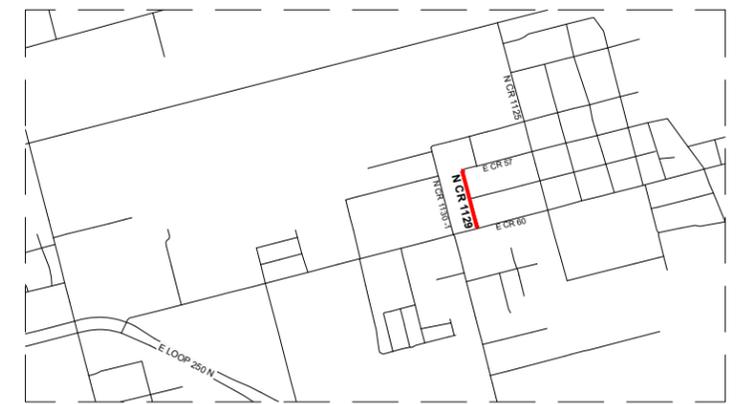

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N COUNTY ROAD 1129 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	3 575	SY	
2	STRIPING	1 616	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	16.7	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
N COUNTY ROAD 1129						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 60'	D-34.0	

**E COUNTY ROAD 59**

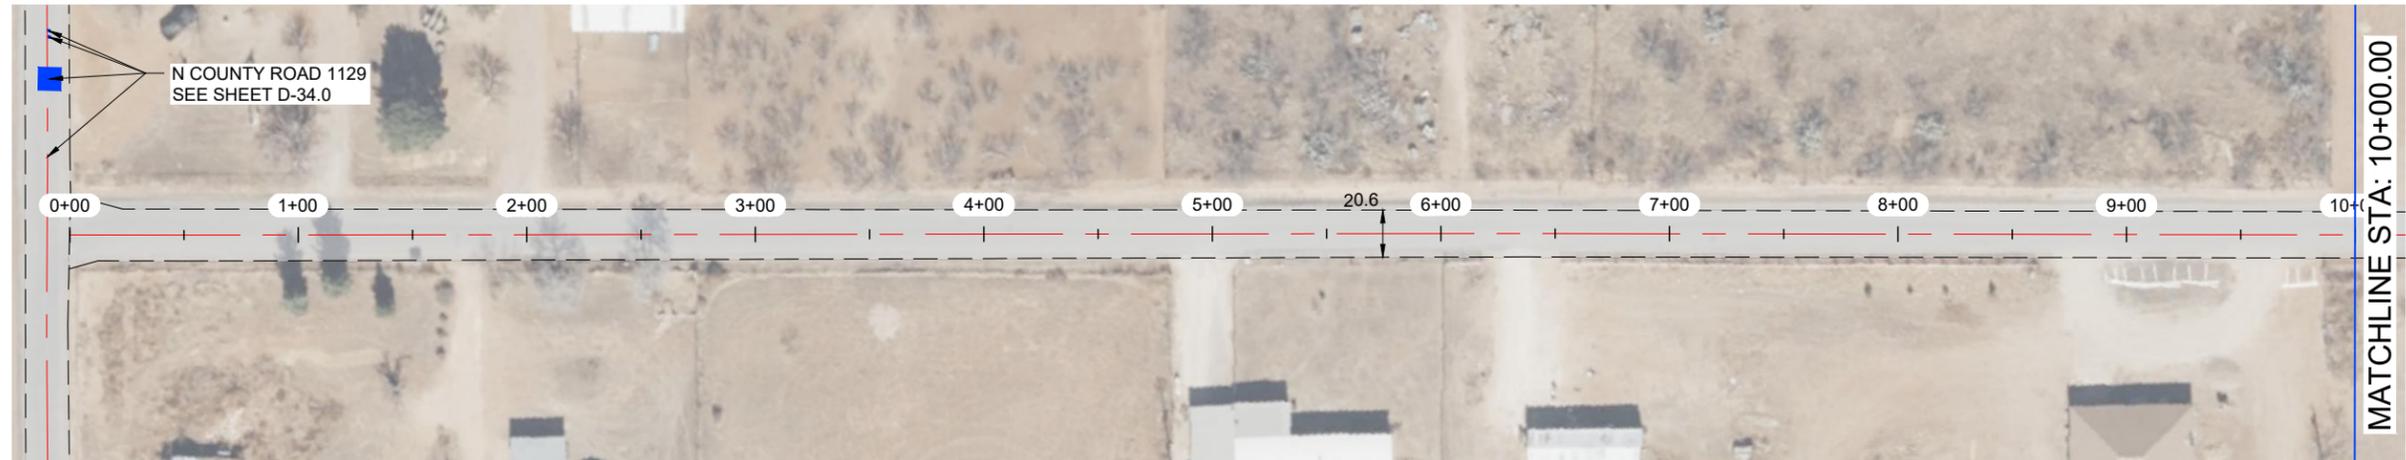

**E COUNTY ROAD 59**

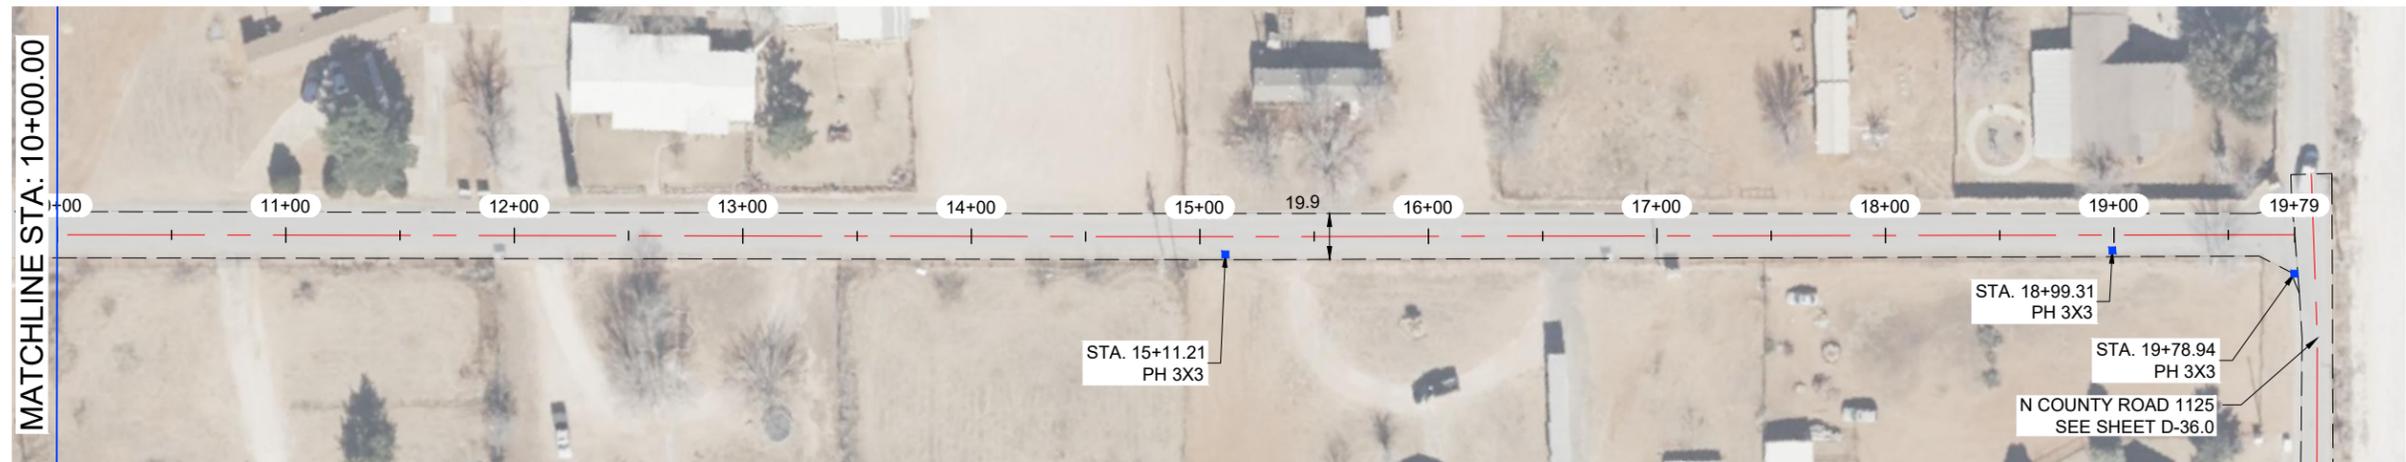


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

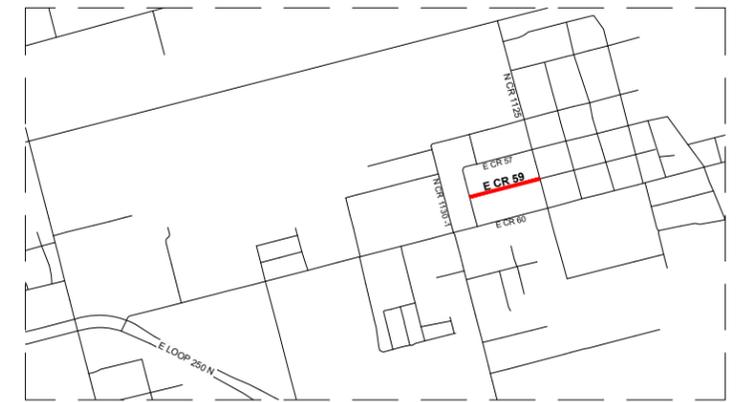

**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

E COUNTY ROAD 59 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	4 512	SY	
2	STRIPING	1 929	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	3.0	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	



**West Texas Consultants, Inc.**  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE


LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
E COUNTY ROAD 59						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	D-35.0	

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\TEXAS\MIDLAND COUNTY PAVING 2024 - DESIGN\6026 - DRAWINGS\DWG\6026\MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB D-35.0 E COUNTY ROAD 59-3/22/2024 1:17 PM RMOEDR


N COUNTY ROAD 1125

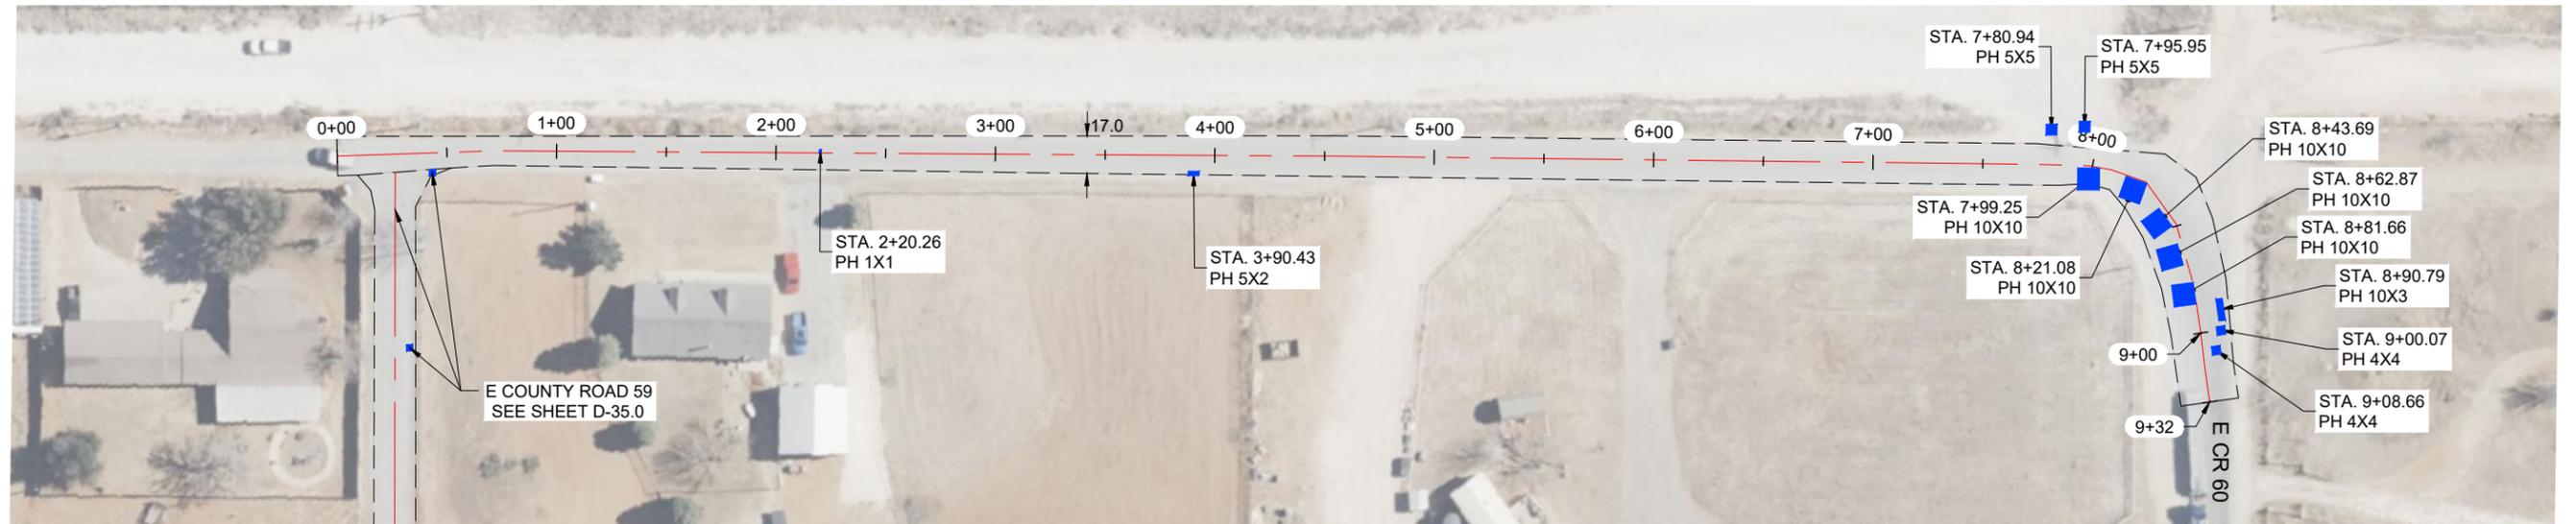


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

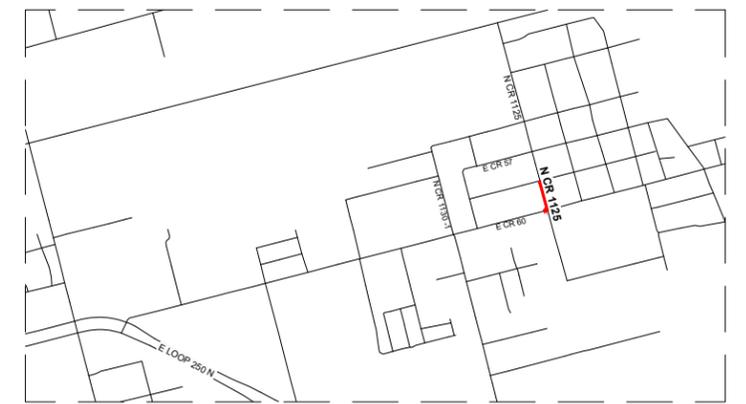

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N COUNTY ROAD 1125 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	1 926	SY	
2	STRIPING	932	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	69.2	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545



TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
N COUNTY ROAD 1125						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 80'	D-36.0	

S COUNTY ROAD 1130



S COUNTY ROAD 1130


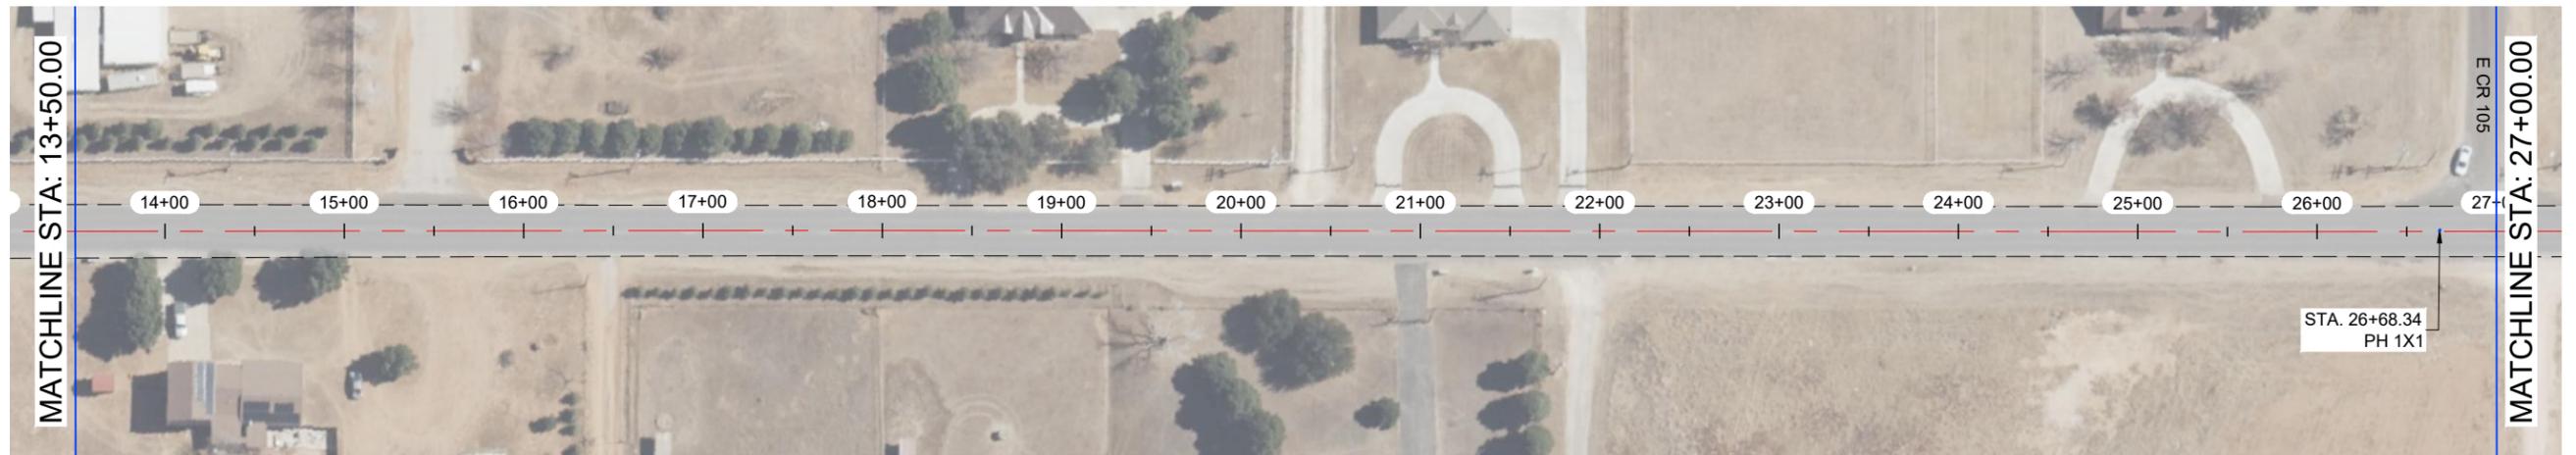


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

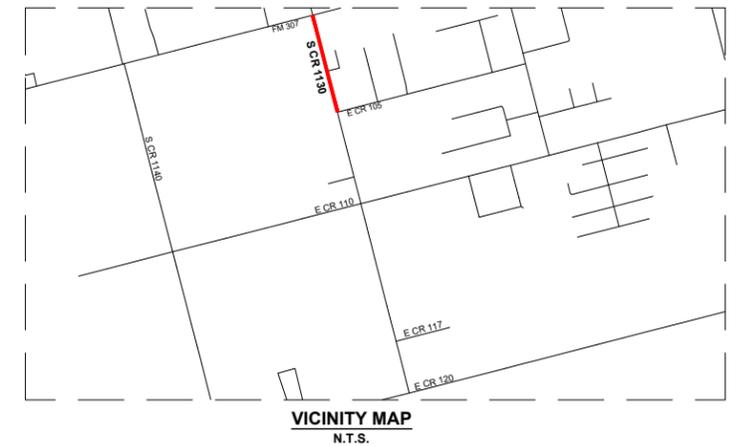

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1130 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	33 655	SY	
2	STRIPING	10 542	LF	
3	SOLID WHITE EDGE LINES	21 084	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	66.1	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545



TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
S COUNTY ROAD 1130					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-37.0

S COUNTY ROAD 1130

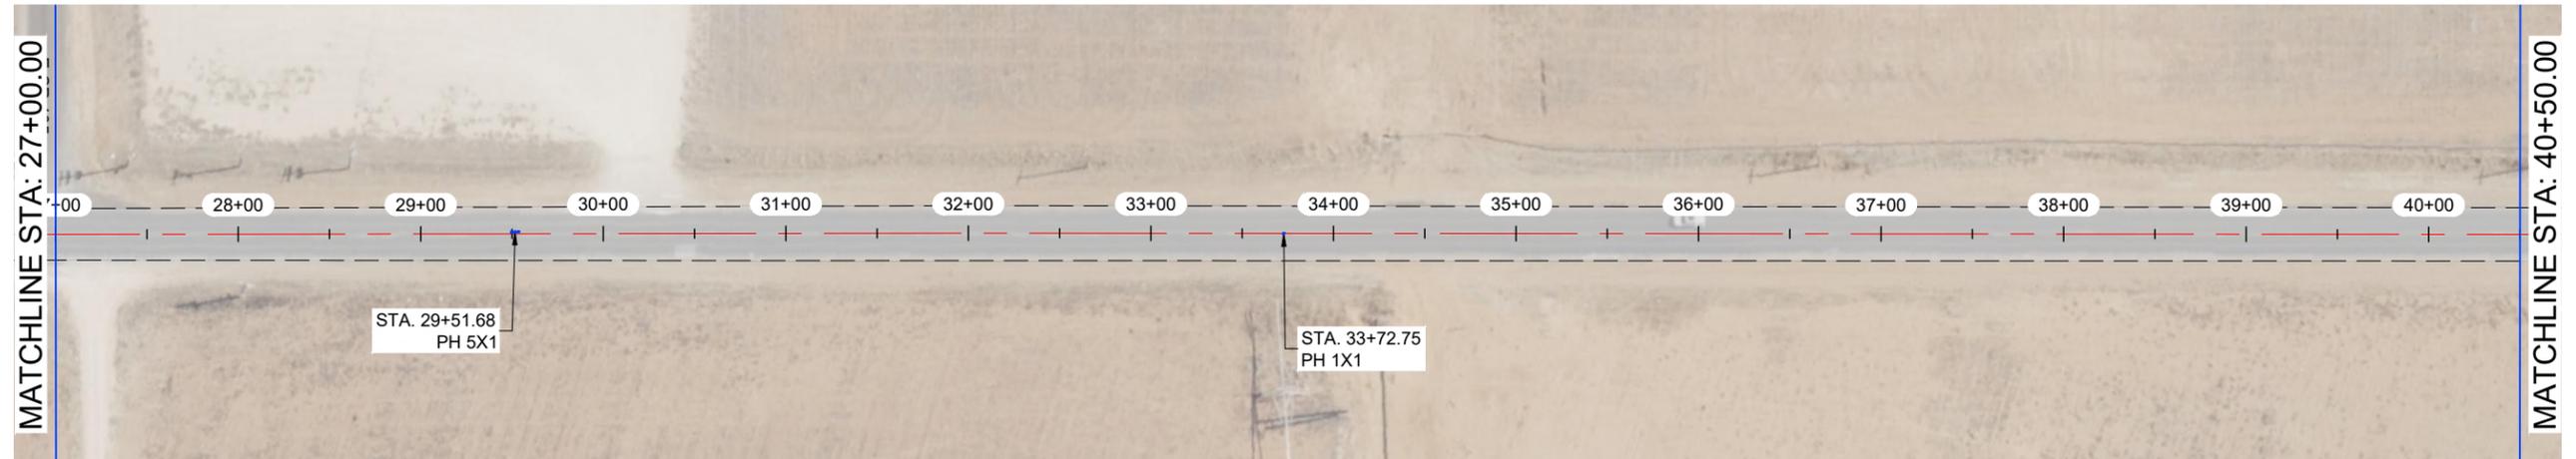



S COUNTY ROAD 1130

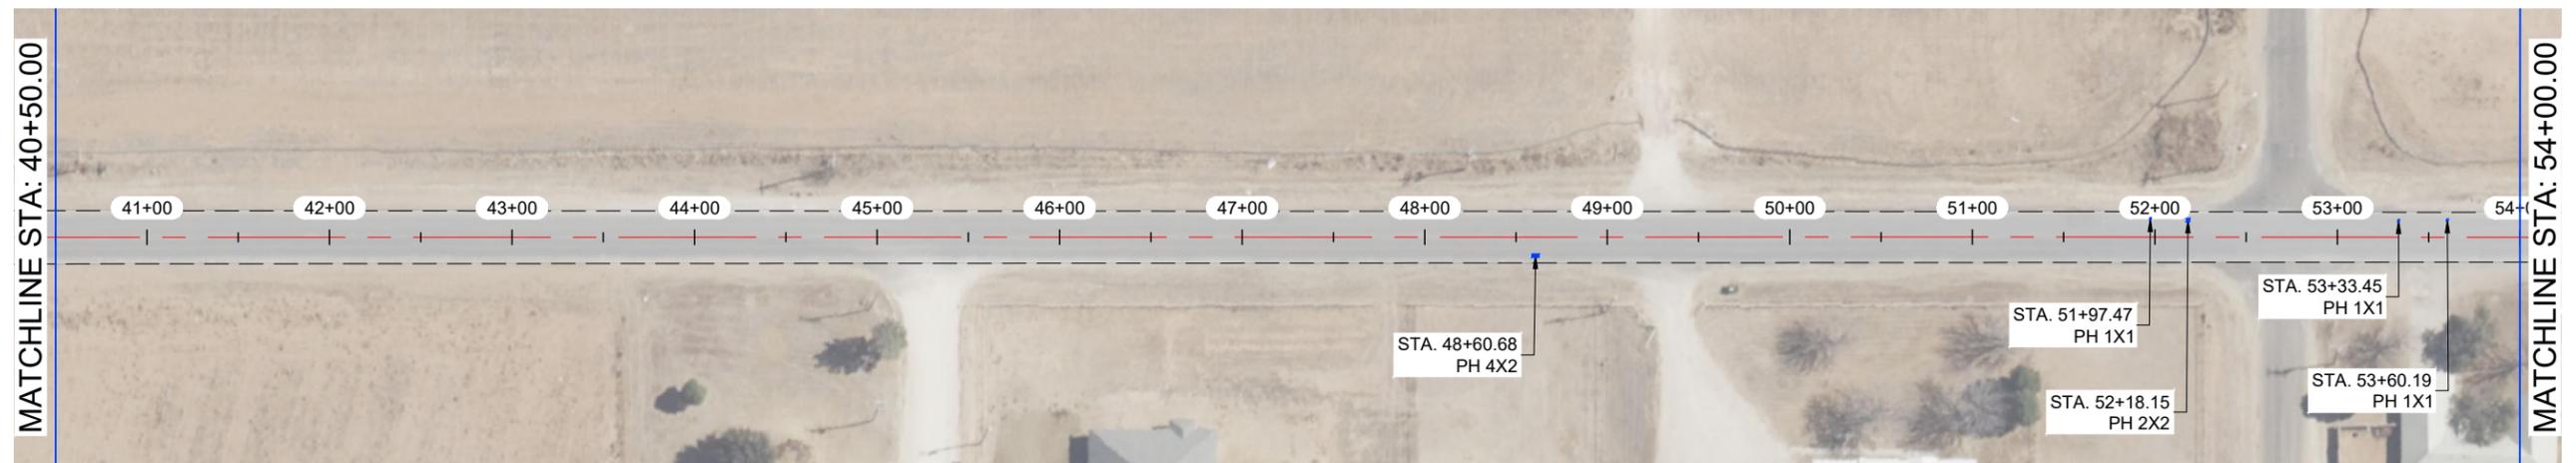

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

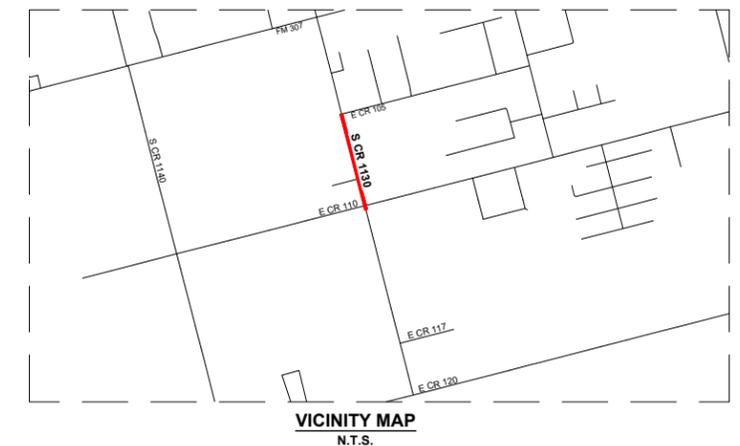

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1130 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)		SY	
2	STRIPING		LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)		SY	
2	EDGE PATCHING (BY OTHERS)		SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1130						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-37.1	



S COUNTY ROAD 1130

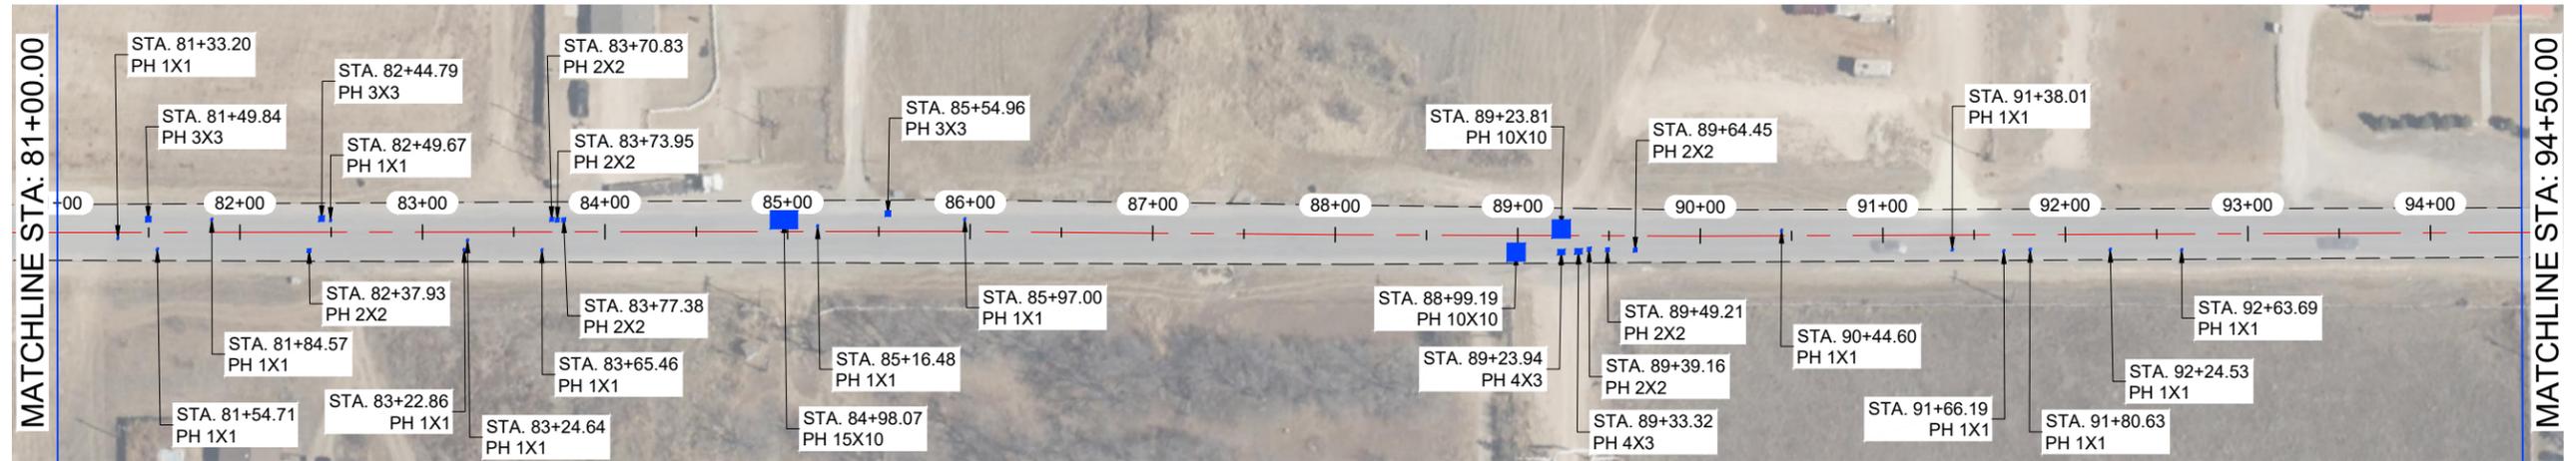


S COUNTY ROAD 1130

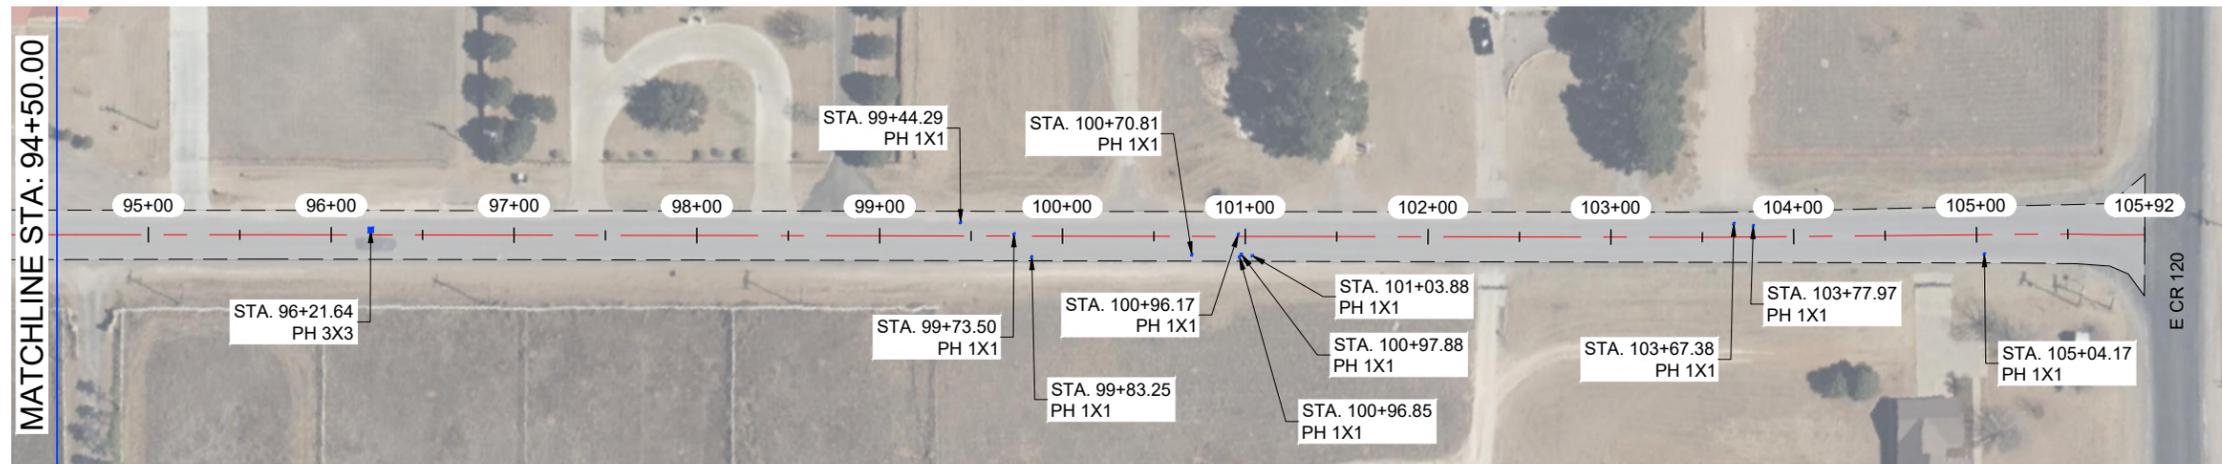

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1130 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)		SY	
2	STRIPING		LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)		SY	
2	EDGE PATCHING (BY OTHERS)		SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM


MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1130						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-37.3	

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\TEXAS\MIDLAND COUNTY PAVING\2024\MIDLAND PAVEMENT MAINTENANCE PROJECT\FIG1A.LAYOUT.TAB: 03/23/2024 1:12 PM (HW:RMB)

S COUNTY ROAD 1085 -2





S COUNTY ROAD 1085 -2

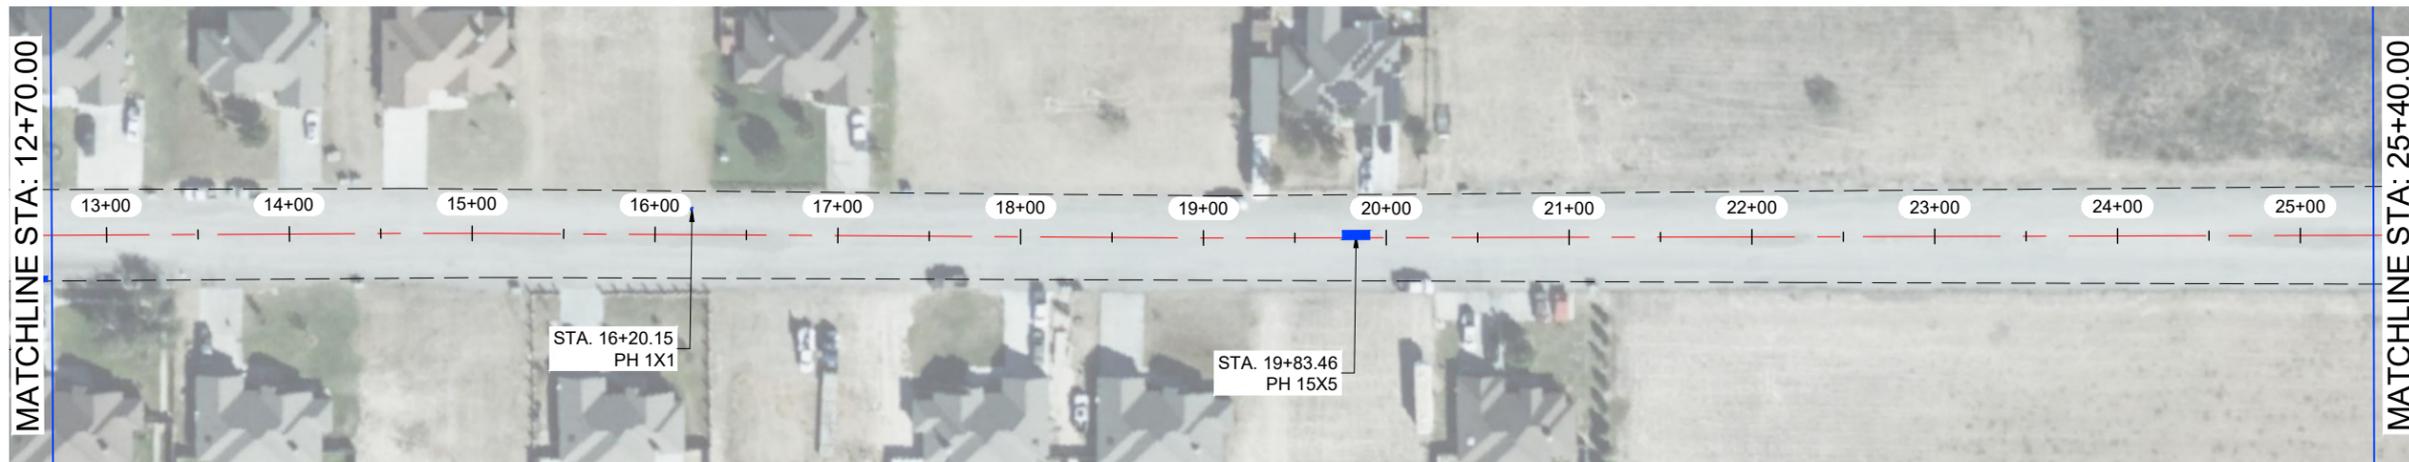

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

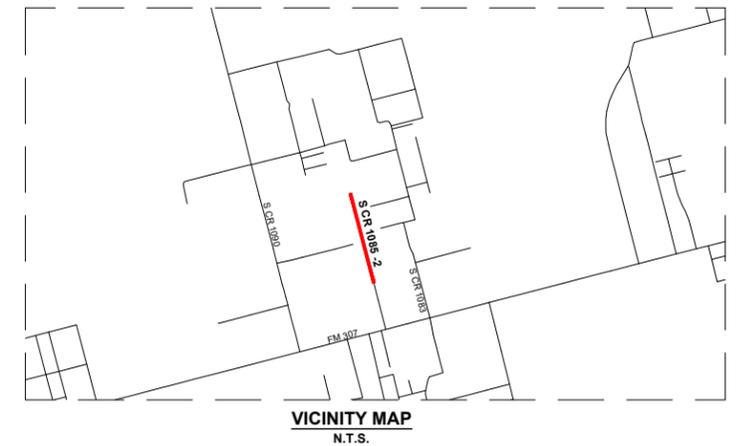

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1085 -2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	20 198	SY	
2	STRIPING	3 784	LF	
3	SOLID WHITE EDGE LINES	7 568	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	55.8	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1085 -2						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-38.0	

**S COUNTY ROAD 1085 -2**

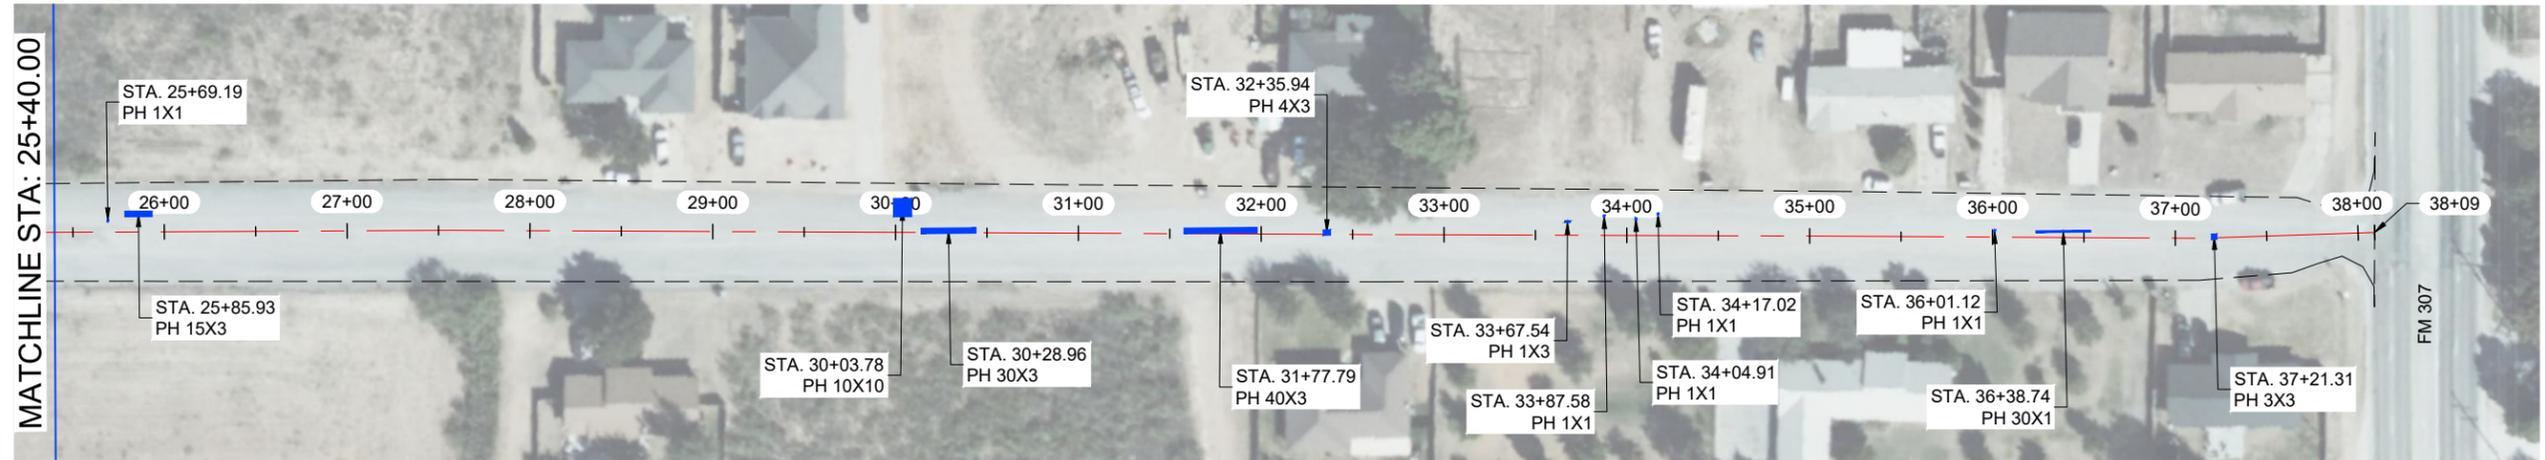

*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1085 -2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)		SY	
2	STRIPING		LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)		SY	
2	EDGE PATCHING (BY OTHERS)		SY	



**West Texas Consultants, Inc.**  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.




Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545  
TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM





MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1085 -2						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-38.1	

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\TEXAS\MIDLAND COUNTY PAVING\2024-03-22\2024-03-22\MIDLAND COUNTY PAVEMENT MAINTENANCE PROJECT\FIG 1.DWG DATE: 3/22/2024 11:13 AM DRAWN BY: J.C.T.

**S COUNTY ROAD 1086**

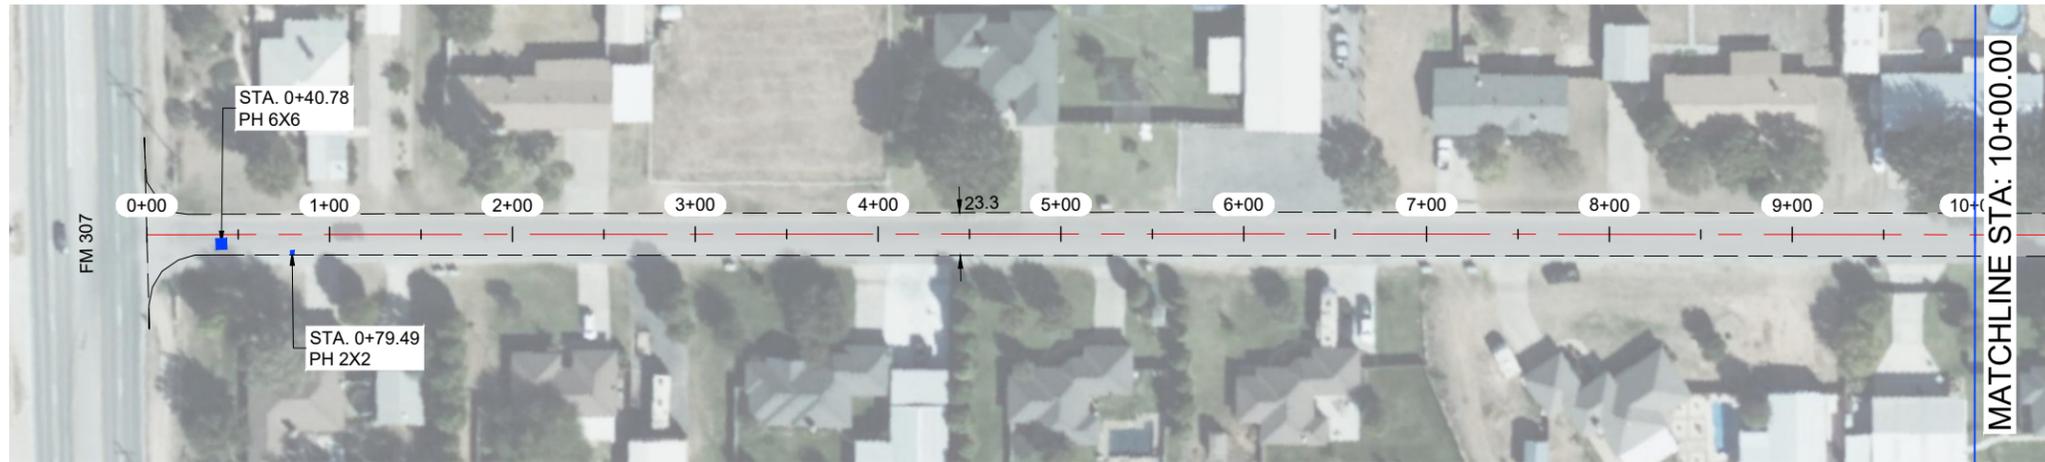

**S COUNTY ROAD 1086**

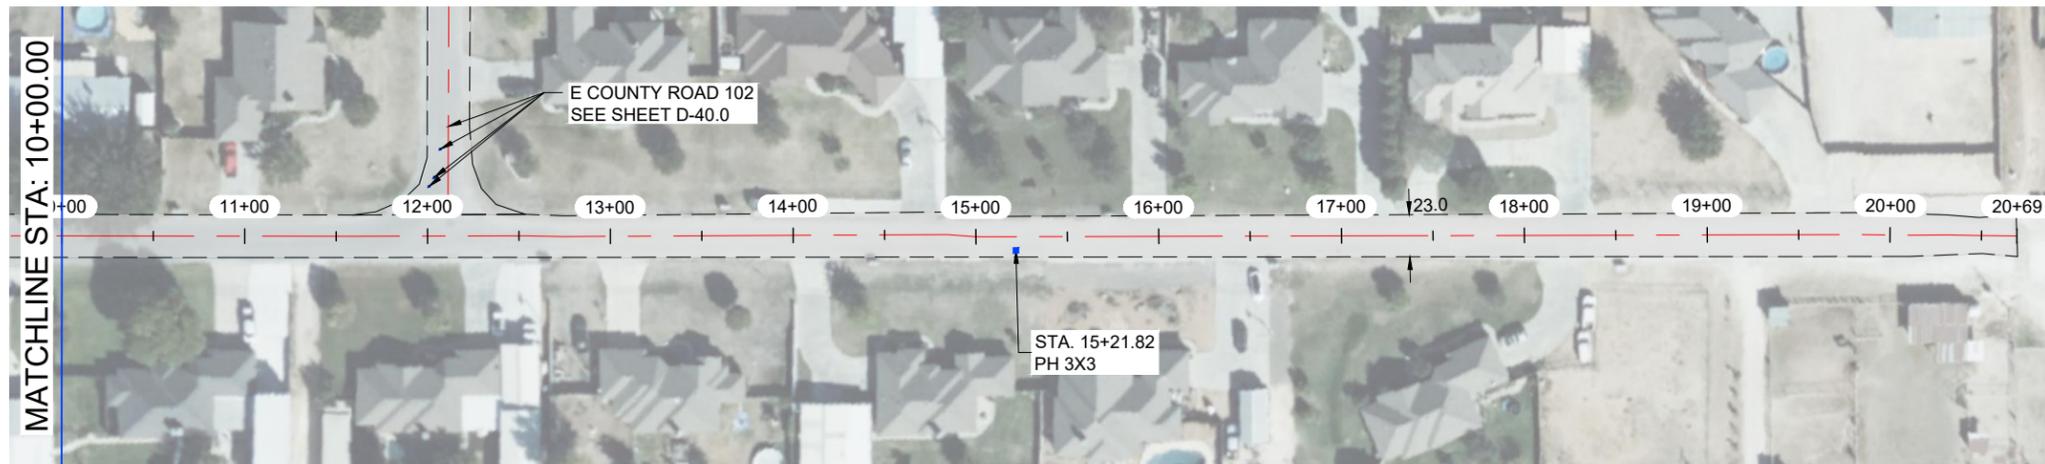


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS



**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1086 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5 357	SY	
2	STRIPING	2 019	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	5.4	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.



CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1086						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-39.0	

E COUNTY ROAD 102

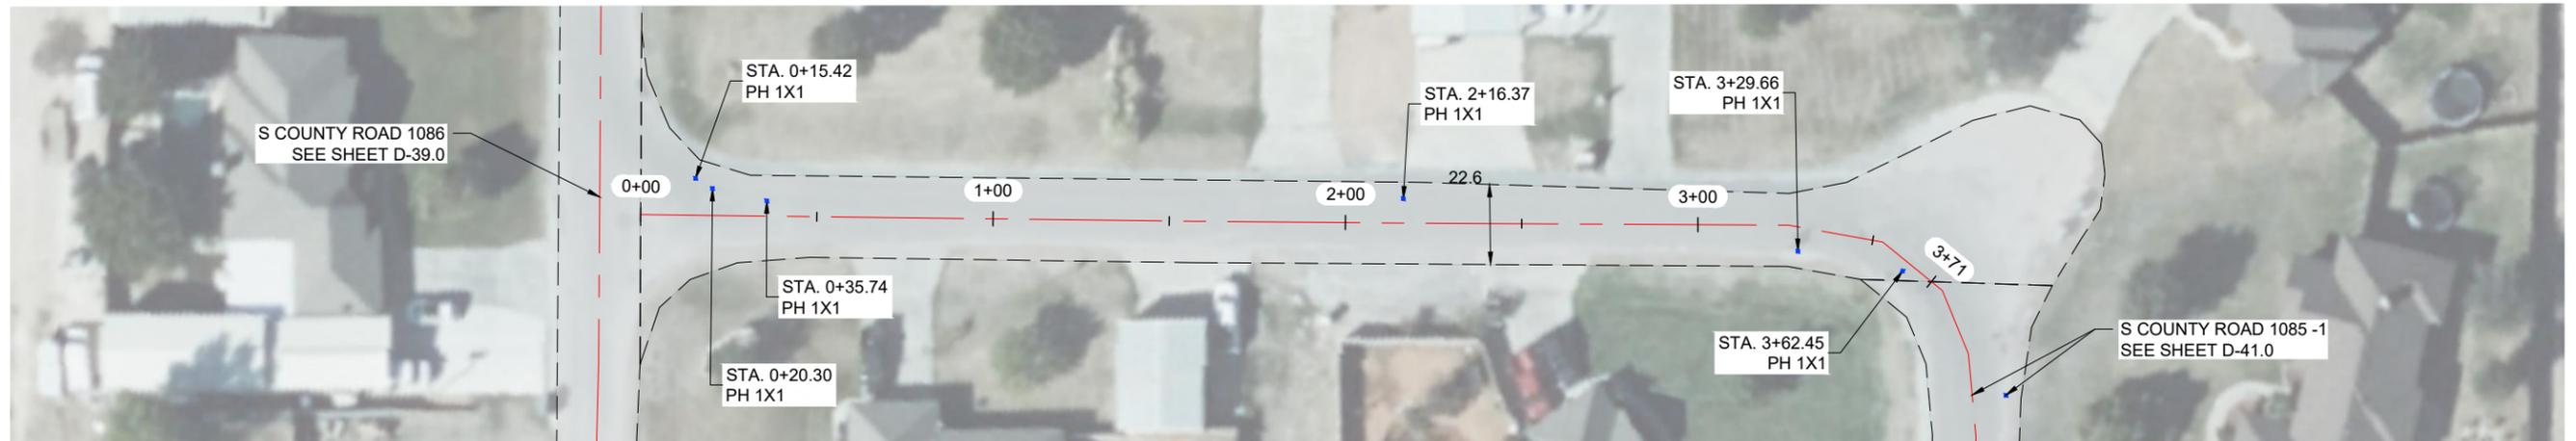


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

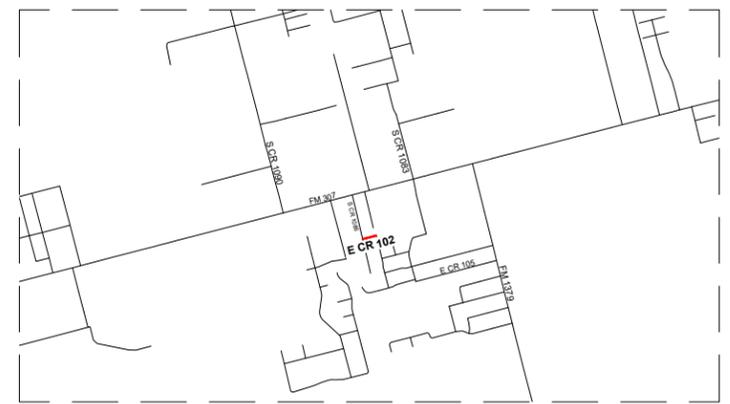

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

E COUNTY ROAD 102 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	1 256	SY	
2	STRIPING	346	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.7	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS



2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

E COUNTY ROAD 102

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 50'	D-40.0

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND\2024 MIDLAND PAVEMENT MAINTENANCE PROJECT\FIG 1.DWG E COUNTY ROAD 102\20240313.PDW ROMERO

**S COUNTY ROAD 1085 -1**

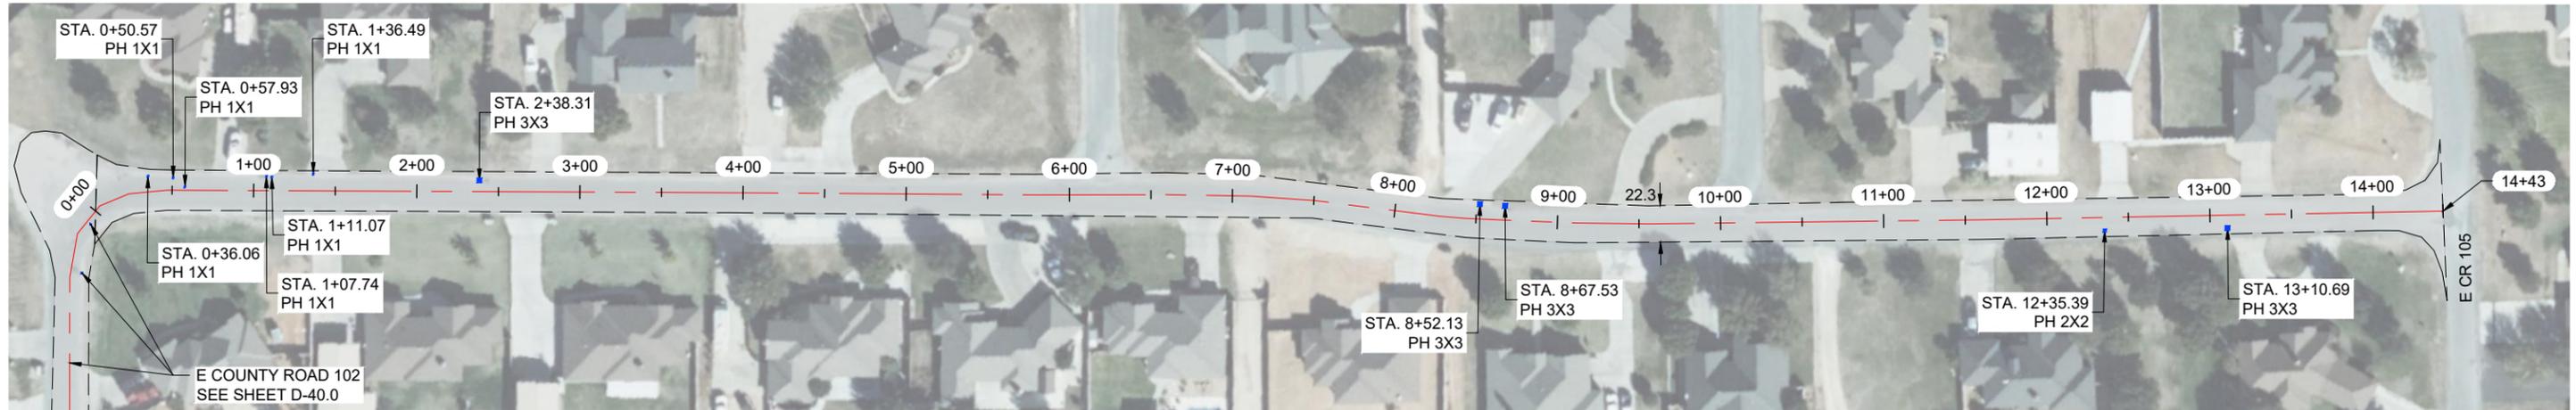


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

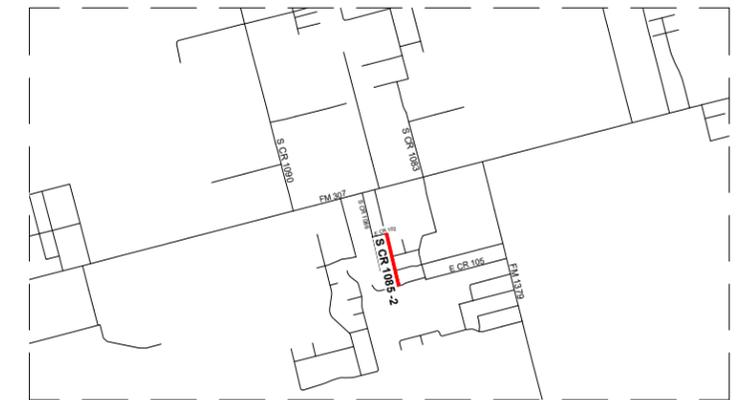

**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1085 -1 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	3 929	SY	
2	STRIPING	1 418	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	5.1	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**ENGINEERS | SURVEYORS**

**West Texas Consultants, Inc.**  
 ENGINEERS PLANNERS SURVEYORS  
 405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
 TEXAS REGISTERED ENGINEERING FIRM F-2746  
 TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S COUNTY ROAD 1085 -1						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-41.0	

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\MIDLAND COUNTY PAVING\2024-03-22\2024-03-22\MIDLAND COUNTY PAVEMENT MAINTENANCE PROJECT\FIG. D-41.0 S COUNTY ROAD 1085 -1.DWG (REVISED)

**S COUNTY ROAD 1063 -2**

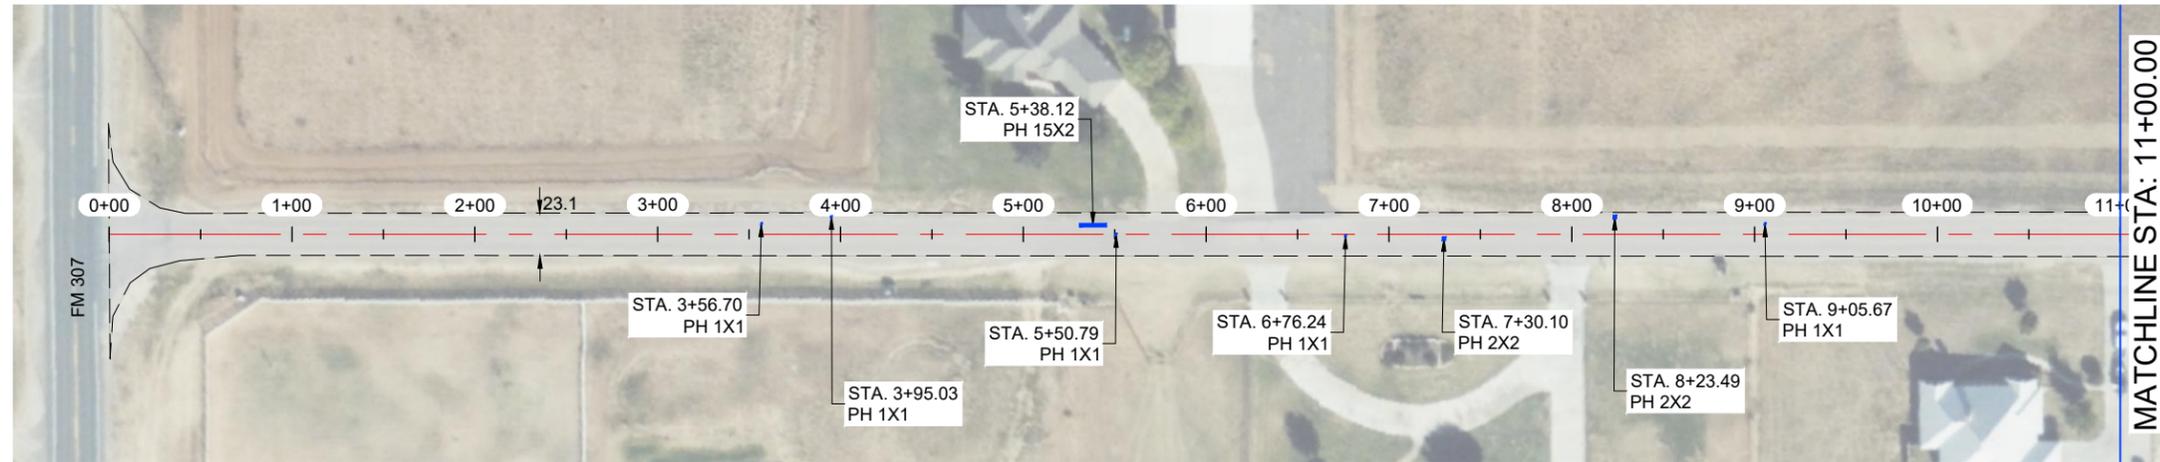

**S COUNTY ROAD 1063 -2**

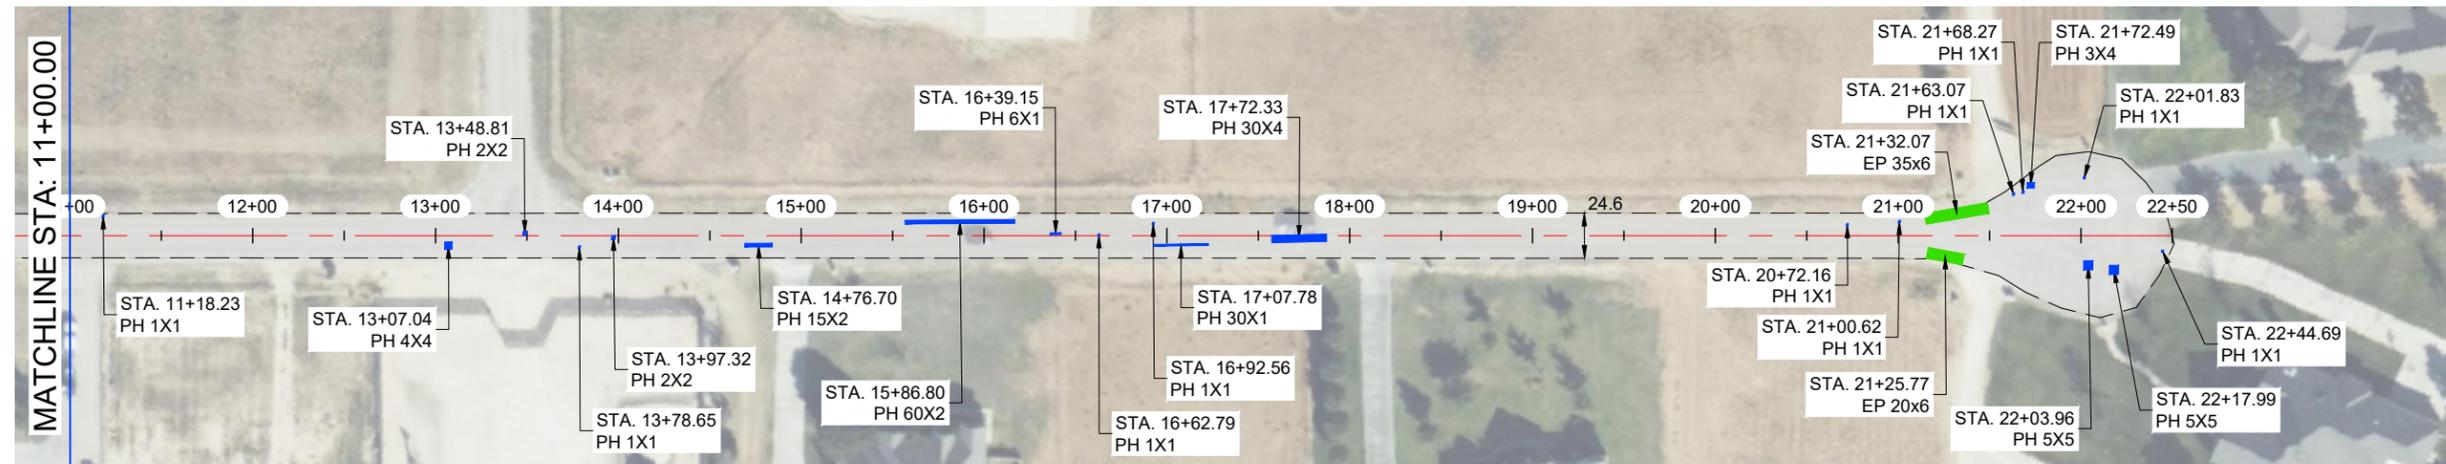


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

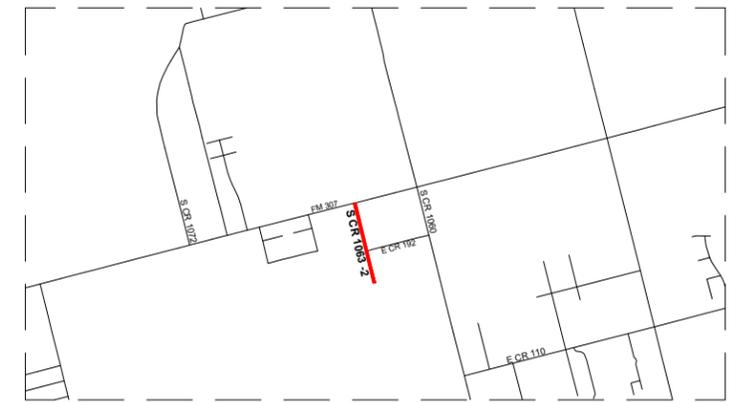

**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1063 -2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	6 622	SY	
2	STRIPING	2 200	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	49.4	SY	
2	EDGE PATCHING (BY OTHERS)	36.7	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

**MIDLAND COUNTY, TEXAS**



2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

S COUNTY ROAD 1063 -2

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-42.0

PLAT. X: PROJECT ENGINEERING & SURVEYING TEXAS MIDLAND COUNTY PAVING 2024 - DESIGN 0626 - DRAWINGS DIVISION 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB: 0423 S COUNTY ROAD 1063 -2 20240313 13 PM RW0600

S COUNTY ROAD 1063 -1

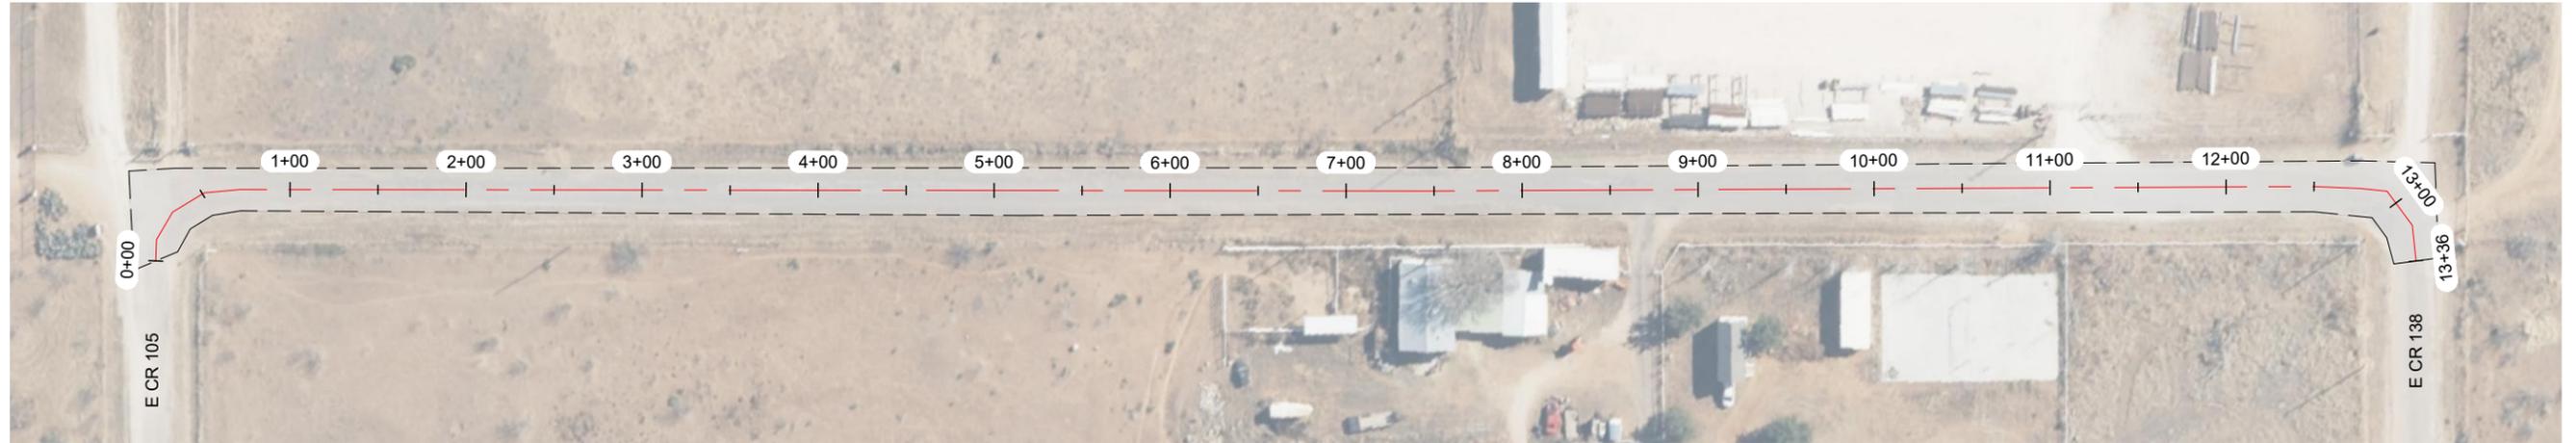


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMEND PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEET A-2.0 AND A-2.1 FOR DETAILS

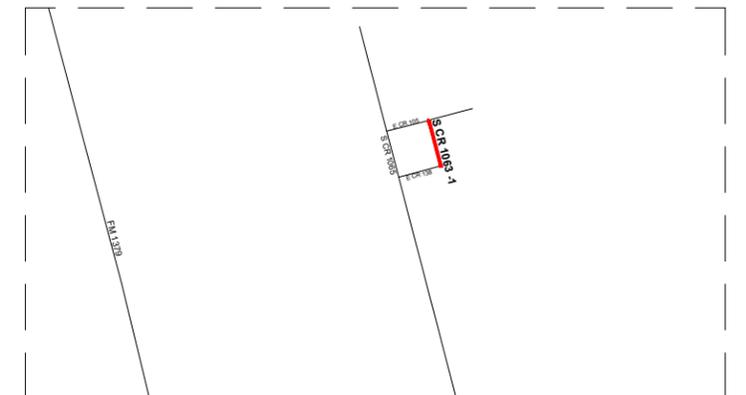

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S COUNTY ROAD 1063 -1 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	4 077	SY	
2	STRIPING	1 336	LF	
3	SOLID WHITE EDGE LINES	2 672	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.0	SY	
2	EDGE PATCHING (BY OTHERS)	0.0	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 |(432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS

2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

S COUNTY ROAD 1063 -1

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	I.R.	3/22/24	56276	1" = 100'	D-43.0

PLAT X: PROJECT ENGINEERING & SURVEYING TEXAS MIDLAND COUNTY PAVING 2024 - DESIGN 06/26 - DRAWINGS 05/06/2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PCD/LAYOUT TAB: D43.0 S COUNTY ROAD 1063 -1 03/22/2024 1:10 PM R00060

MIDLAND COUNTY, TEXAS  
2024 PAVEMENT MAINTENANCE PROJECT - PRECINCT 3

MARCH 2024

TWO COURSE SEAL COAT

SHEET INDEX

- E-0.0 COVER
- E-1.0 - ADVANCE AVE
- E-2.0 - E CITY VIEW RD
- E-3.0 - E INDUSTRIAL LP
- E-4.0 - ELWYN
- E-5.0 - FAIRGROUNDS RD
- E-6.0 - FLYNT
- E-7.0 - HALE
- E-8.0 - S CR 1192
- E-9.0 - S CR 1193
- E-10.0 - S CR 1194
- E-11.0 - S CR 1195
- E-12.0 - S CR 1196
- E-13.0 - S CR 1197
- E-14.0 - S CR 1198
- E-15.0 - S CR 1211
- E-16.0 - S CR 1213
- E-17.0 - S CR 1214
- E-18.0 - S CR 1215
- E-19.0 - S CR 1216
- E-20.0 - S CR 1218
- E-21.0 - S CR 1220
- E-22.0 - S INDUSTRIAL LP
- E-23.0 - S JACKSON ST
- E-24.0 - S TILDEN ST
- E-25.0 - W CR 114
- E-26.0 - W CR 115
- E-27.0 - W CR 115 (S CR 1200)
- E-28.0 - W CR 115 (S CR 1213)
- E-29.0 - W CR 116 (S CR 1200)
- E-30.0 - W CR 116 (S CR 1211)
- E-31.0 - W CR 118
- E-32.0 - W CR 120
- E-33.0 - W CR 123
- E-34.0 - W CR 125
- E-35.0 - W CR 150 (S CR 1200 TO S CR 1210)
- E-36.0 - W CR 150 (S HW 349 TO S CR 1200)
- E-37.0 - W FRANCIS AVE
- E-38.0 - CARTER AVE



MIDLAND COUNTY  
TEXAS

OWNER:

MIDLAND COUNTY, MIDLAND, TX.

UTILITY RELOCATION NOTICE:

CONTRACTOR SHALL CONTACT THE APPROPRIATE UTILITY COMPANY TO COORDINATE THE RELOCATION OF ANY UTILITY THAT IS FOUND TO BE IN CONFLICT WITH THESE CONSTRUCTION DOCUMENTS.



PREPARED BY



WEST TEXAS CONSULTANTS, INC.

ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street  
Andrews, TX 79714  
(432) 523-2181






TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

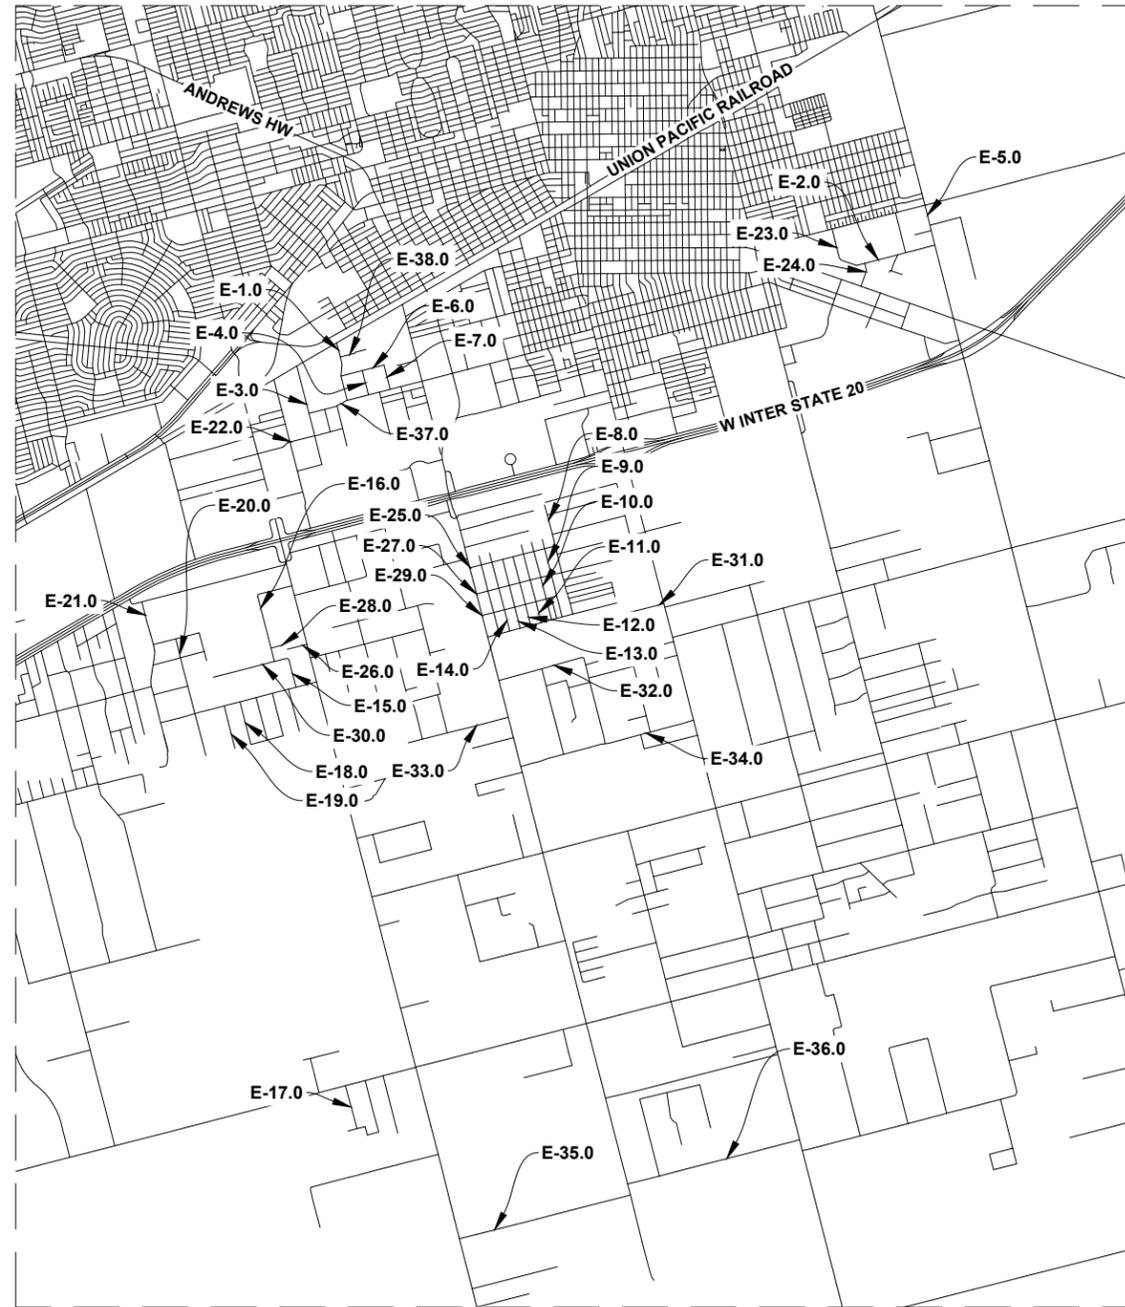

PROJECT LOCATION MAP  
NOT TO SCALE



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

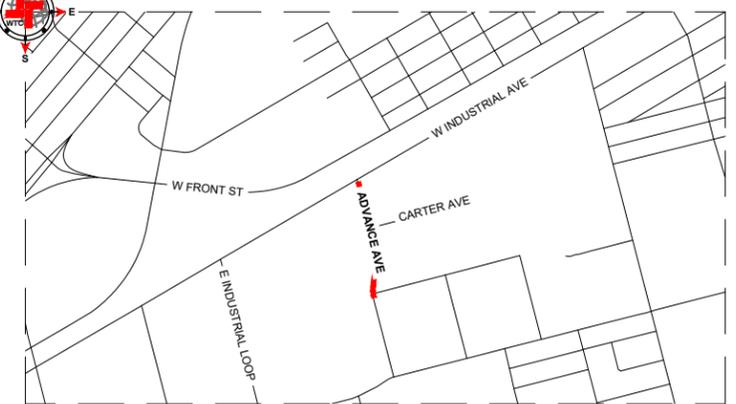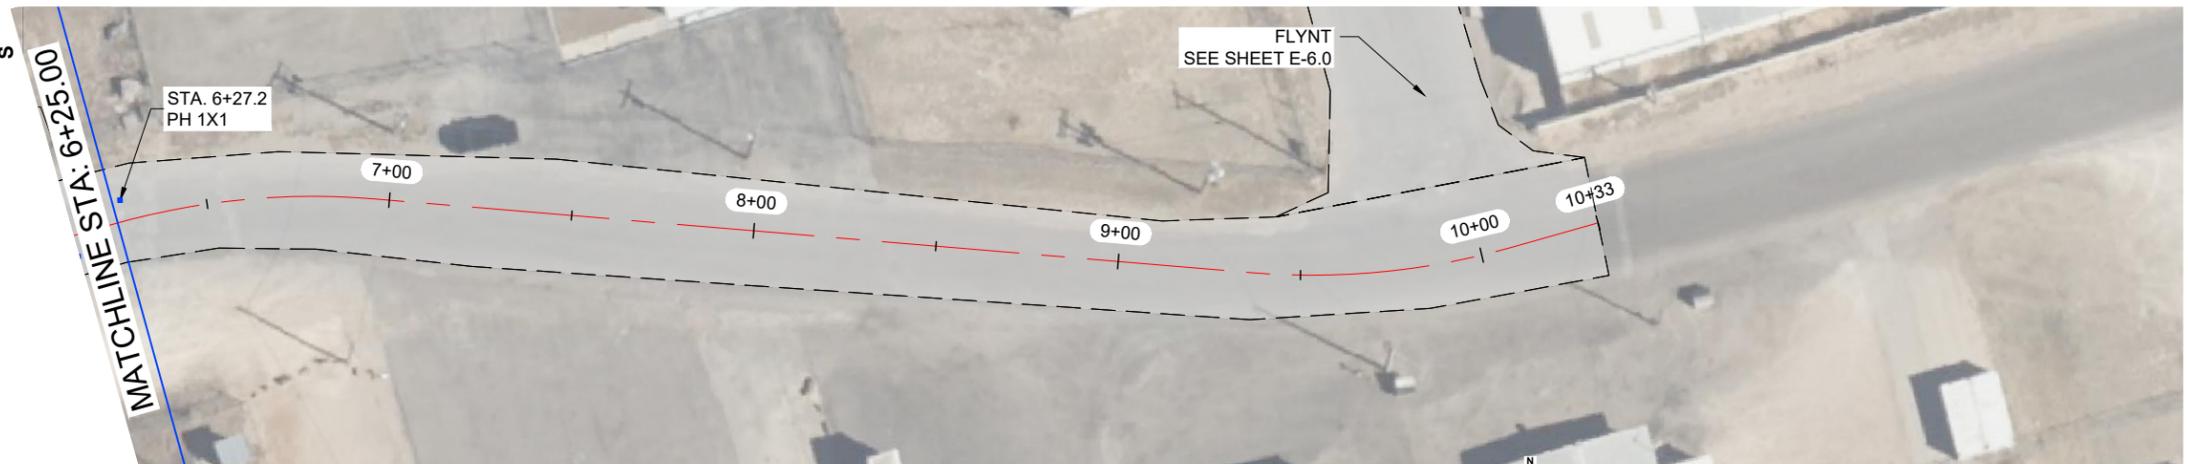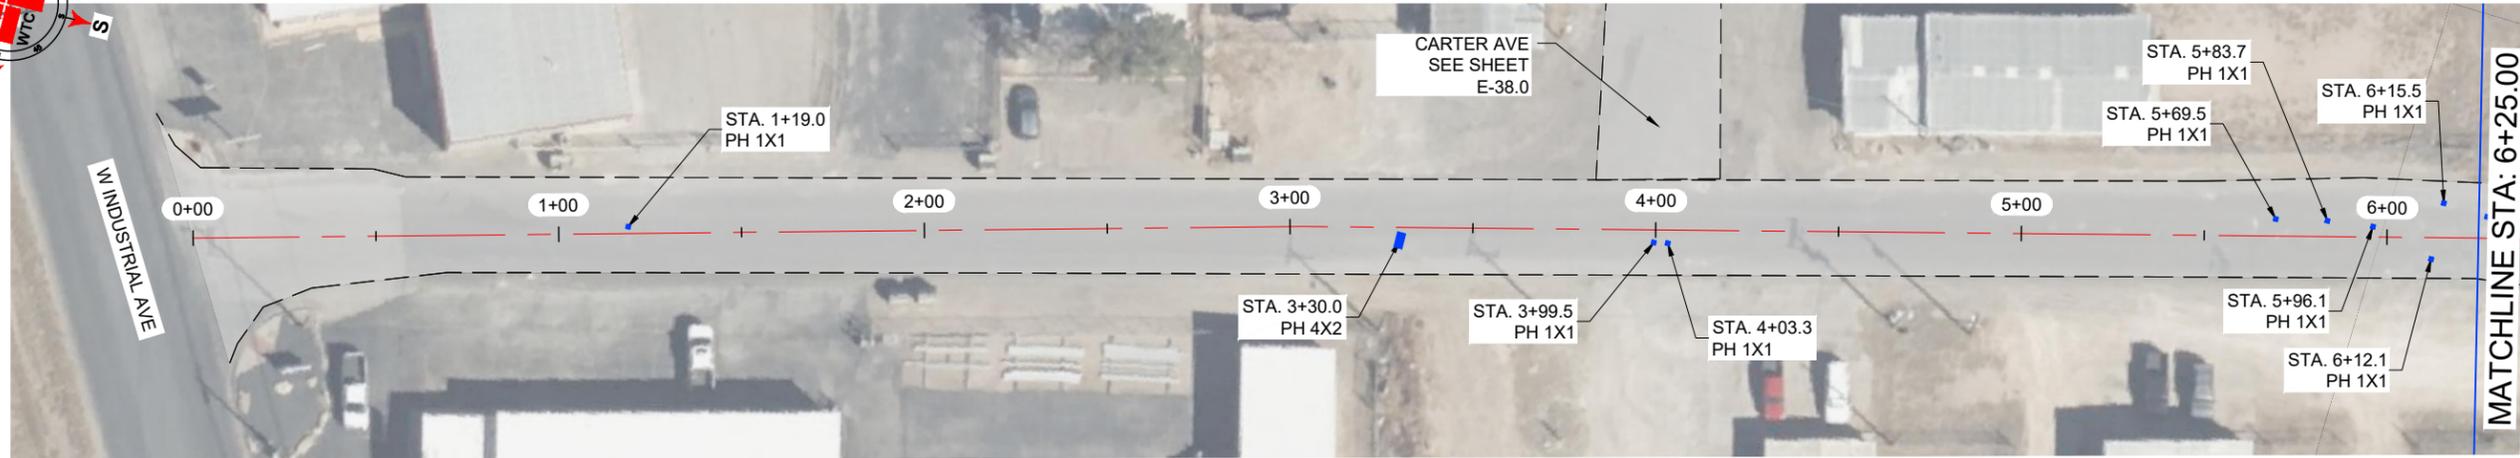

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

ADVANCE AVE QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	3,169	SY	
2	STRIPING	1,009	LF	
3	SOLID WHITE EDGE LINES	2,018	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	1.9	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.




Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545  
TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM




MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
ADVANCE AVE						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 50'	E-1.0	

PLOT: X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND COUNTY PAVING\2024 - DESIGN\6026 - DRAWINGS\2024\MIDLAND PAVEMENT MAINTENANCE PROJECT\FIG1.LAYOUT.TAB E-1.0 ADVANCE AVE 3/22/24 2:57 PM CCH/ECB

E CITY VIEW RD

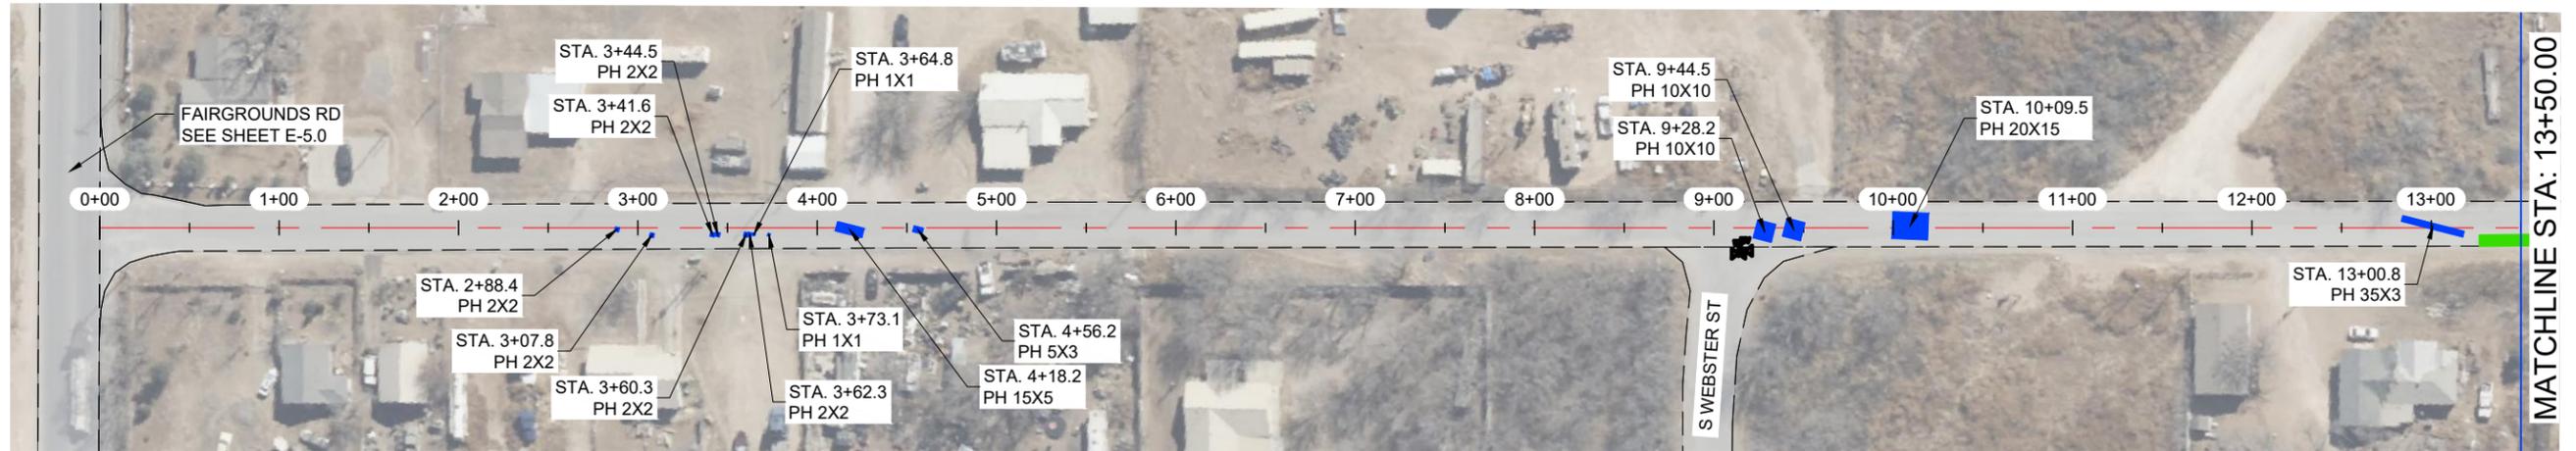

E CITY VIEW RD

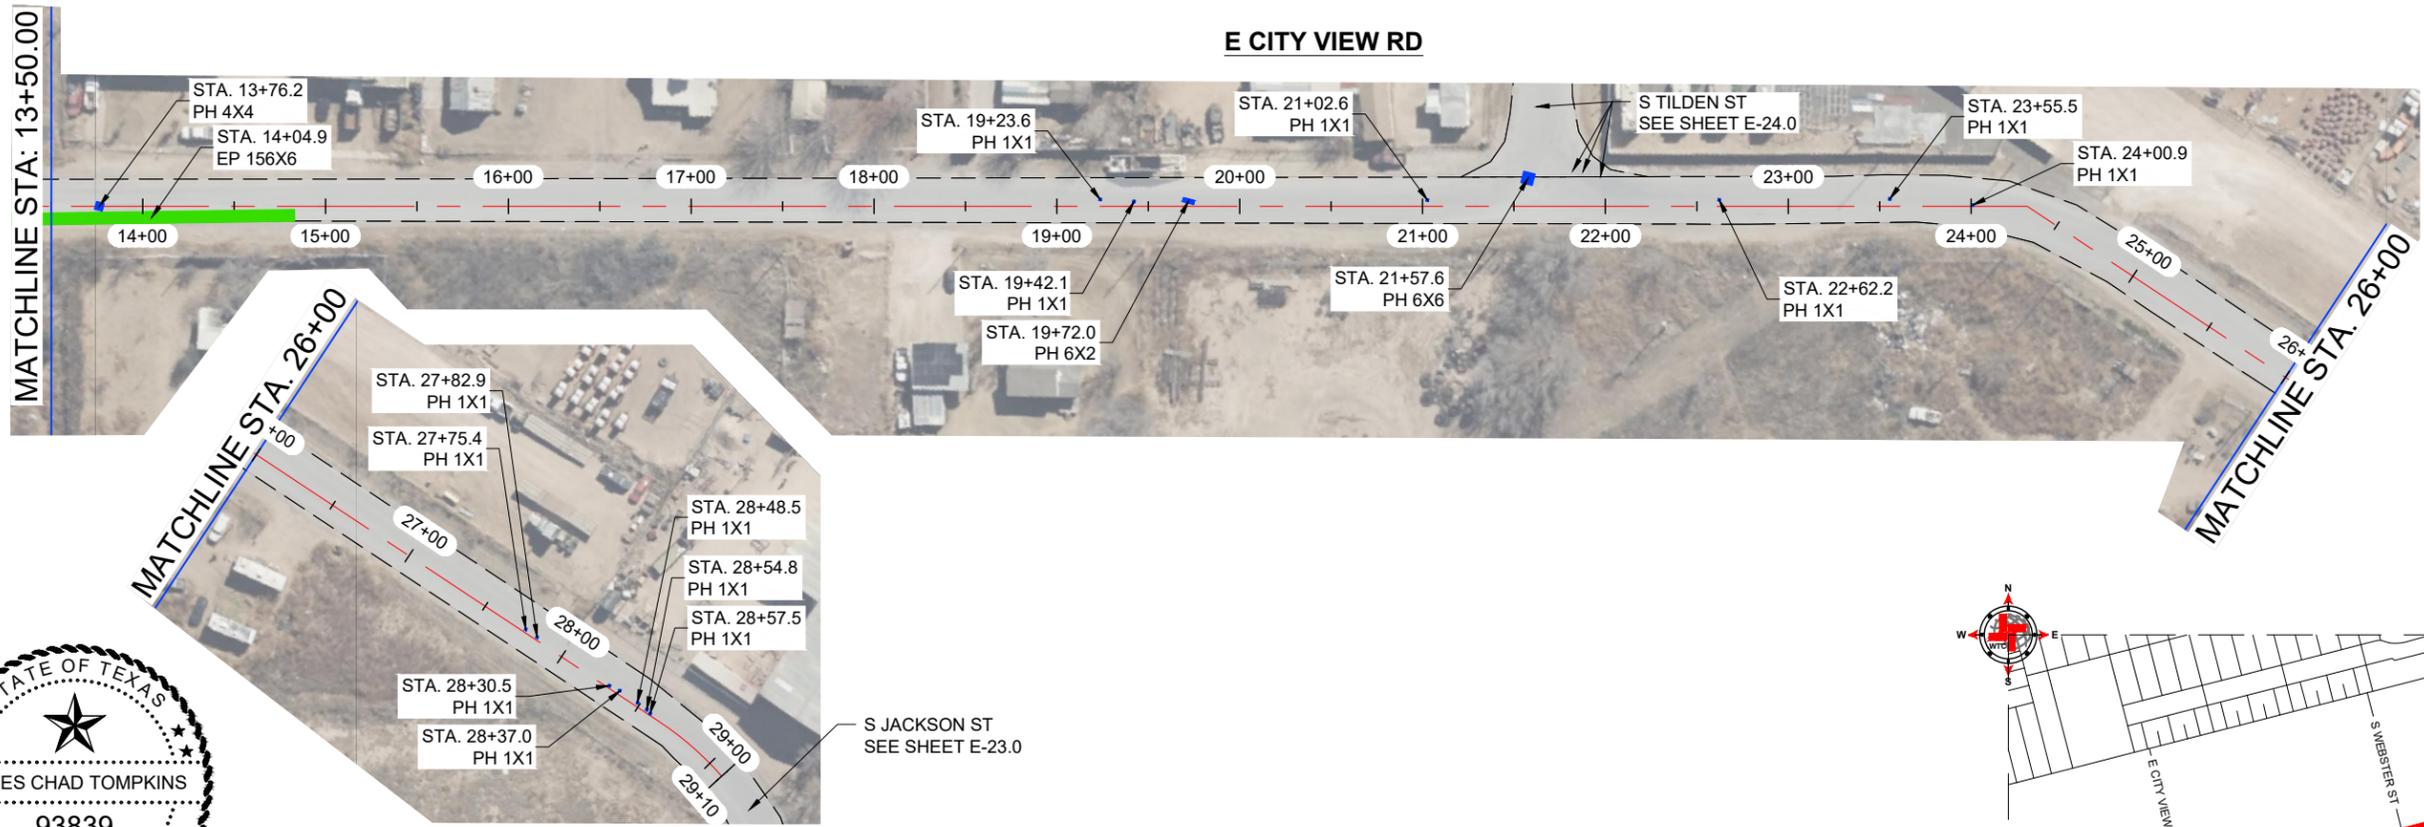


*J. Tompkins*


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS

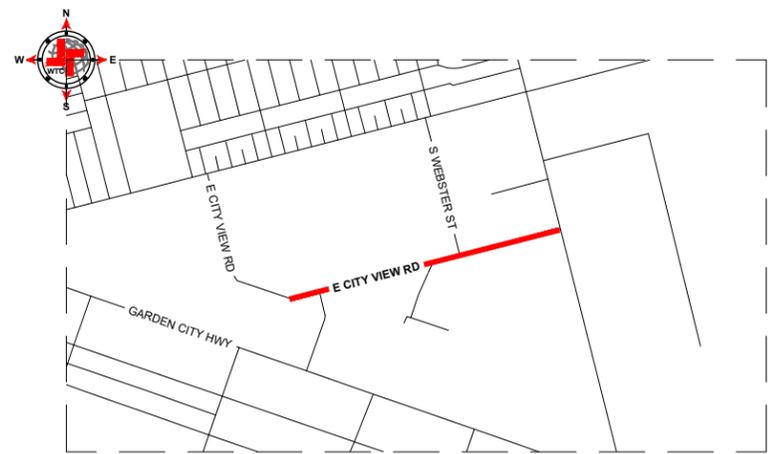

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

E CITY VIEW RD QUANTITIES			
ITEM #	ITEM	QTY.	UNIT
1	TWO-COURSE SEAL COAT (APPROX.)	8,273	SY
2	STRIPING	2,885	LF
3	SOLID WHITE EDGE LINES	5,770	LF
WORK BY OTHERS			
ITEM #	ITEM	QTY.	UNIT
1	POTHOLE REPAIR (BY OTHERS)	90.8	SY
2	EDGE PATCHING (BY OTHERS)	104.0	SY

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM


MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
E CITY VIEW RD					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 100'	E-2.0

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND COUNTY PAVEMENT MAINTENANCE PROJECT\FIG. E-2.0 E-CITY VIEW RD.DWG DATE: 3/22/24 2:37 PM DCH/ECG

E INDUSTRIAL LP

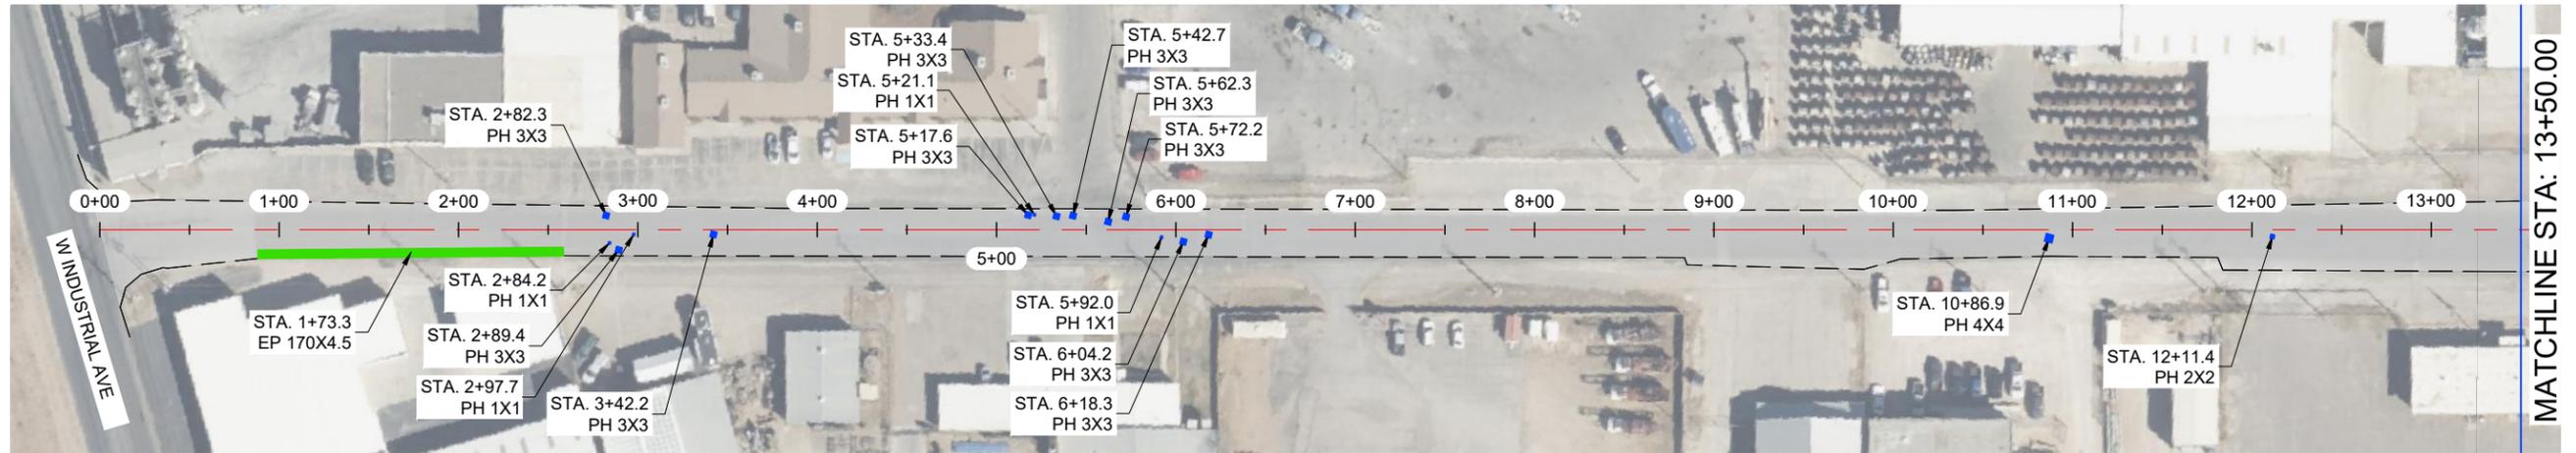


E INDUSTRIAL LP

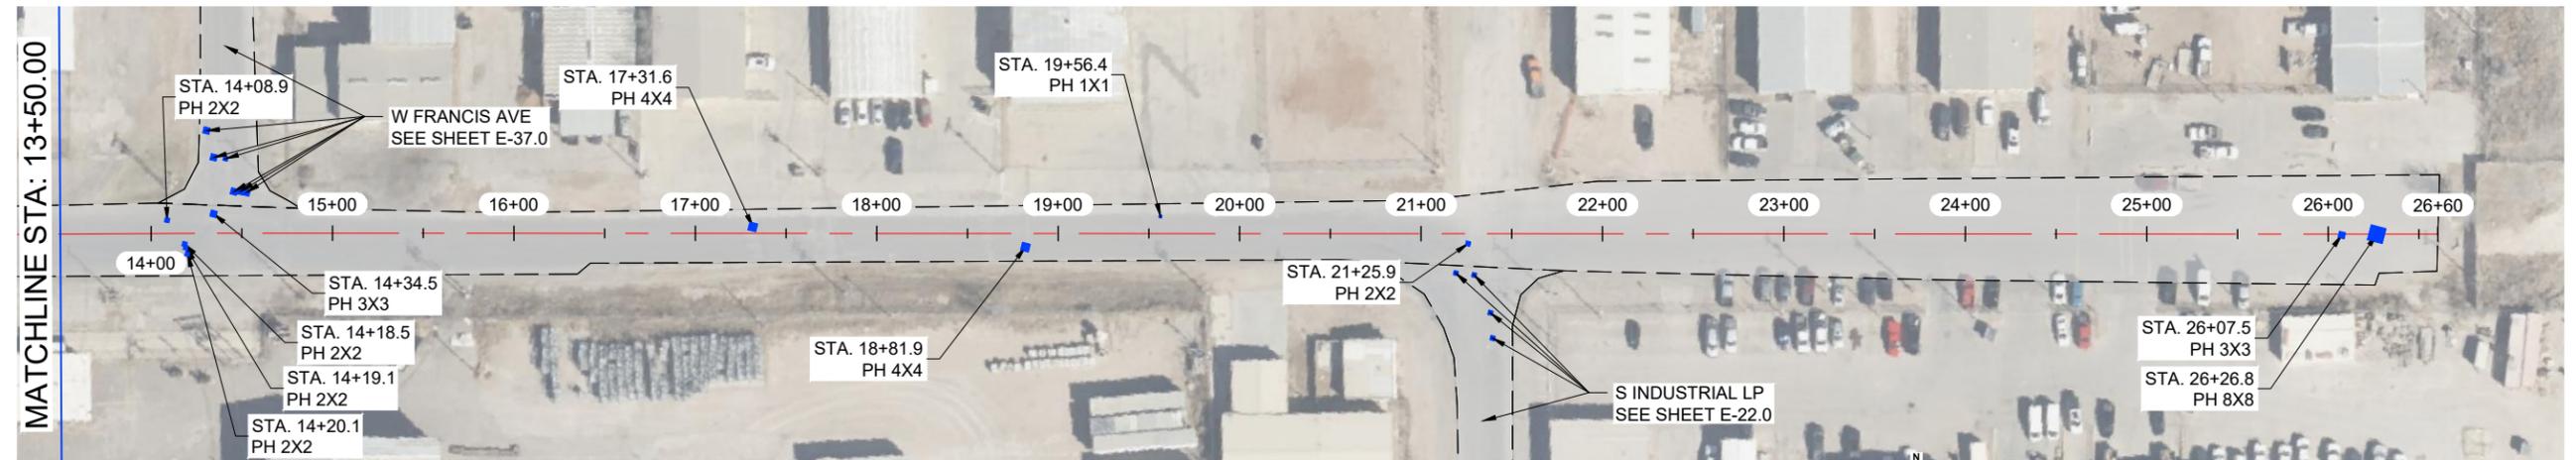

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

E INDUSTRIAL LP QUANTITIES			
ITEM #	ITEM	QTY.	UNIT
1	TWO-COURSE SEAL COAT (APPROX.)	10,521	SY
2	STRIPING	2,636	LF
3	SOLID WHITE EDGE LINES	5,272	LF
WORK BY OTHERS			
ITEM #	ITEM	QTY.	UNIT
1	POTHOLE REPAIR (BY OTHERS)	27.1	SY
2	EDGE PATCHING (BY OTHERS)	85.0	SY

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
E INDUSTRIAL LP					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 100'	E-3.0


**ELWYN**

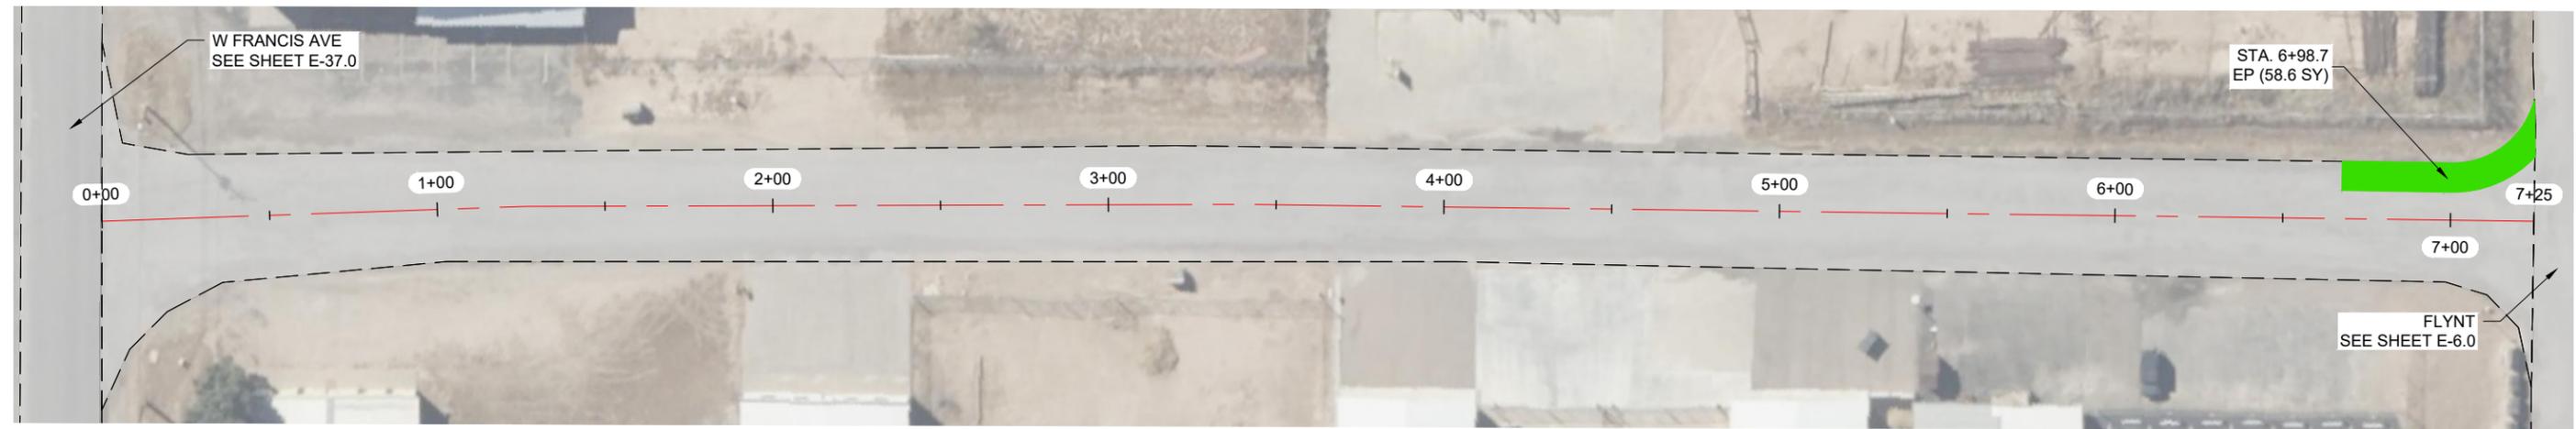


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS

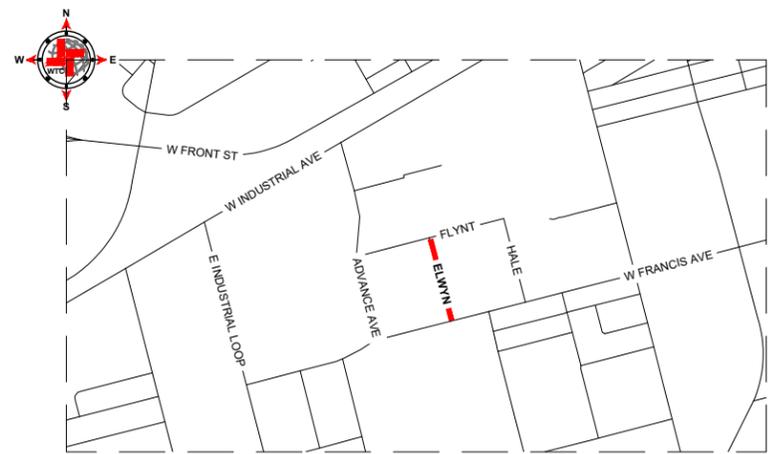

**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

ELWYN QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	2,875	SY	
2	STRIPING	675	LF	
3	SOLID WHITE EDGE LINES	1,350	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	-	SY	
2	EDGE PATCHING (BY OTHERS)	58.6	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
ELWYN						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 50'	E-4.0	

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND COUNTY PAVING\2024-03-DESIGN\65276 - DESIGN\65276 - DRAWINGS\2024\MIDLAND PAVEMENT MAINTENANCE PROJECT\FIG 1 LAYOUT TAB E-4.0 ELWYN.DWG 2024.03.28 09:08:00

**FAIRGROUNDS RD**

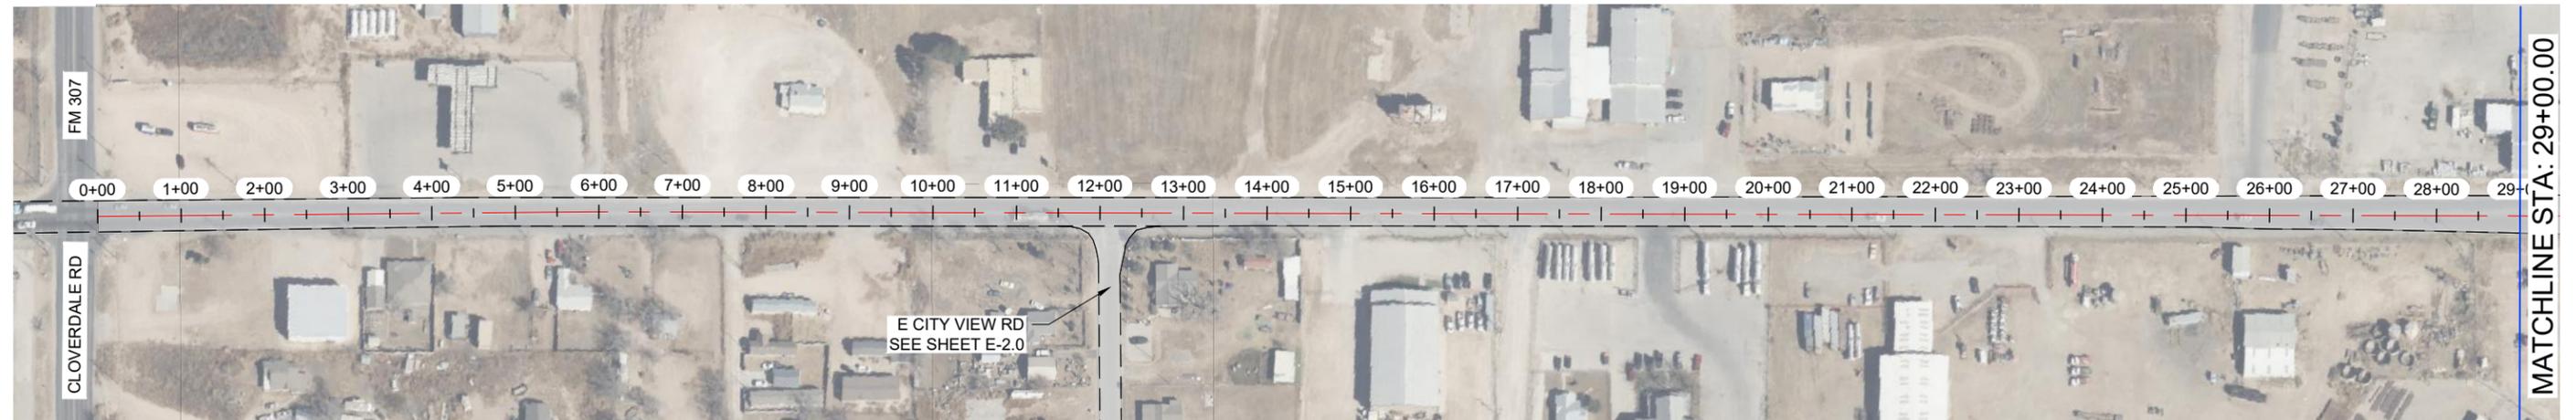



**FAIRGROUNDS RD**

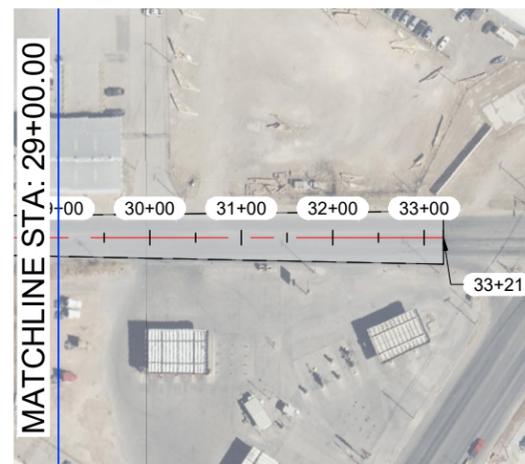

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS

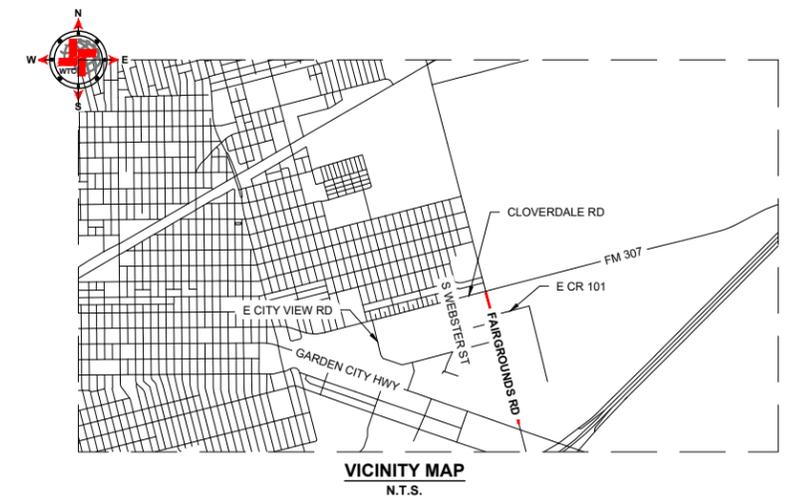

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

FAIRGROUNDS RD QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	13,856	SY	
2	STRIPING	3,297	LF	
3	SOLID WHITE EDGE LINES	6,594	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	-	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
FAIRGROUNDS RD						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 200'	E-5.0	

**FLYNT**

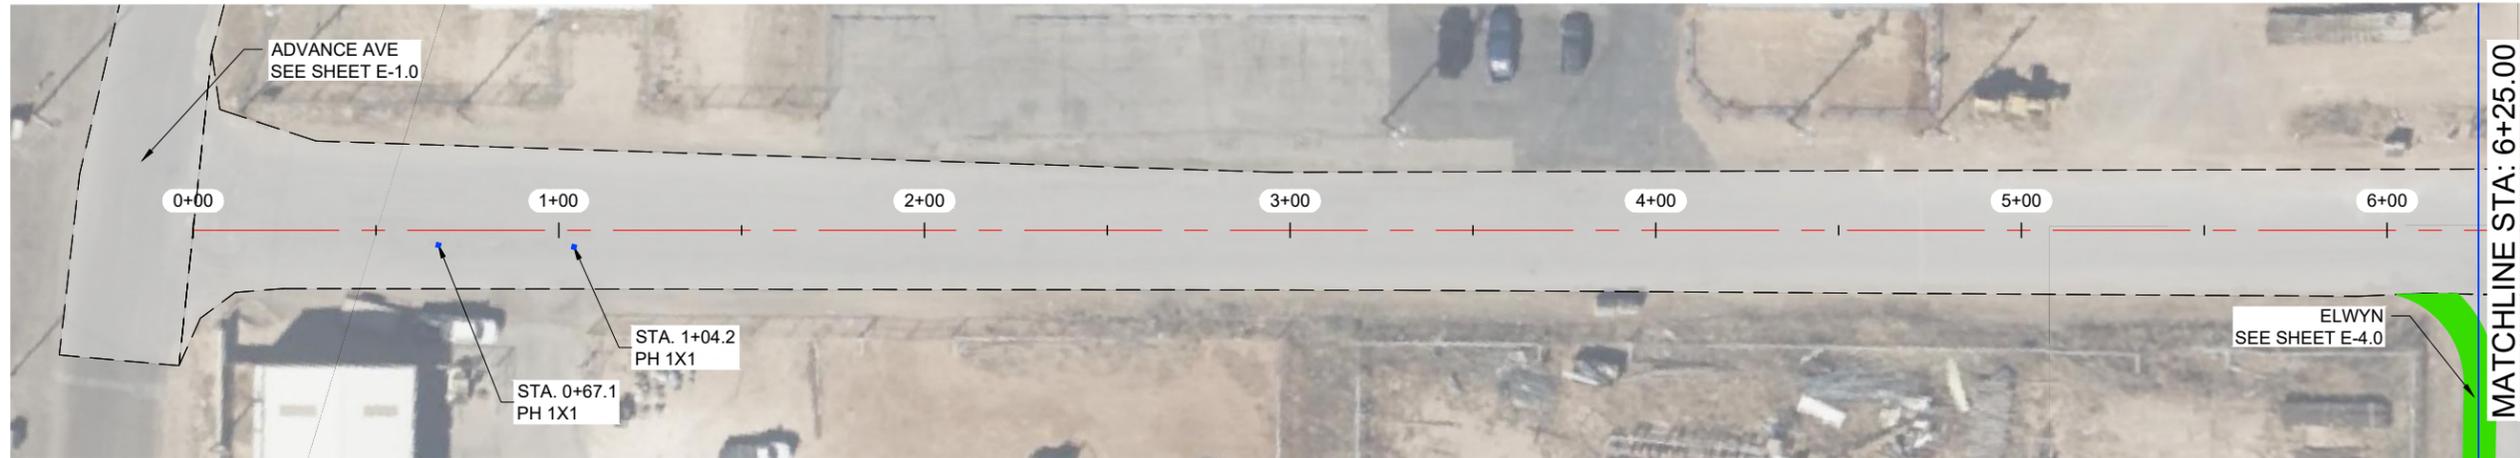


**FLYNT**

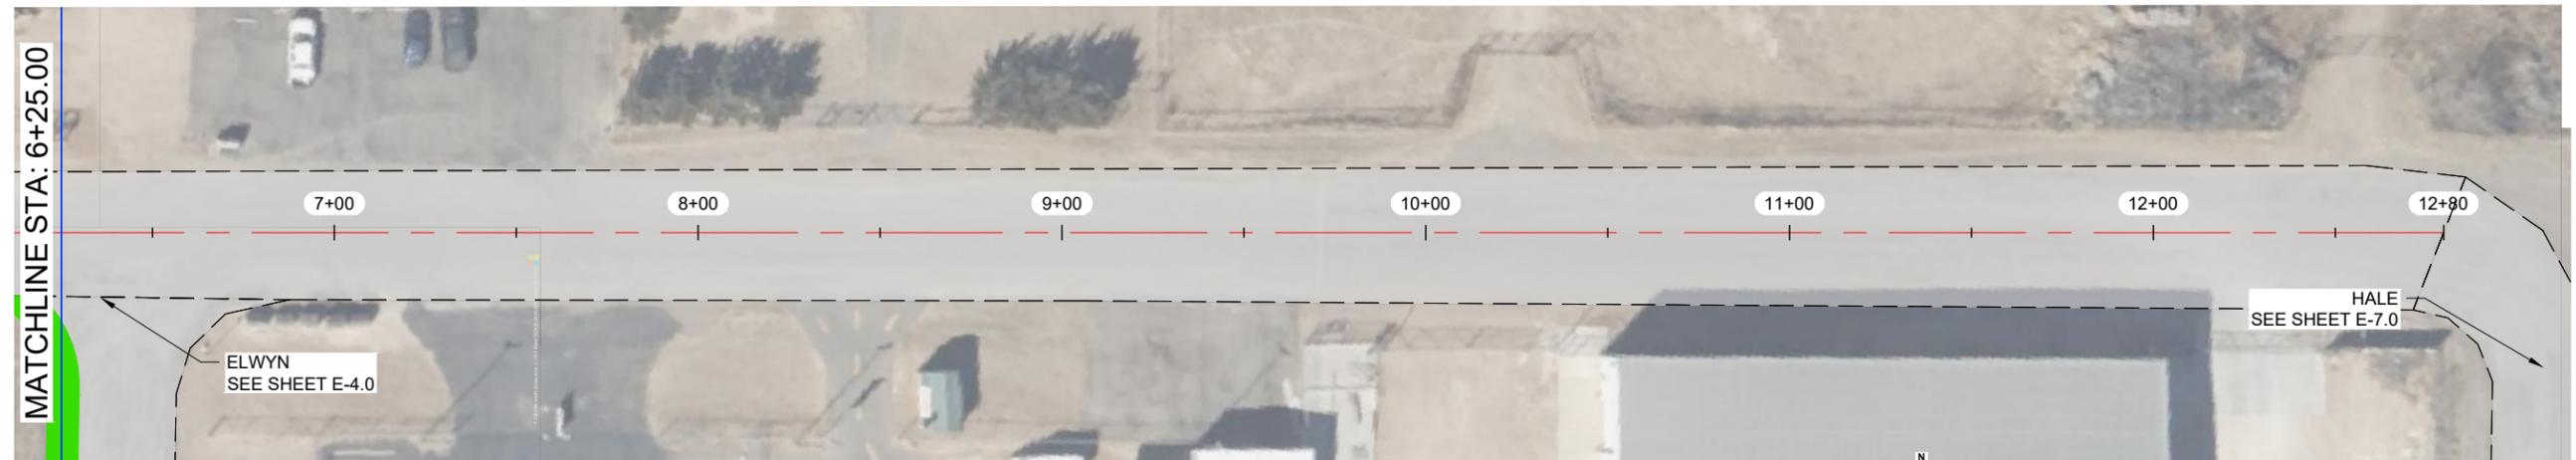

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

FLYNT QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5,129	SY	
2	STRIPING	1,255	LF	
3	SOLID WHITE EDGE LINES	2,510	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.2	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS


2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

FLYNT



DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 50'	E-6.0

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND COUNTY PAVEMENT MAINTENANCE PROJECT\FIG 1 LAYOUT TAB E-6.0.DWG (3/22/24) 2:59 PM SCHIEBER

HALE

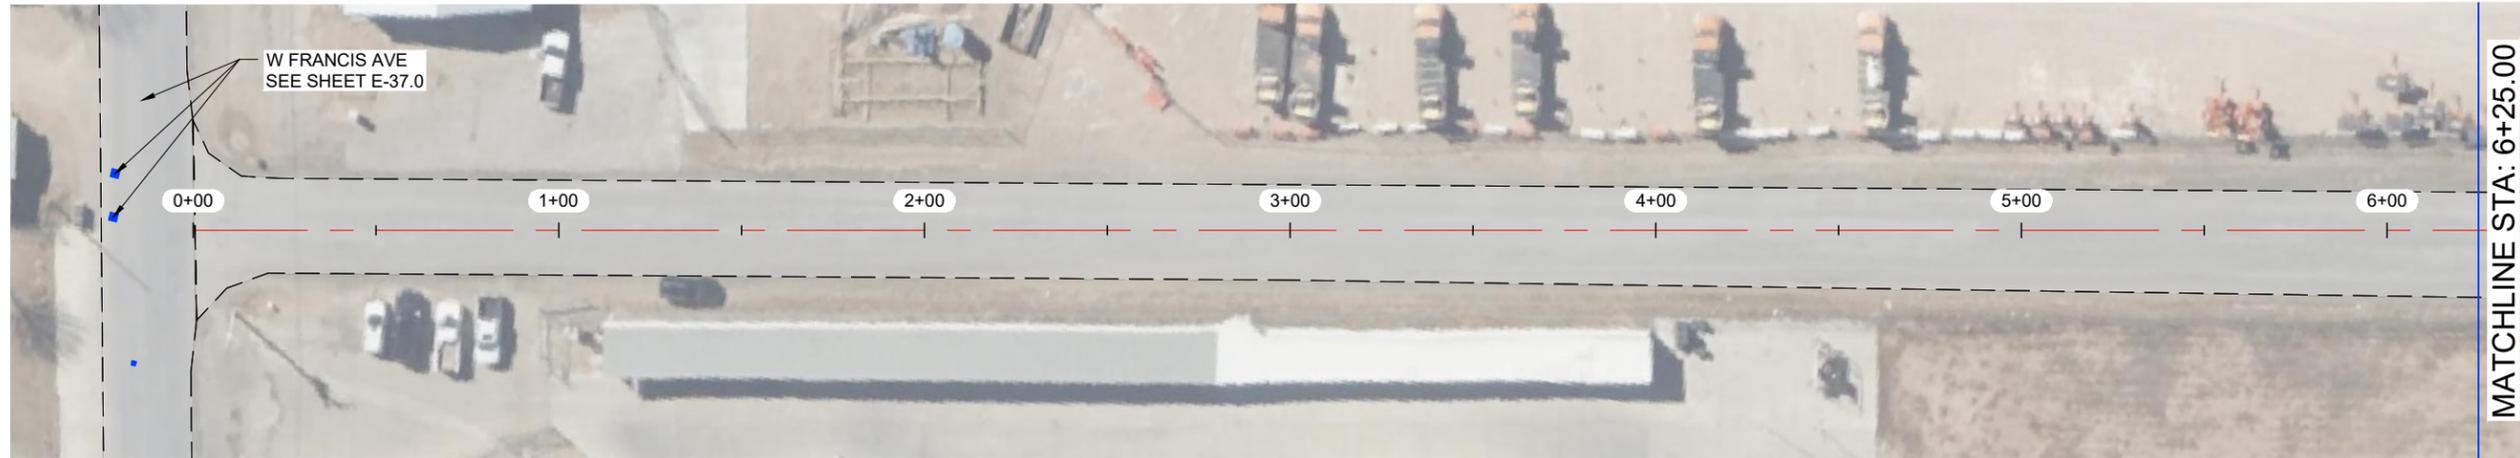


HALE

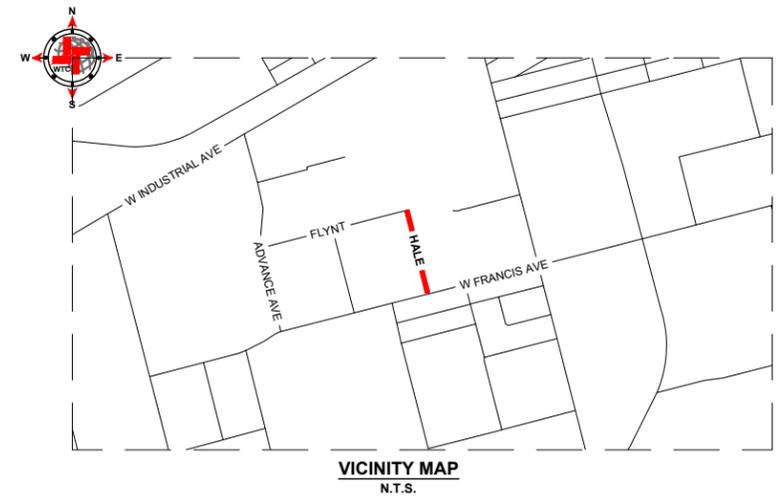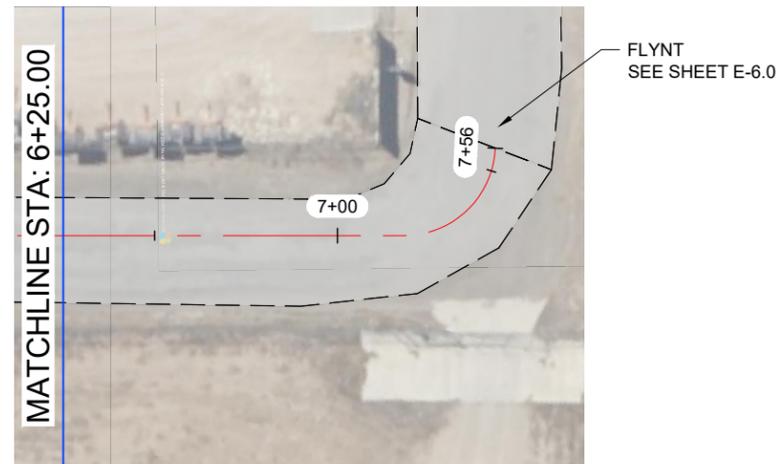

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

HALE QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	2,302	SY	
2	STRIPING	732	LF	
3	SOLID WHITE EDGE LINES	1,464	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	-	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
HALE						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 50'	E-7.0	

S CR 1192

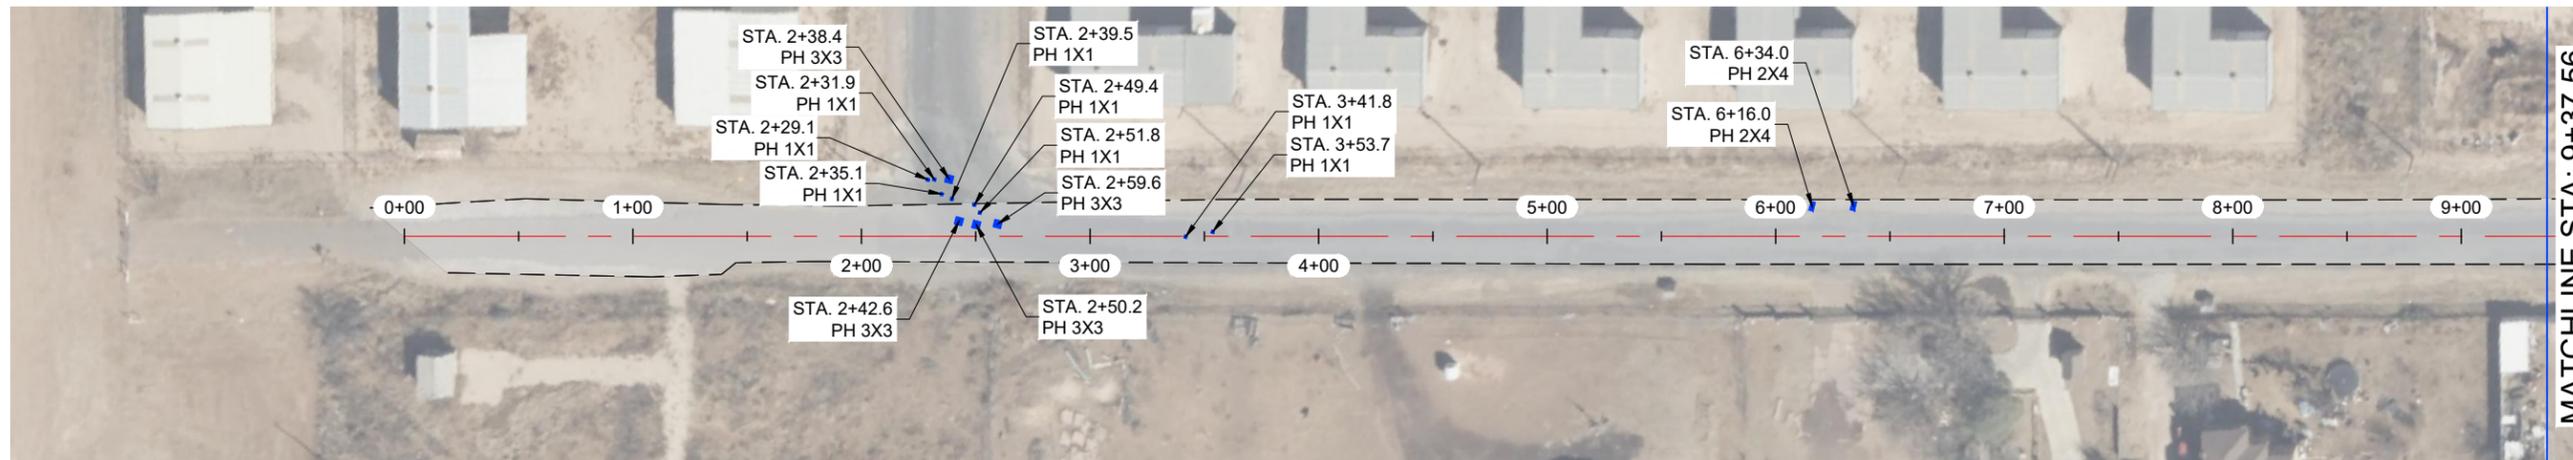



S CR 1192

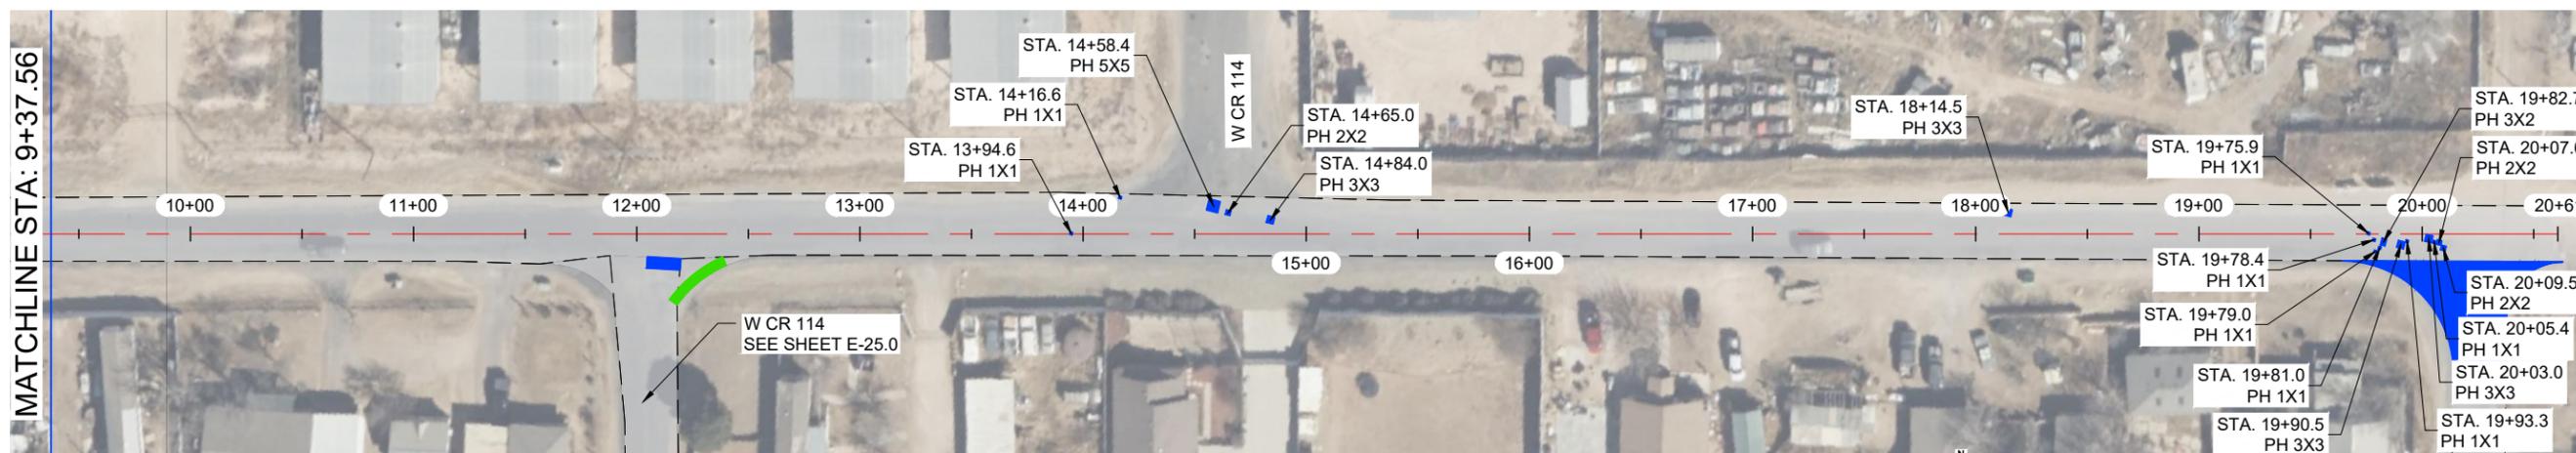

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS

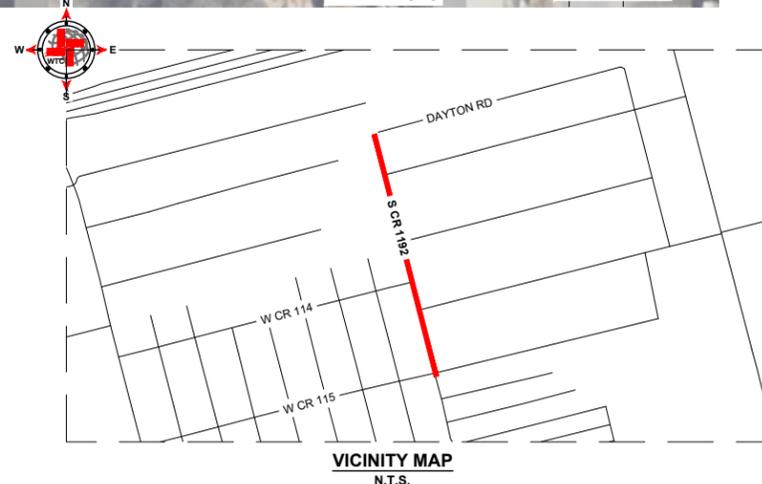

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S CR 1192 QUANTITIES			
ITEM #	ITEM	QTY.	UNIT
1	TWO-COURSE SEAL COAT (APPROX.)	6,239	SY
2	STRIPING	2,036	LF
3	SOLID WHITE EDGE LINES	4,072	LF
WORK BY OTHERS			
ITEM #	ITEM	QTY.	UNIT
1	POTHOLE REPAIR (BY OTHERS)	16.3	SY
2	EDGE PATCHING (BY OTHERS)	-	SY

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS

2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

S CR 1192

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 80'	E-8.0

PLAT. X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND COUNTY PAVEMENT MAINTENANCE PROJECT\FIG. 1-1-24\20240313.DWG  
 DRAWING: 20240313.MIDLAND COUNTY PAVEMENT MAINTENANCE PROJECT FIG. 1-1-24.TAB E-8.0 S CR 1192 20240313.DWG







**S CR 1195**





**S CR 1195**

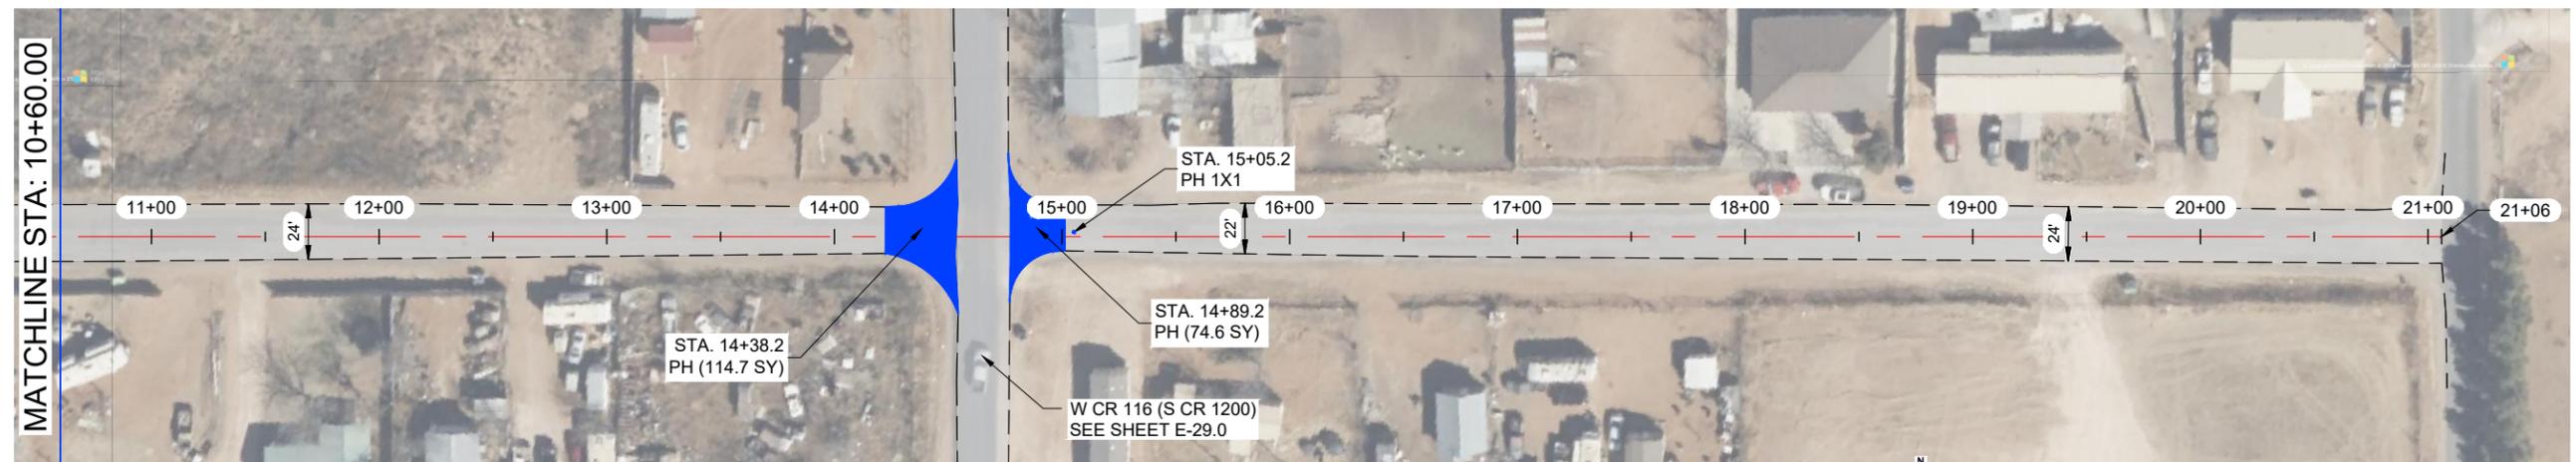

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS

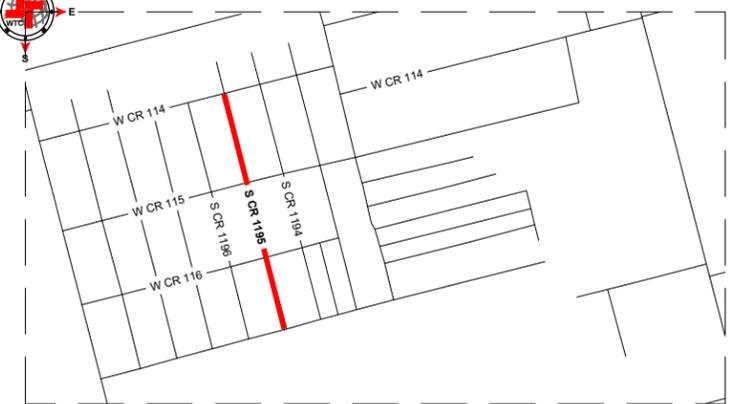

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S CR 1195 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5,543	SY	
2	STRIPING	2,056	LF	
3	SOLID WHITE EDGE LINES	-	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	578.6	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM

**MIDLAND COUNTY, TEXAS**

2024 MIDLAND PAVEMENT MAINTENANCE PROJECT


**S CR 1195**

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 80'	E-11.0

S CR 1196





S CR 1196

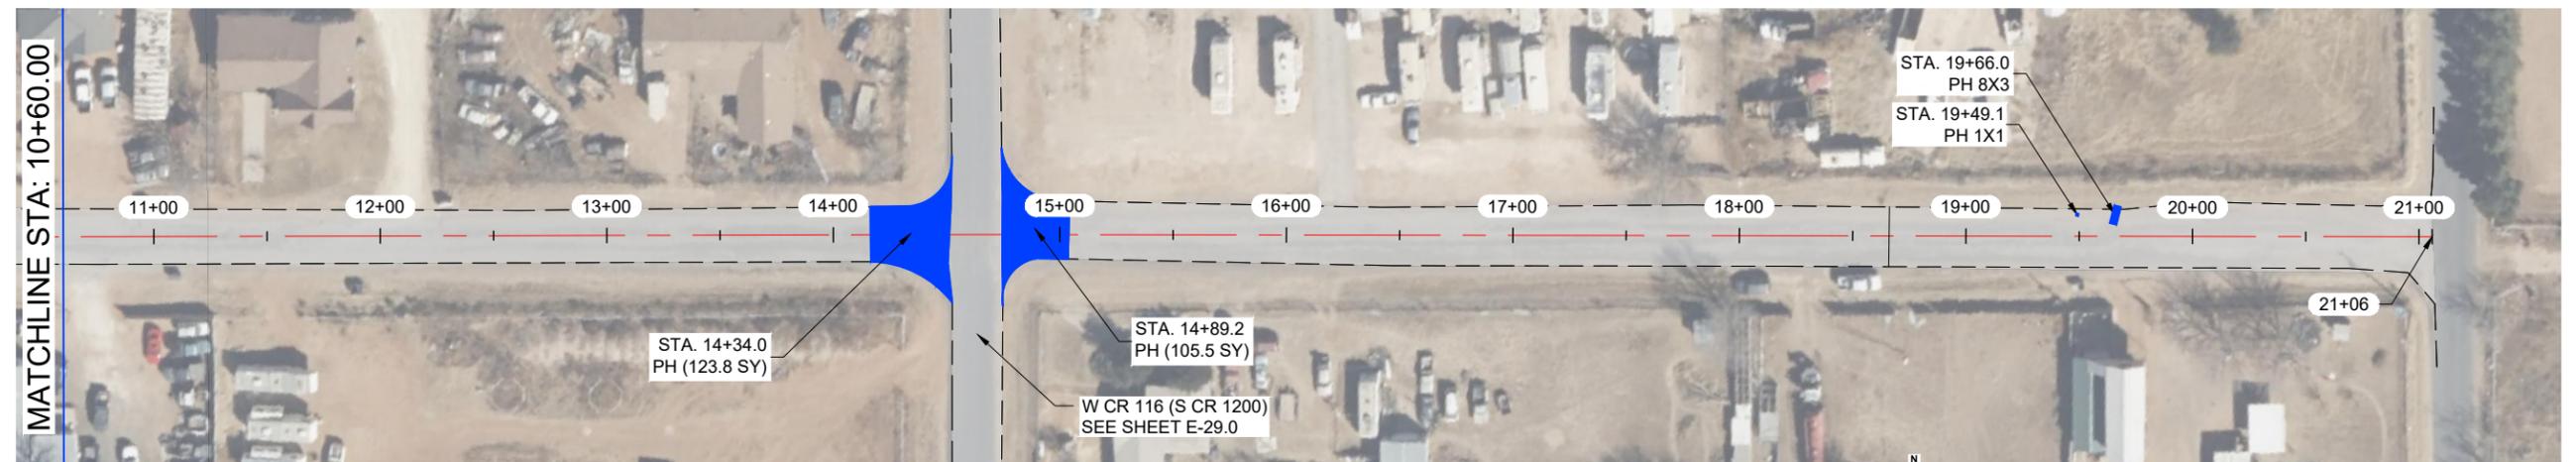

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS

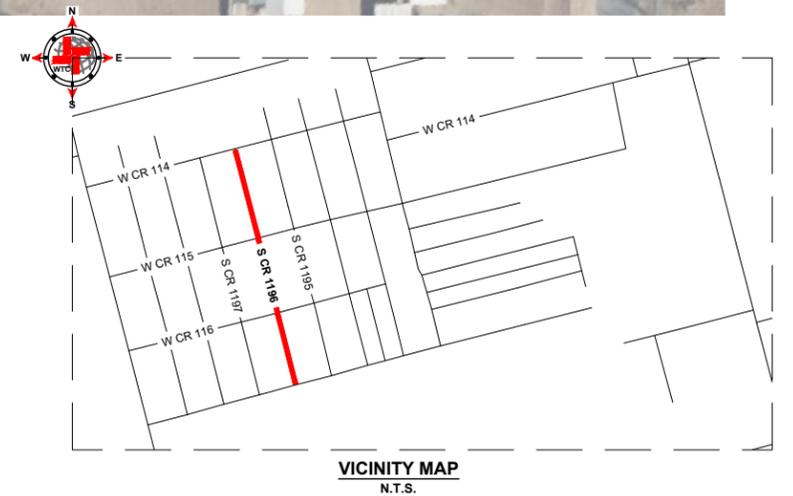

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S CR 1196 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	6,098	SY	
2	STRIPING	2,056	LF	
3	SOLID WHITE EDGE LINES	4,112	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	546.4	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S CR 1196						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 80'	E-12.0	


DRAWING NO. 2024-0001 - 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT - PLAN LAYOUT - TAB. E-12.0 - S CR 1196 - 02/20/24 - 10:03 AM - CDR/BCB



S CR 1198




S CR 1198

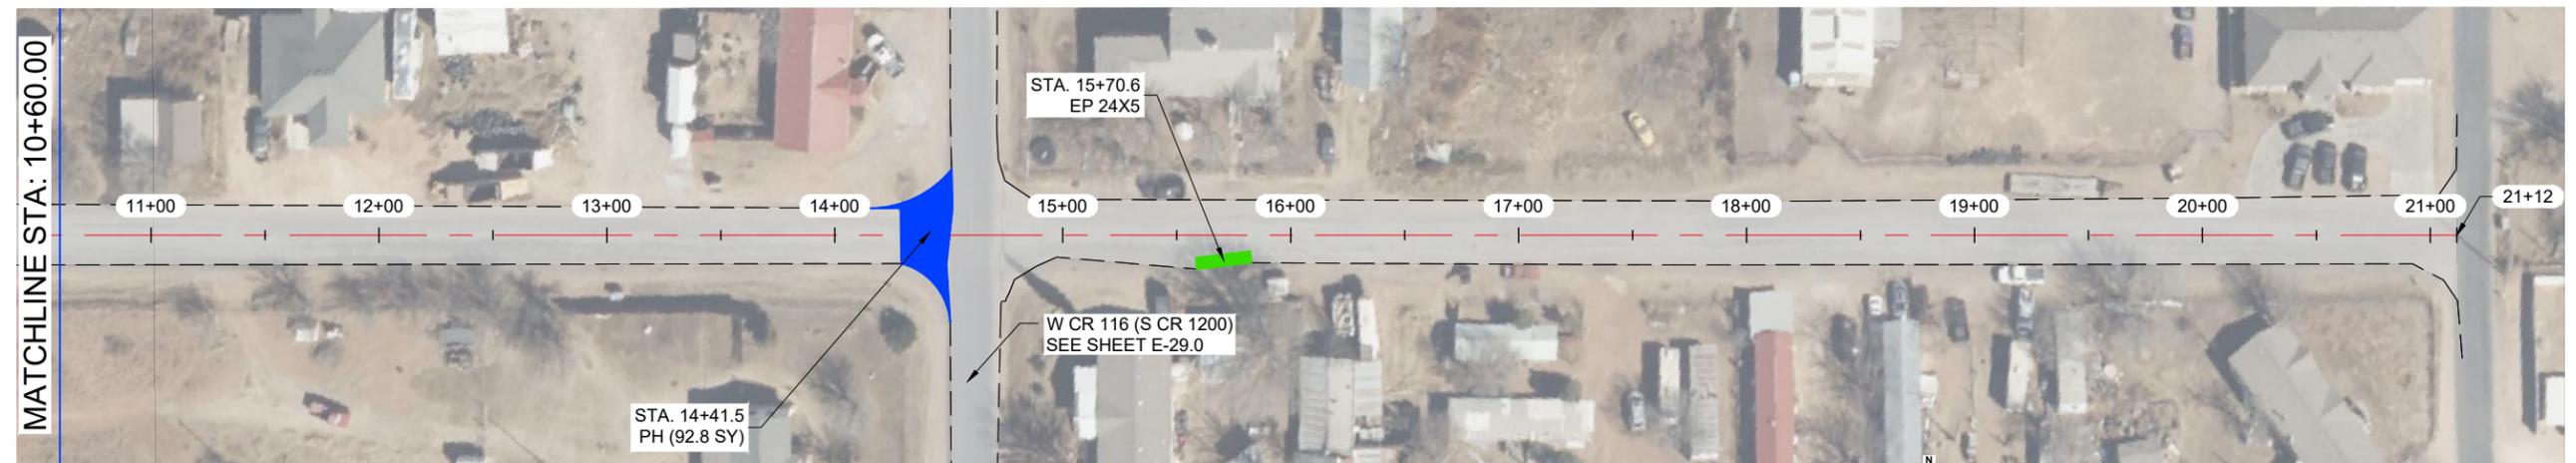


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS

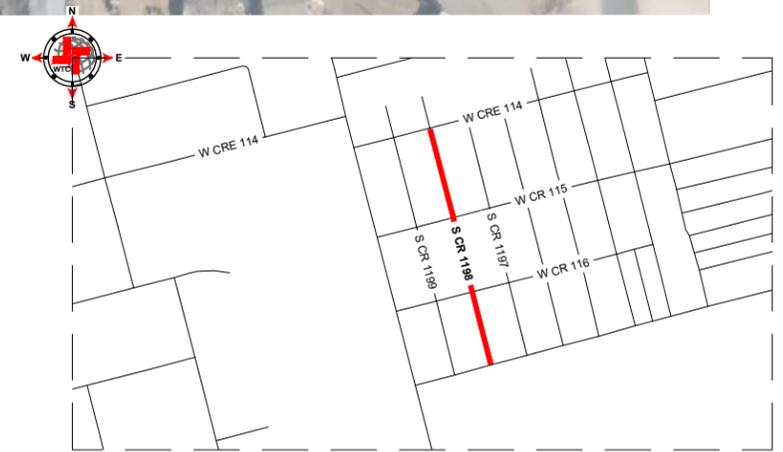

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S CR 1198 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	6,457	SY	
2	STRIPING	2,062	LF	
3	SOLID WHITE EDGE LINES	4,124	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	587.6	SY	
2	EDGE PATCHING (BY OTHERS)	13.4	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S CR 1198						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 80'	E-14.0	



DRAWING NO. 2024-001 AND PAVEMENT MAINTENANCE PROJECT LAYOUT TAB. E-14.0 S CR 1198-02/2024 J.C.T. PM/CH/EC




**S CR 1211**



**S CR 1211**

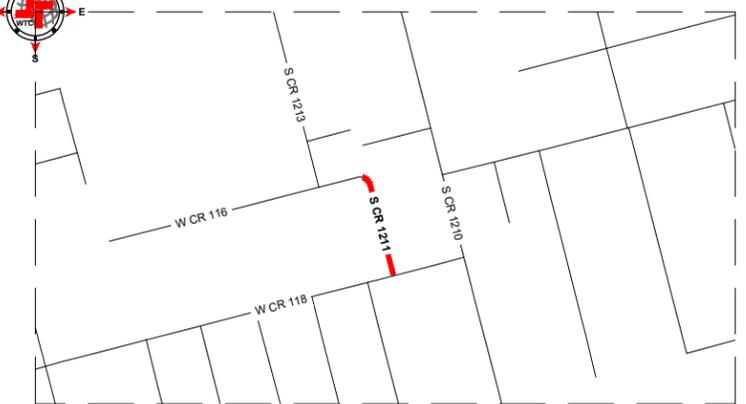

**VICINITY MAP**  
N.T.S.



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS

**LEGEND**

- EXISTING CENTER LINE
- EXISTING EDGE OF PAVEMENT
- SEAL COAT AREA
- POTHOLE REPAIR (AS NOTED)
- EDGE PATCHING (AS NOTED)

**S CR 1211 QUANTITIES**


ITEM #	ITEM	QTY.	UNIT
1	TWO-COURSE SEAL COAT (APPROX.)	2,188	SY
2	STRIPING	881	LF
3	SOLID WHITE EDGE LINES	-	LF
WORK BY OTHERS			
ITEM #	ITEM	QTY.	UNIT
1	POTHOLE REPAIR (BY OTHERS)	1.8	SY
2	EDGE PATCHING (BY OTHERS)	-	SY




**West Texas Consultants, Inc.**  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.




MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S CR 1211						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 50'	E-15.0	






S CR 1214

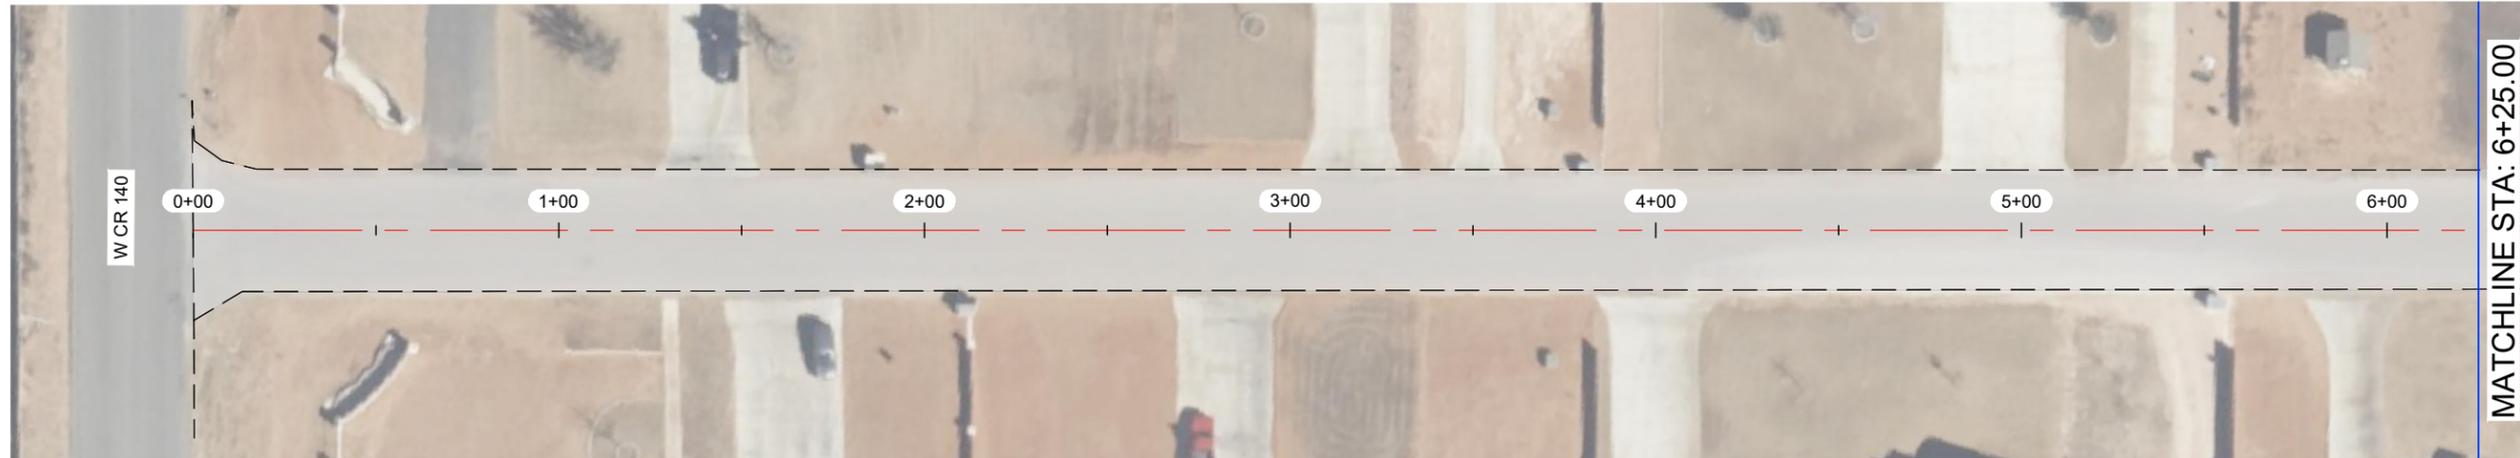



S CR 1214

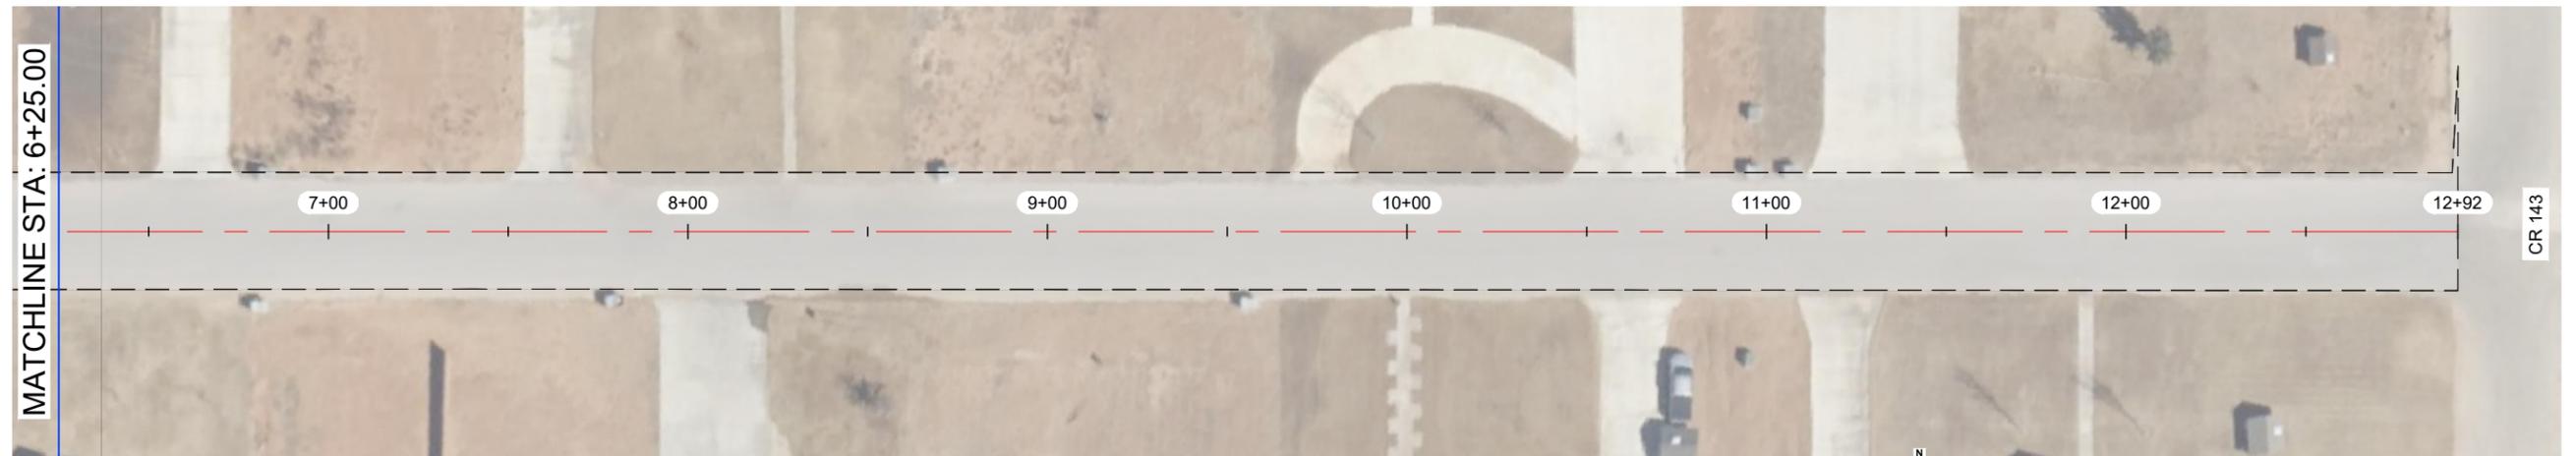

*J. Tompkins*  
 THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS

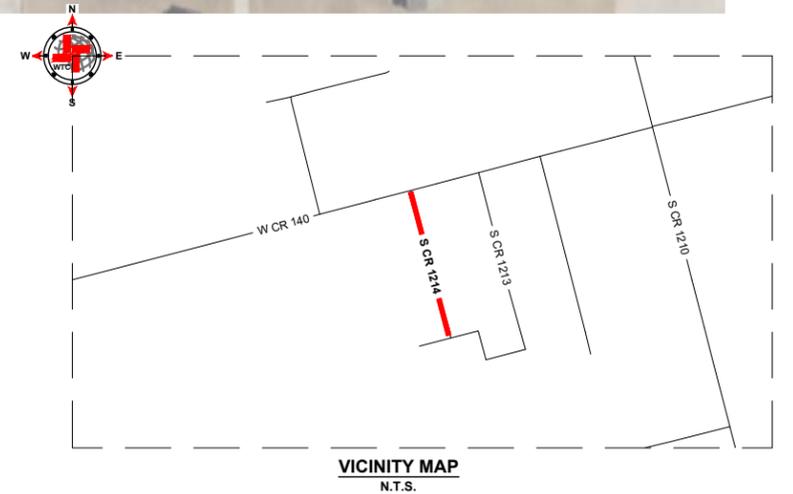

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S CR 1214 QUANTITIES			
ITEM #	ITEM	QTY.	UNIT
1	TWO-COURSE SEAL COAT (APPROX.)	4,713	SY
2	STRIPING	1,243	LF
3	SOLID WHITE EDGE LINES	2,486	LF
WORK BY OTHERS			
ITEM #	ITEM	QTY.	UNIT
1	POTHOLE REPAIR (BY OTHERS)	-	SY
2	EDGE PATCHING (BY OTHERS)	-	SY

**WTC**  
 ENGINEERS | SURVEYORS  
 West Texas Consultants, Inc.  
 ENGINEERS PLANNERS SURVEYORS  
 405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
 TEXAS REGISTERED ENGINEERING FIRM F-2746  
 TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE


LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
 CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
 STOP! CALL 1-800-245-4545  
 TOLL-FREE OSHA RULE 1926.651  
 REQUIRES PREVIOUS NOTIFICATION  
 TEXAS ONE CALL SYSTEM


MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
S CR 1214					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 50'	E-17.0

PLAT X: PROJECT ENGINEERING & SURVEYING TEXAS AND COUNTY FILING 2024-04-15 10:00 AM  
 DRAWINGS DIVISION 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB E-17.0 S CR 1214 2024.03.08 PM 02:00:00

**S CR 1215**

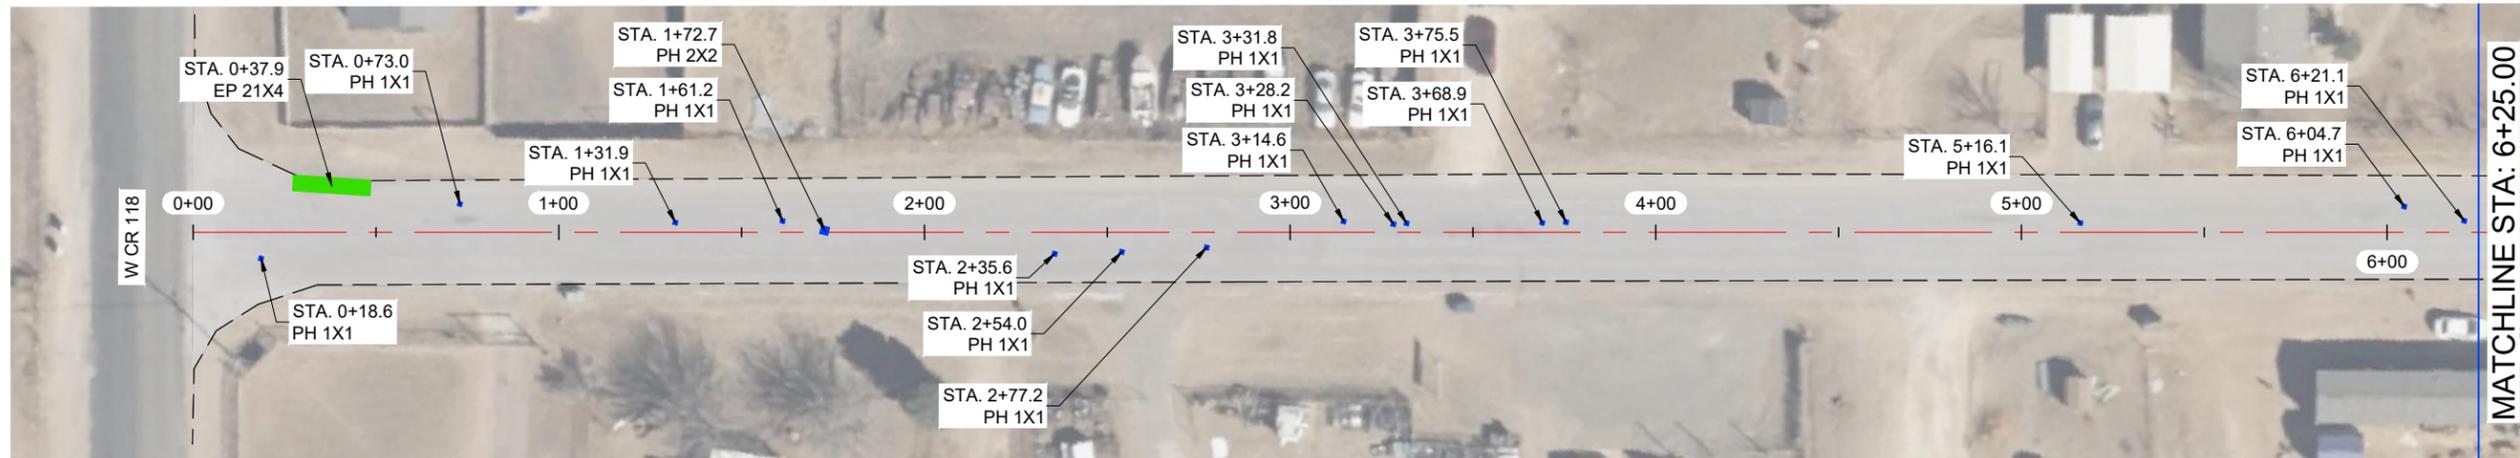

**S CR 1215**

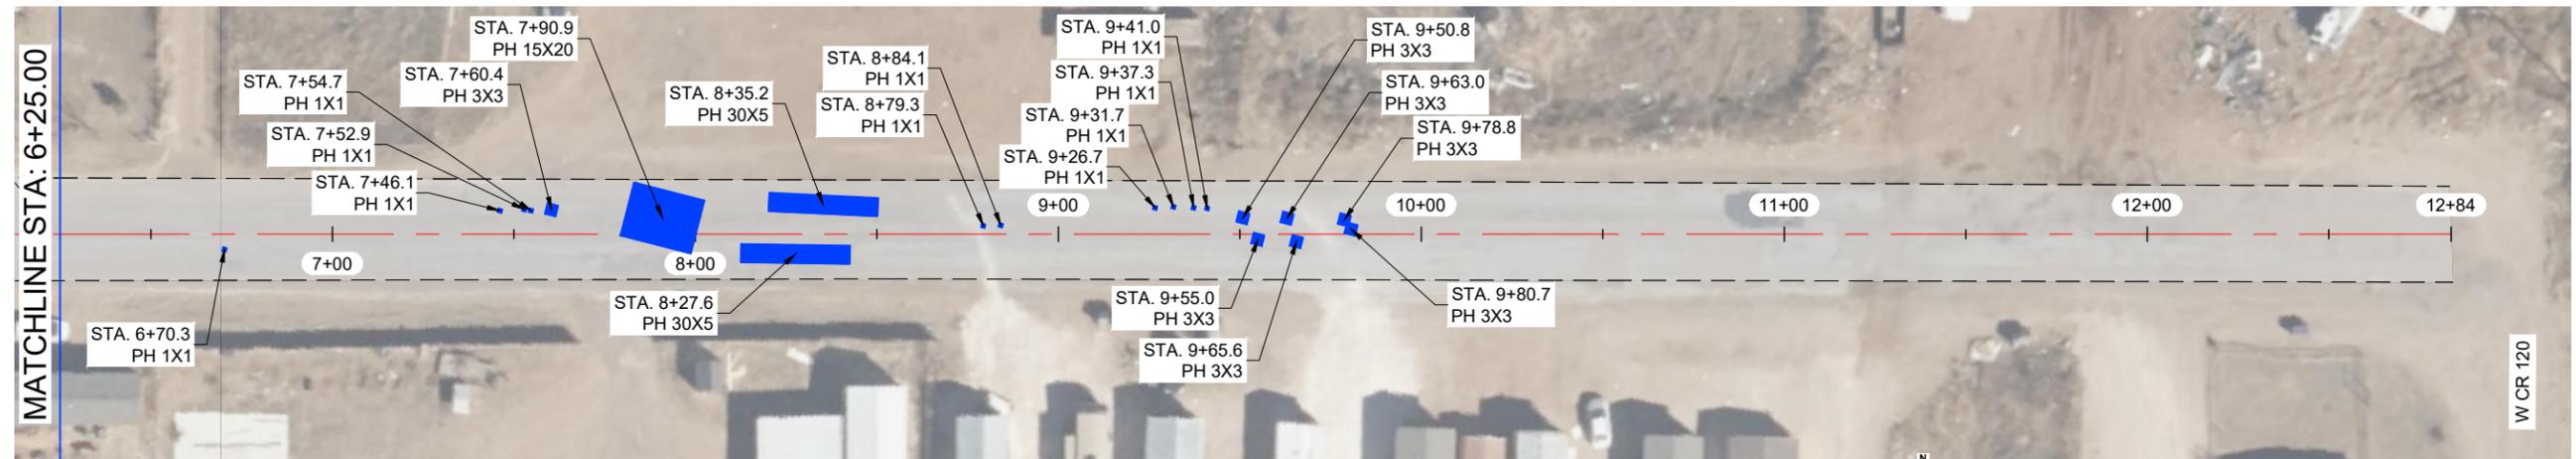


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S CR 1215 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	4,044	SY	
2	STRIPING	1,259	LF	
3	SOLID WHITE EDGE LINES	2,518	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	76.9	SY	
2	EDGE PATCHING (BY OTHERS)	9.4	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S CR 1215						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 50'	E-18.0	




PLAT. X: PROJECT ENGINEERING & SURVEYING TEXAS AND COUNTY FILING 2024-03-22 10:00 AM  
 DRAWING: 2024-03-22 10:00 AM  
 PROJECT: 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT  
 SHEET: E-18.0 OF 18



S CR 1218

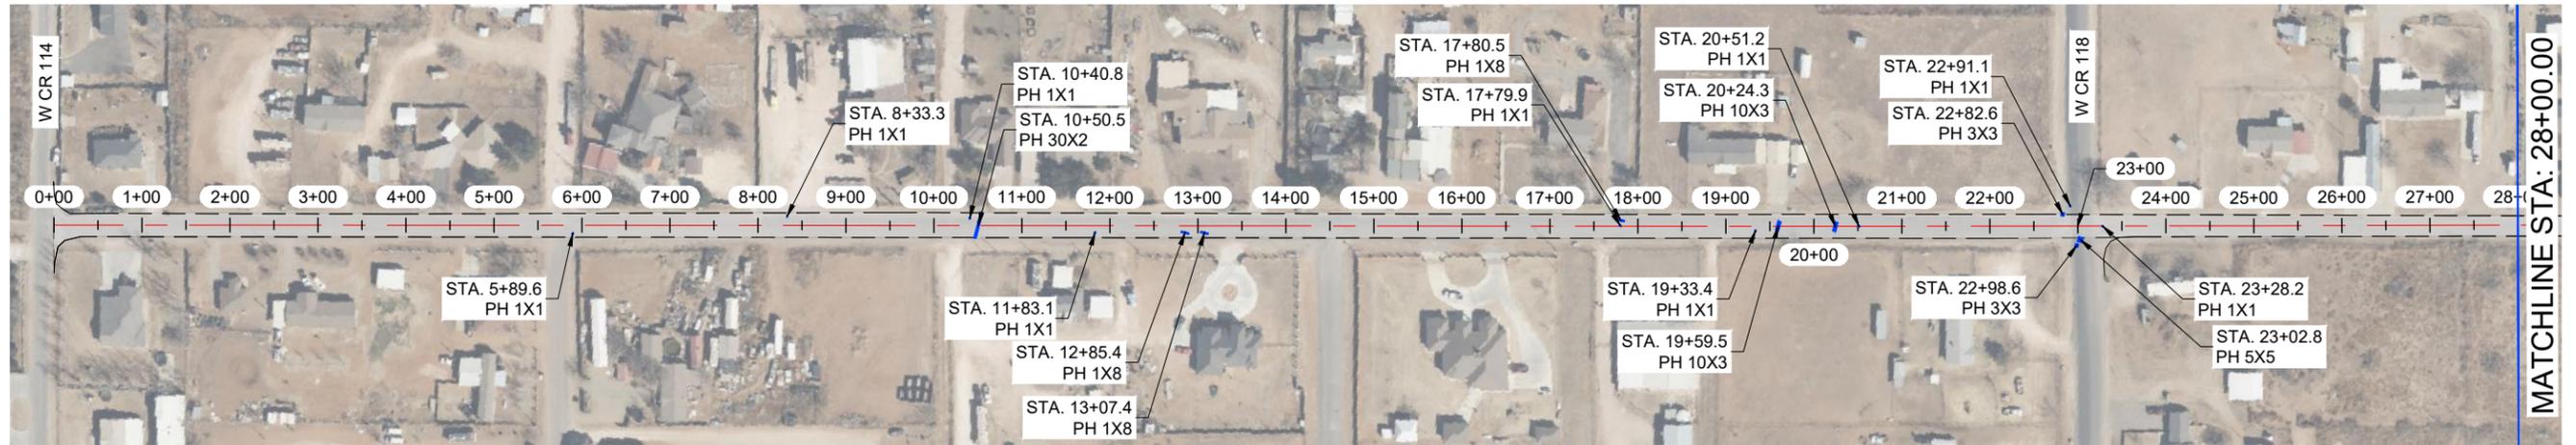


S CR 1218

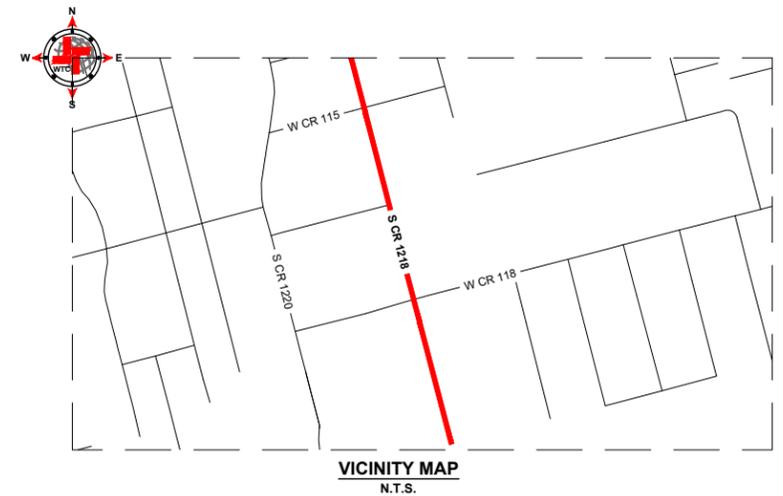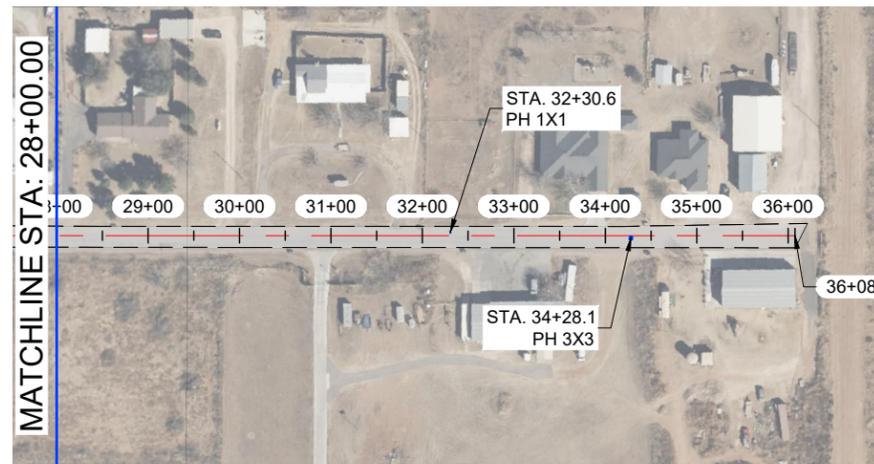

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S CR 1218 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	10,400	SY	
2	STRIPING	3,583	LF	
3	SOLID WHITE EDGE LINES	7,166	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	22.9	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545



TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S CR 1218						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 200'	E-20.0	



PLAT. X: PROJECT ENGINEERING & SURVEYING TEXAS AND COUNTY FILING 2024-04-15 10:00 AM - DRAWINGS DIVISION 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB. E-20.0 S CR 1218 2024.03.27 PM 02:05:28



**S CR 1220**

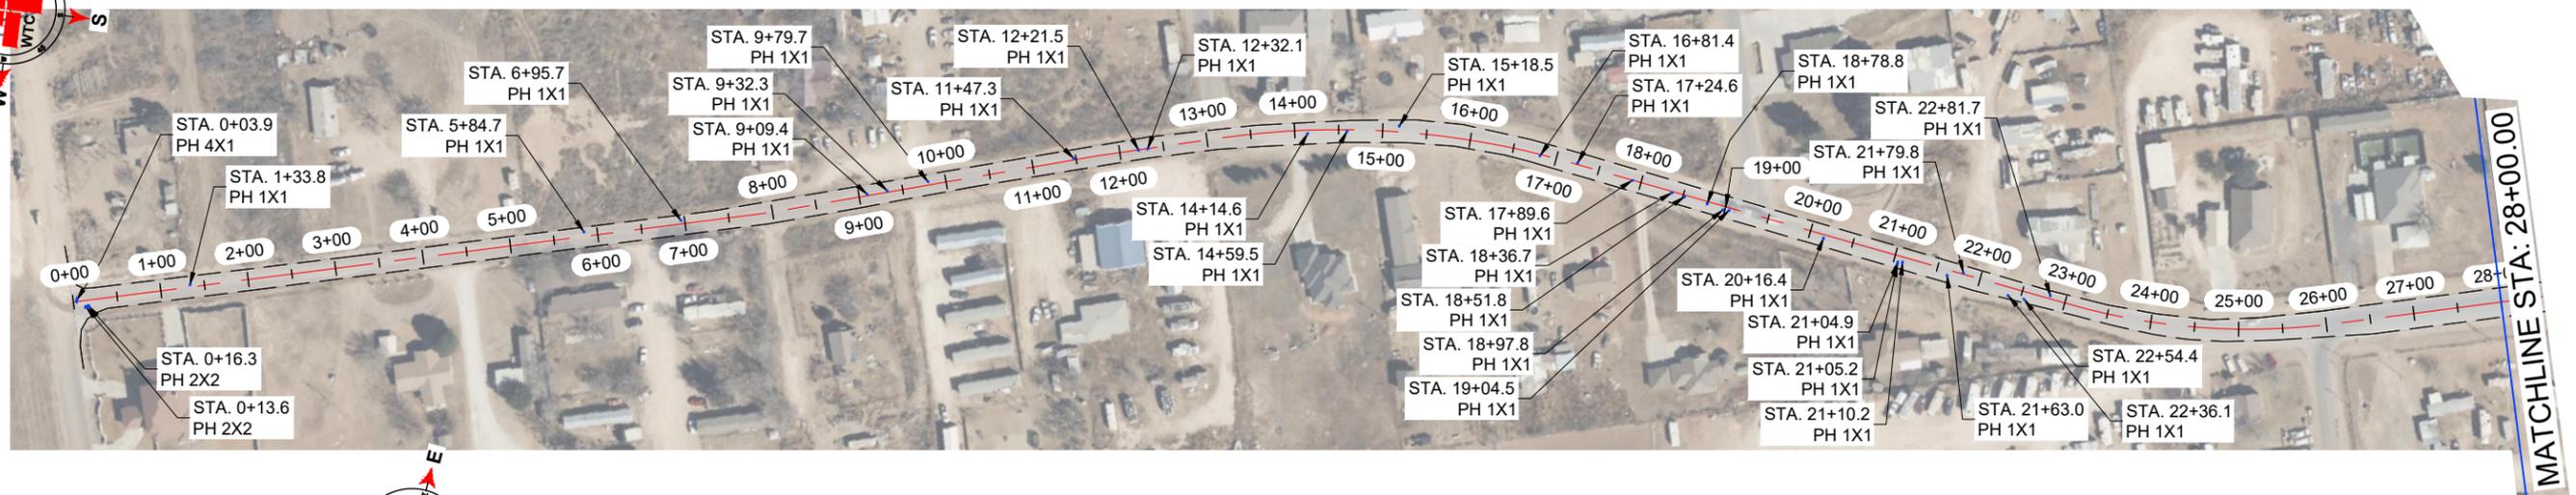

**S CR 1220**

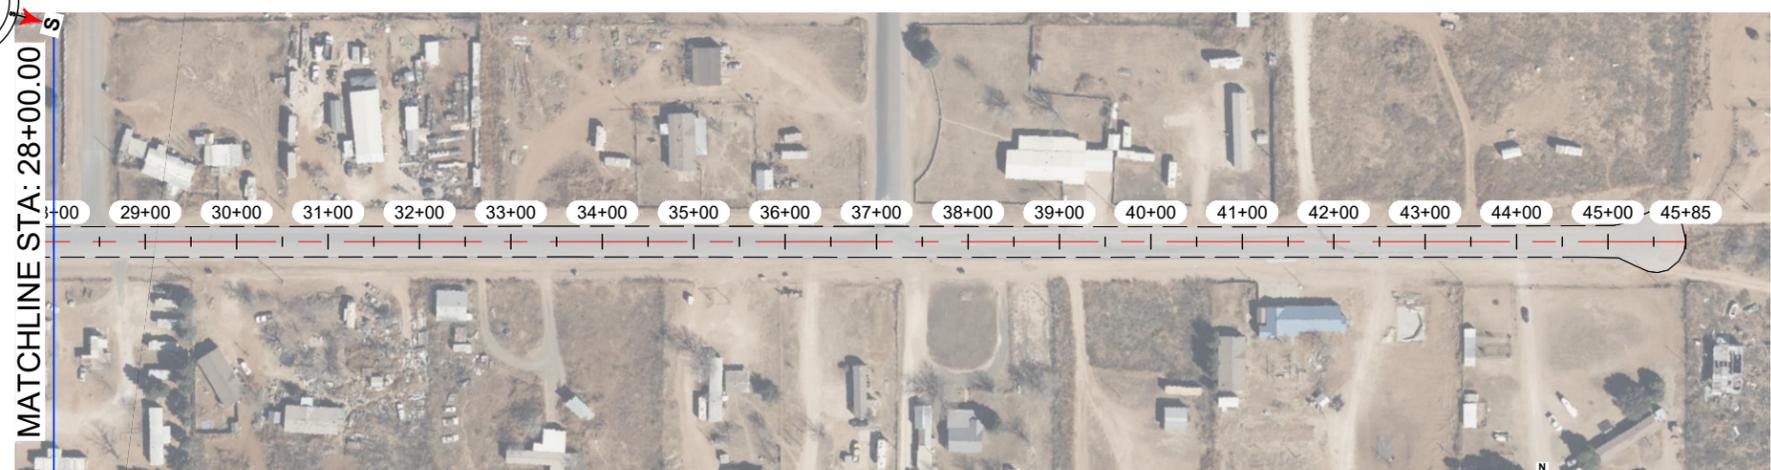


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



**VICINITY MAP**  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)


S CR 1220 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	14,470	SY	
2	STRIPING	4,475	LF	
3	SOLID WHITE EDGE LINES	8,950	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	4.6	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00


REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY. CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.






MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S CR 1220						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 200'	E-21.0	

**S INDUSTRIAL LP (GIST RD)**

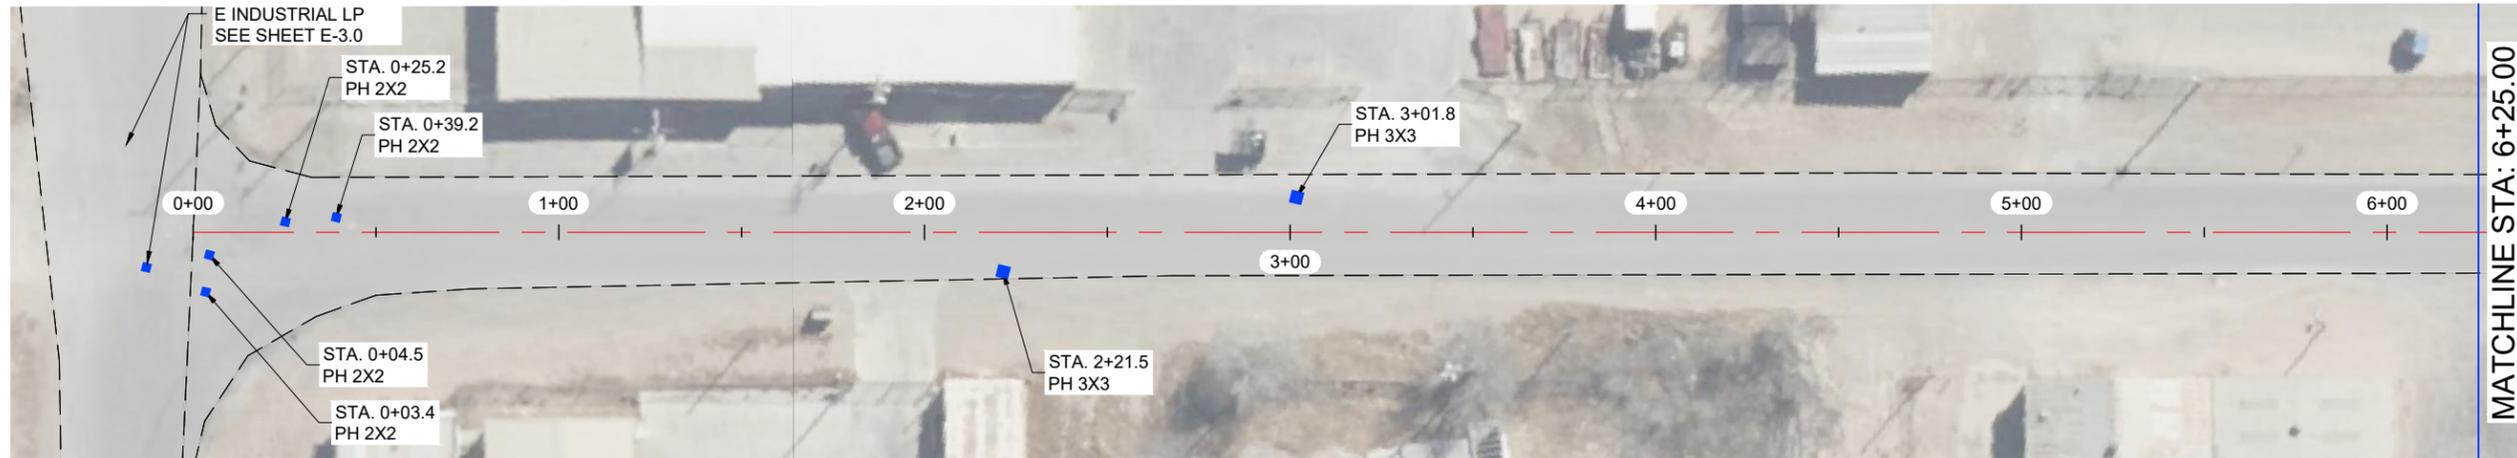


**S INDUSTRIAL LP (GIST RD)**

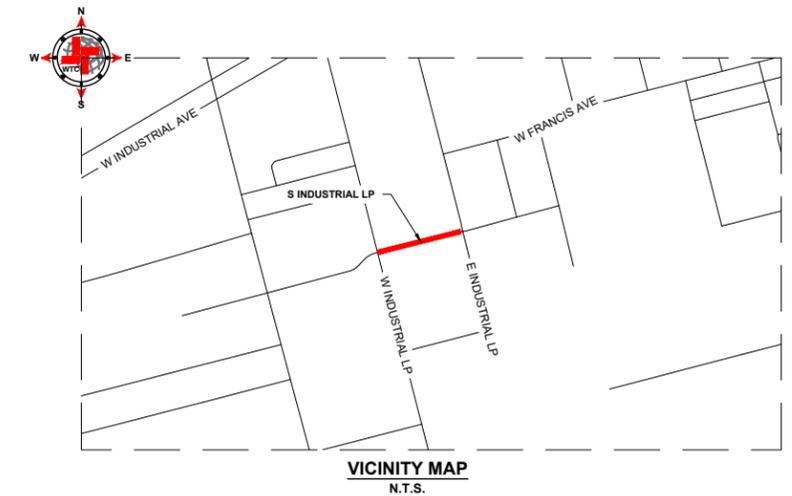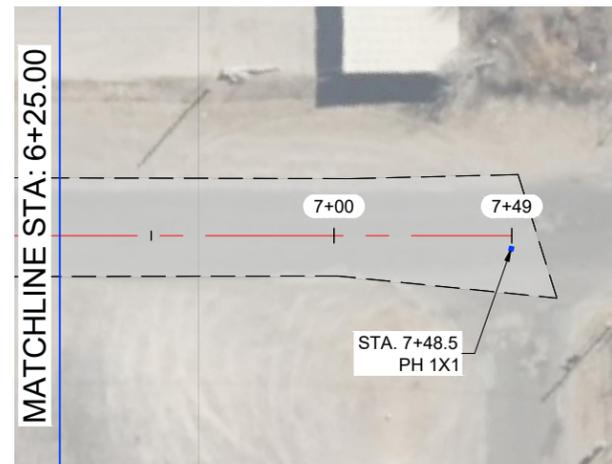

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

S INDUSTRIAL LP QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	2,498	SY	
2	STRIPING	724	LF	
3	SOLID WHITE EDGE LINES	1,448	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	3.9	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM


MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
S INDUSTRIAL LP						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 50'	E-22.0	

PLAT. X: PROJECT ENGINEERING & SURVEYING TEXAS AND COUNTY FILING 2024 - DESIGN 0678 - DRAWINGS DIVISION 2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PICT LAYOUT TAB. E-22.0 S INDUSTRIAL LP 2/22/24 3:08 PM CONJEDCS






W CR 114

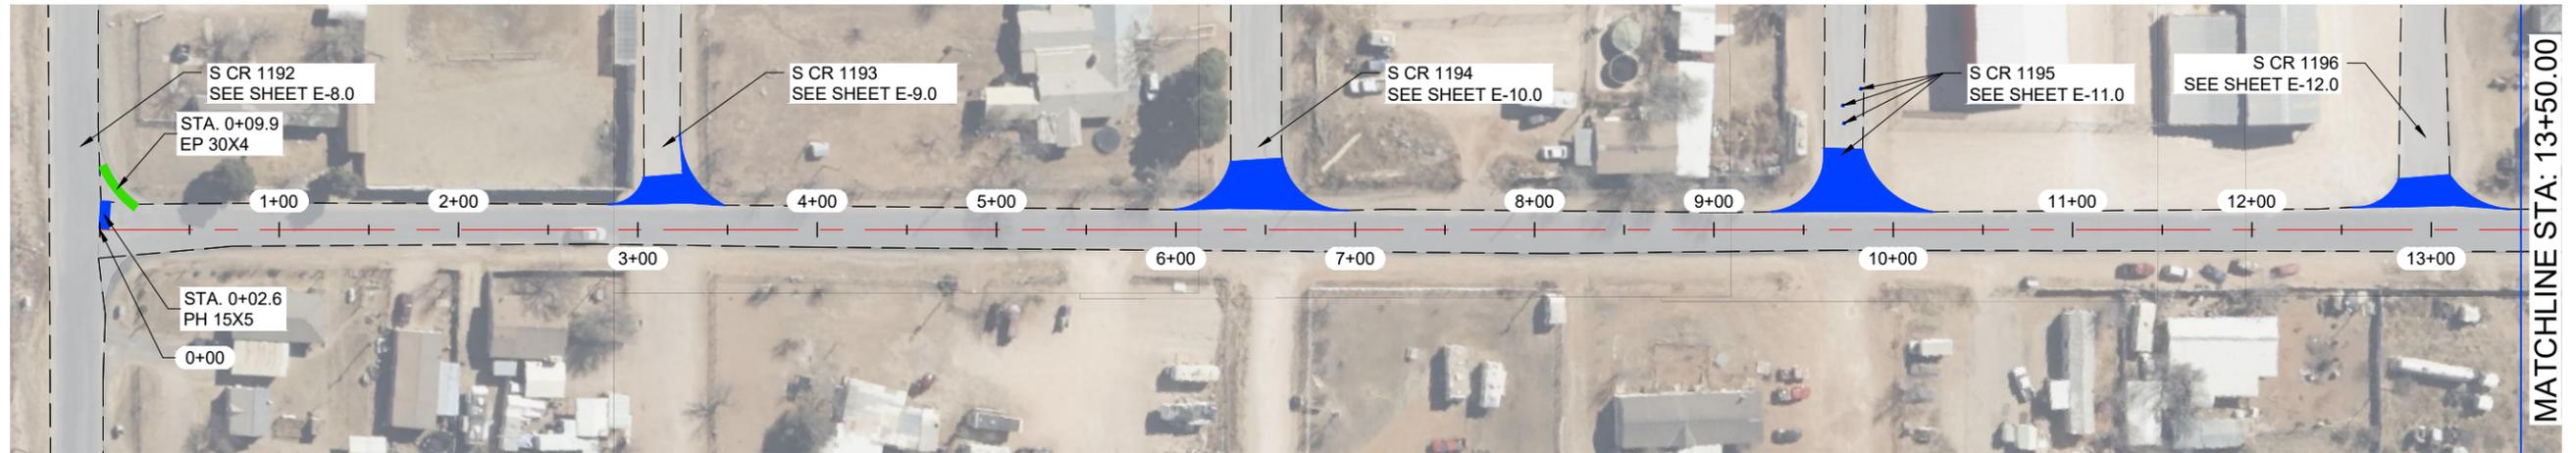


W CR 114

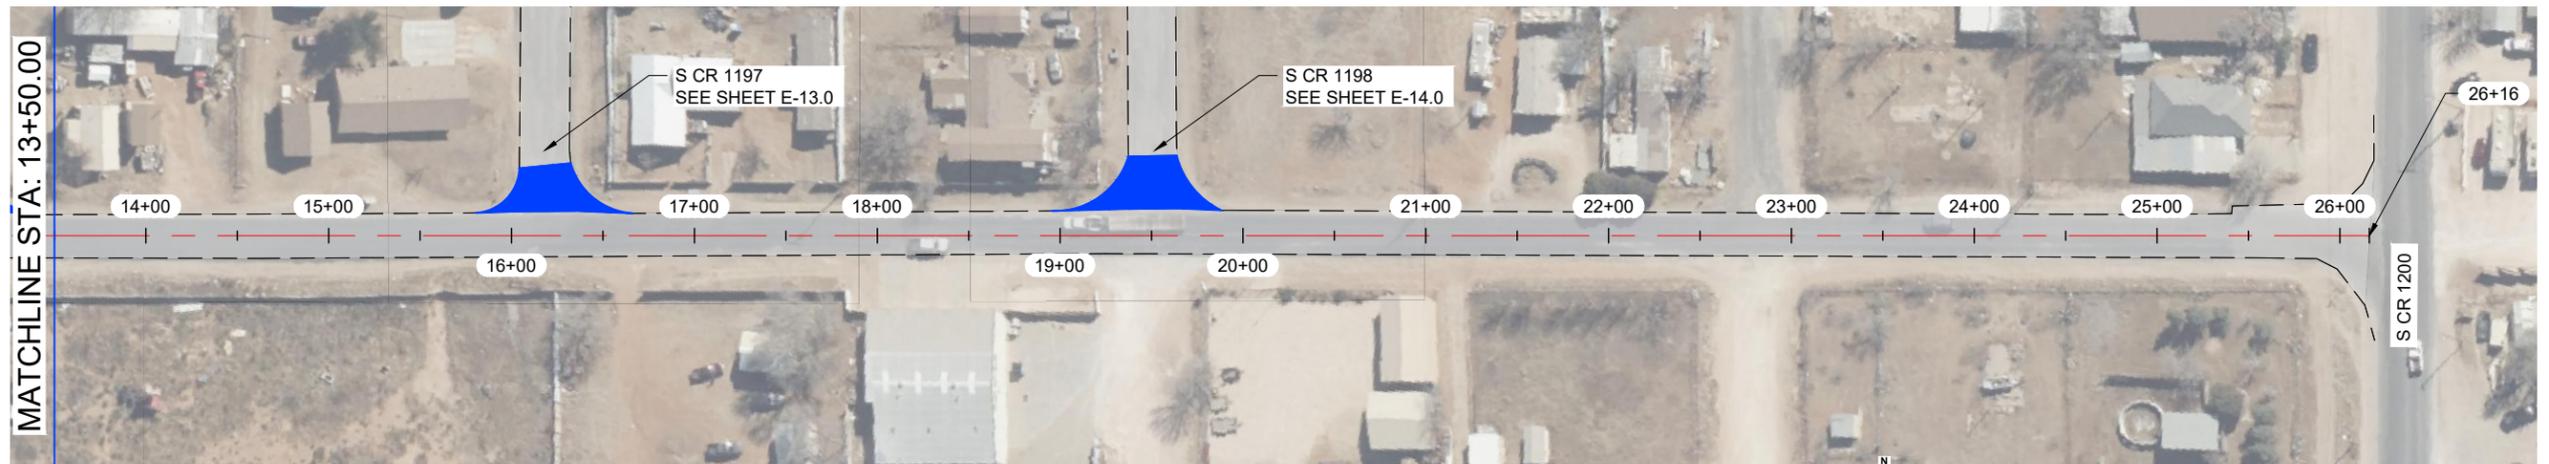

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W CR 114 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	6,949	SY	
2	STRIPING	2,567	LF	
3	SOLID WHITE EDGE LINES	5,134	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	8.4	SY	
2	EDGE PATCHING (BY OTHERS)	13.4	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545


TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
W CR 114						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 100'	E-25.0	


PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND COUNTY PAVEMENT MAINTENANCE PROJECT\FIG 1 LAYOUT TAB E-25.0\WCR114-20240324-11.PLM.CHG.BC03



W CR 115 (S CR 1200)

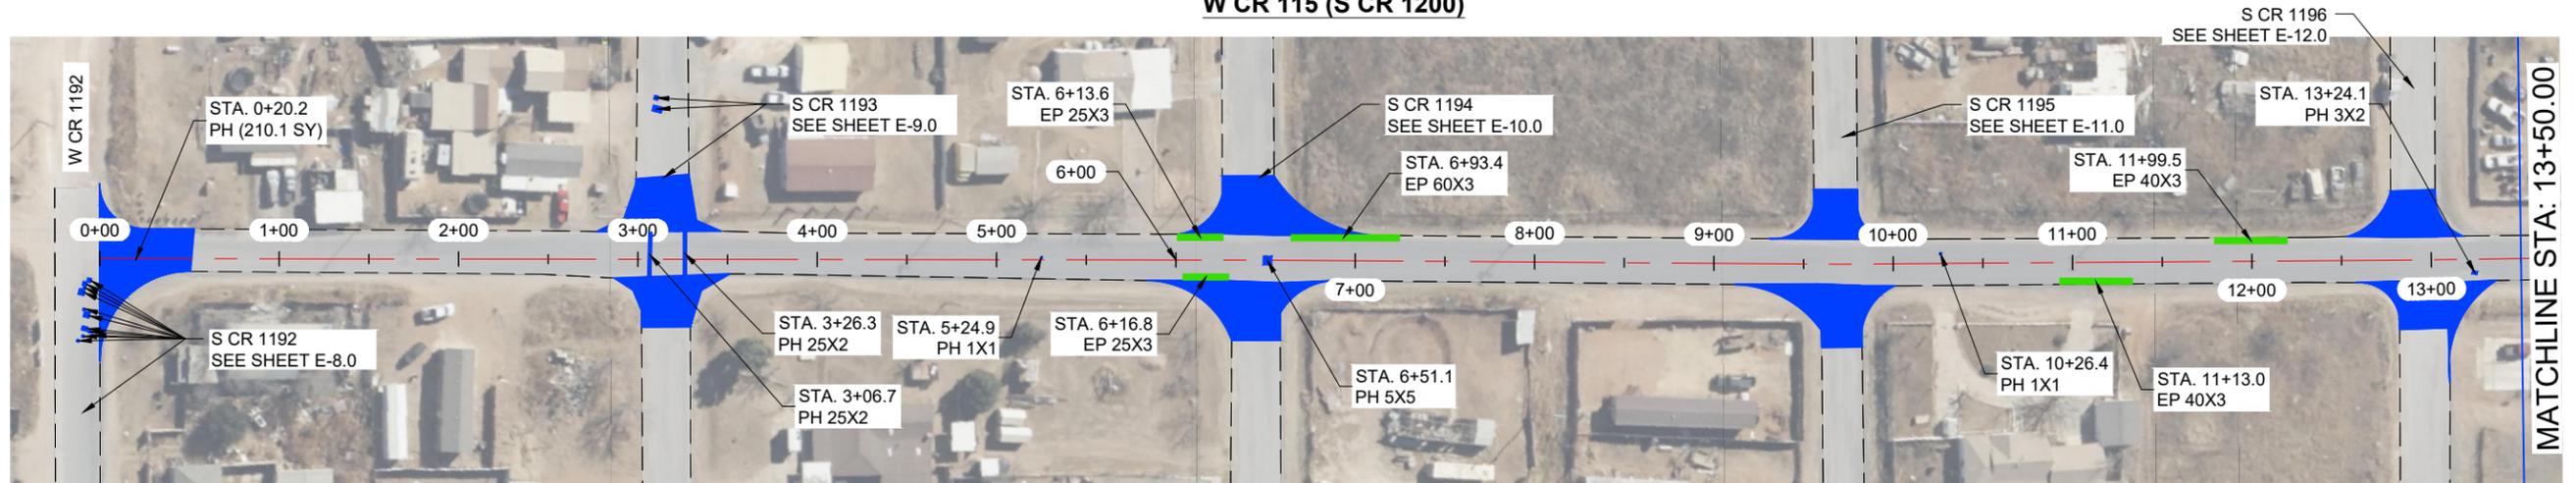

W CR 115 (S CR 1200)

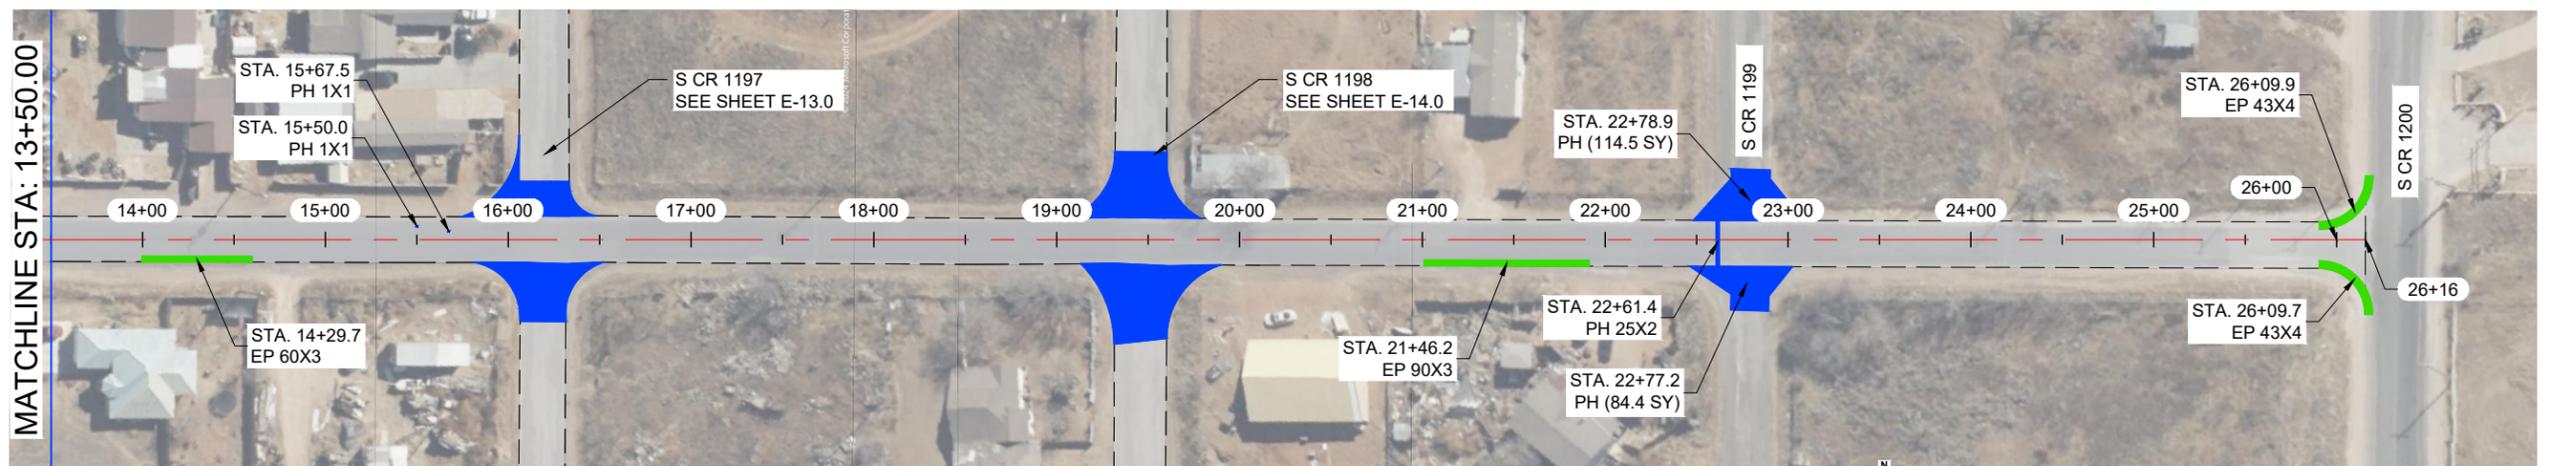


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



VICINITY MAP  
N.T.S.



SCALE: 1" = 100'

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W CR 115 (S CR 1200) QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	7,375	SY	
2	STRIPING	2,566	LF	
3	SOLID WHITE EDGE LINES	5,132	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	429.6	SY	
2	EDGE PATCHING (BY OTHERS)	151.6	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS

2024 MIDLAND PAVEMENT MAINTENANCE PROJECT


W CR 115 (S CR 1200)

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 100'	E-27.0

W CR 115 (S CR 1213)

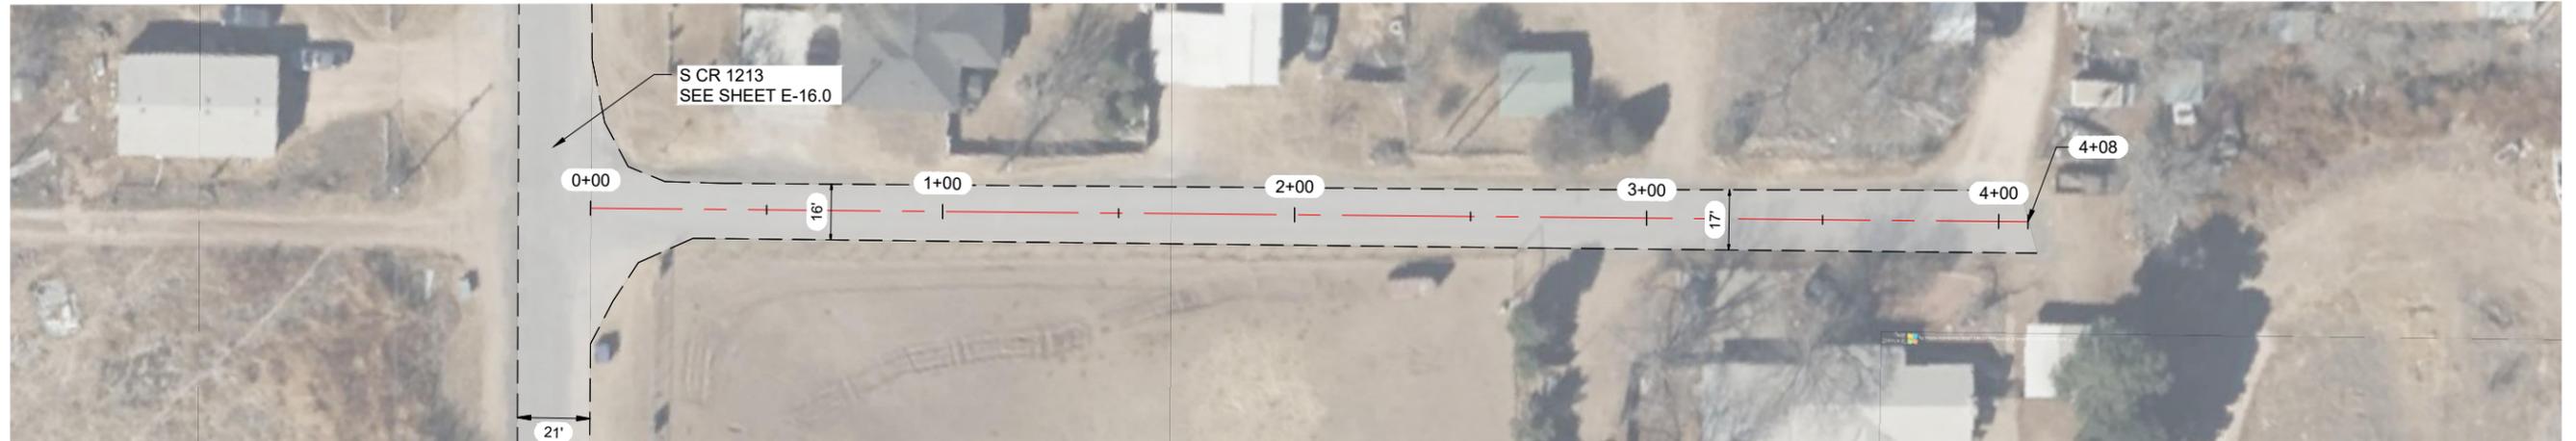


THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024



NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS

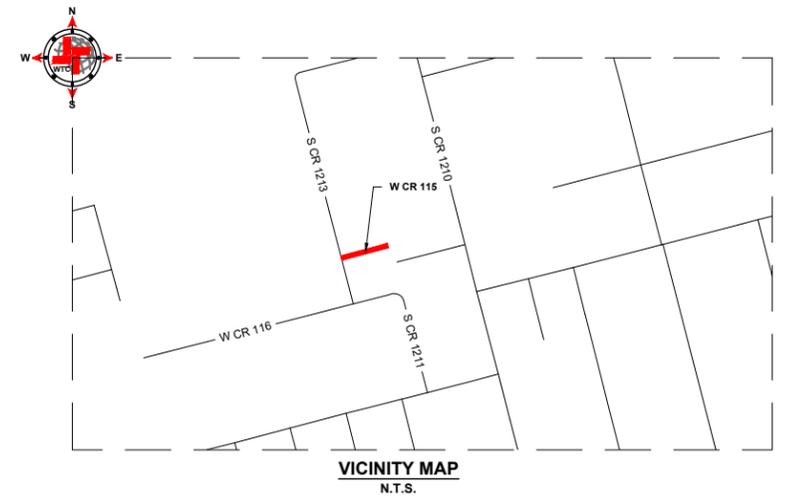

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W CR 115 (S CR 1213) QUANTITIES			
ITEM #	ITEM	QTY.	UNIT
1	TWO-COURSE SEAL COAT (APPROX.)	799	SY
2	STRIPING	-	LF
3	SOLID WHITE EDGE LINES	-	LF
WORK BY OTHERS			
ITEM #	ITEM	QTY.	UNIT
1	POTHOLE REPAIR (BY OTHERS)	-	SY
2	EDGE PATCHING (BY OTHERS)	-	SY

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
W CR 115 (S CR 1213)					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 50'	E-28.0

PLAT X: PROJECT ENGINEERING & SURVEYING TEXAS AND MIDLAND COUNTY PAVING 2024 - DESIGN 2024 - DRAWINGS 2024 AND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB. E-28.0 W CR 115 (S CR 1213) 2024.03.22.2024 3:11 PM CSH/UCS

W CR 116 (S CR 1200)

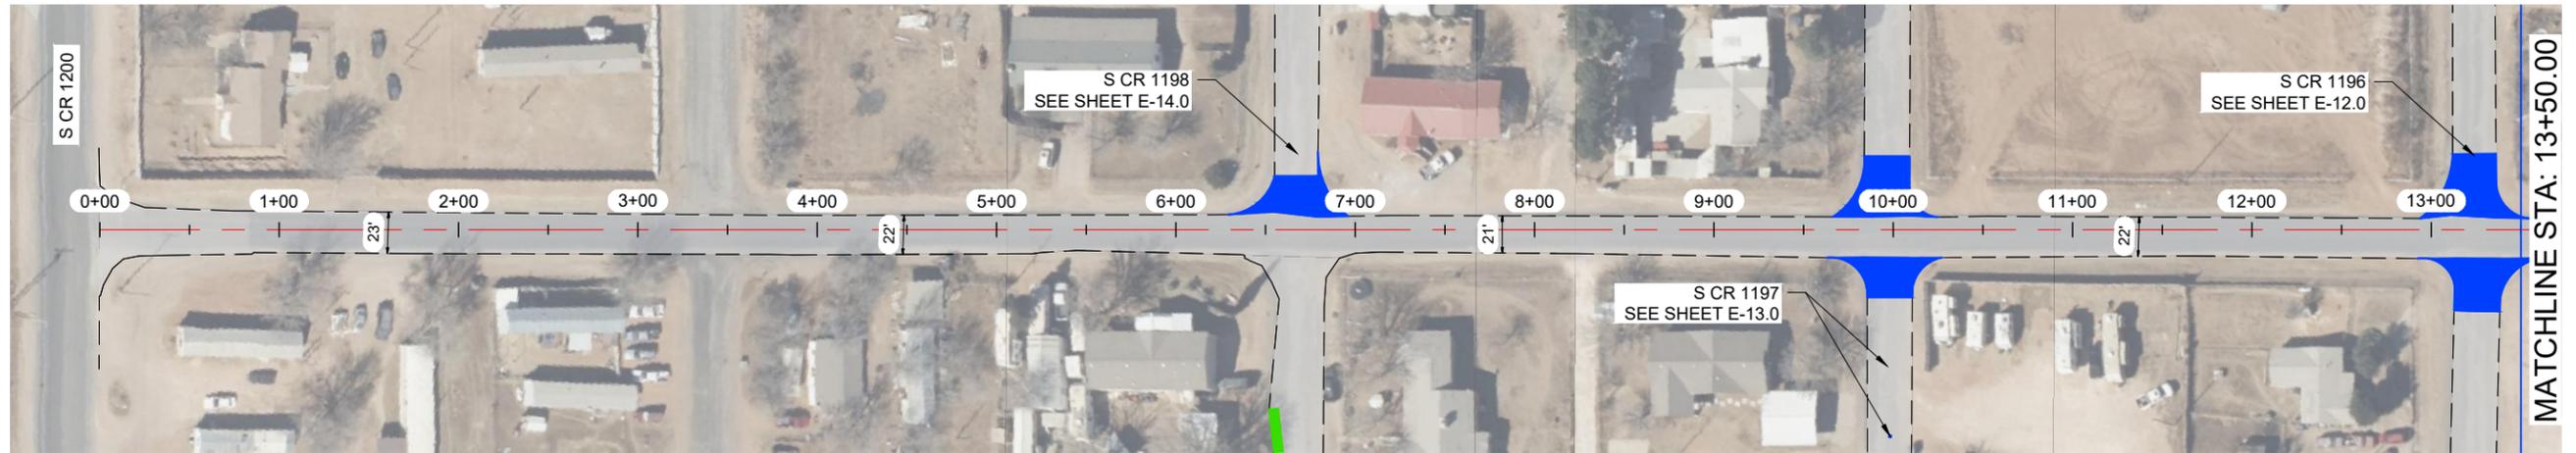


W CR 116 (S CR 1200)

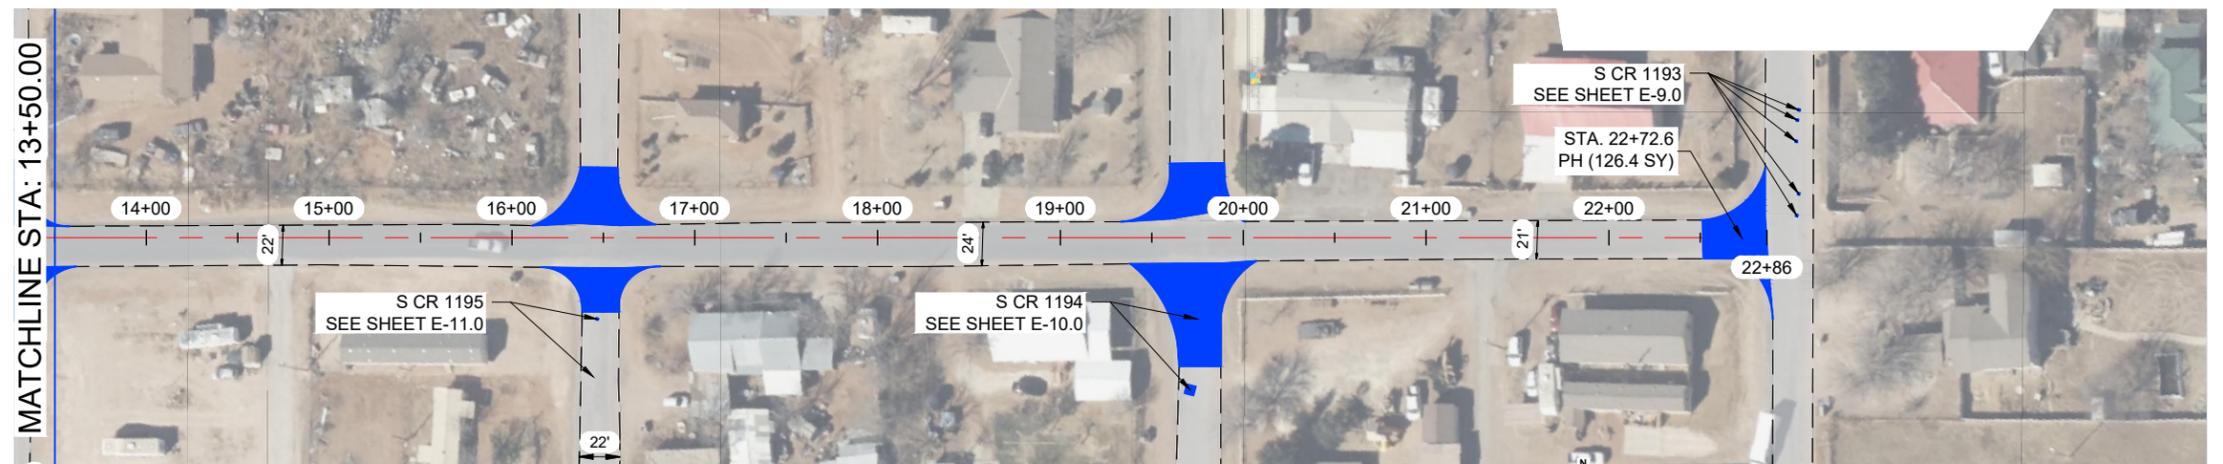

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W CR 116 (S CR 1200) QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5,769	SY	
2	STRIPING	2,237	LF	
3	SOLID WHITE EDGE LINES	-	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	126.4	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS

2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

W CR 116 (S CR 1200)



DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 100'	E-29.0

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND PAVEMENT MAINTENANCE PROJECT\FIG 1 LAYOUT TAB E-29.0\W CR 116 (S CR 1200)\20240313.PLM CONCLUDES

W CR 116 (S CR 1211)





W CR 116 (S CR 1211)

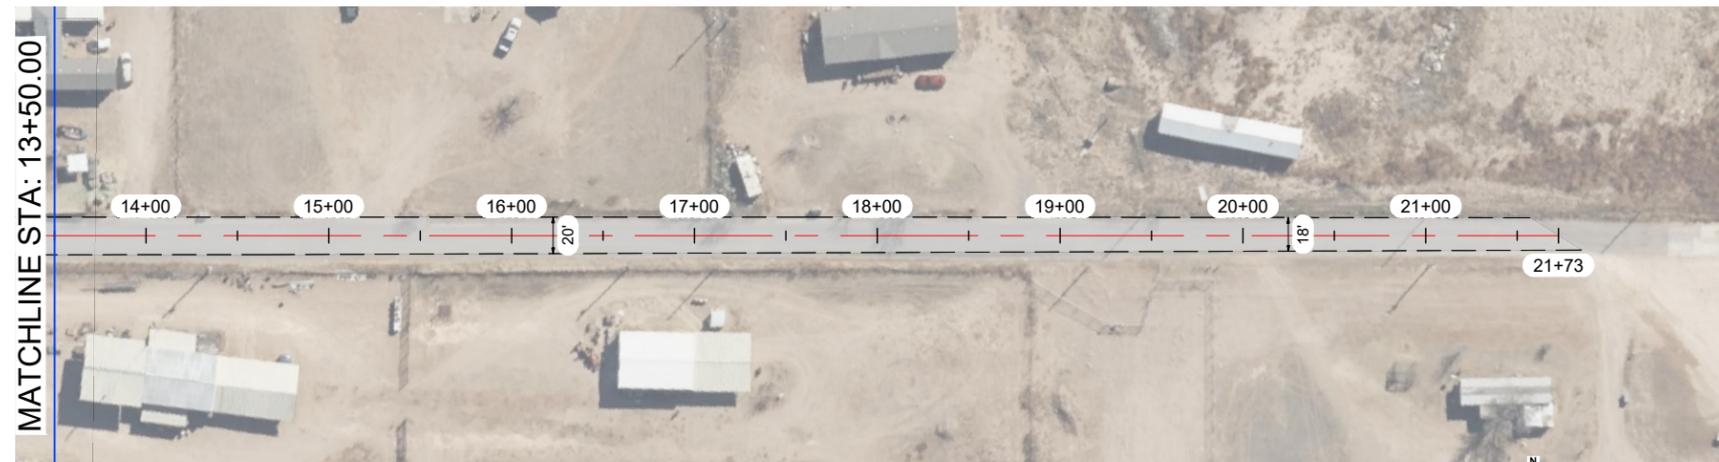

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS

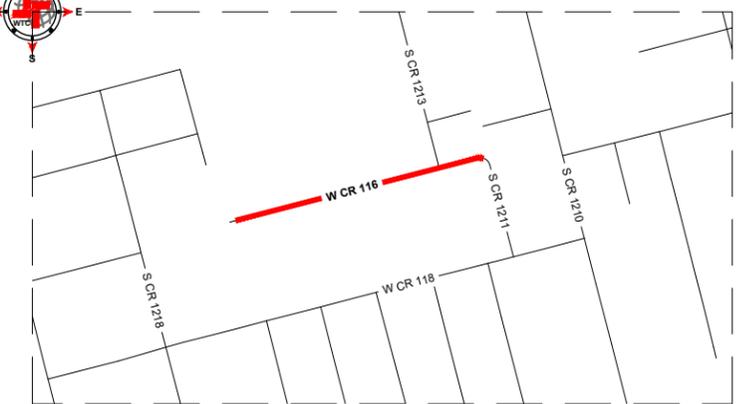

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W CR 116 (S CR 1211) QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	4,912	SY	
2	STRIPING	2,173	LF	
3	SOLID WHITE EDGE LINES	-	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	-	SY	
2	EDGE PATCHING (BY OTHERS)	26.2	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00


REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.




MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
W CR 116 (S CR 1211)					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 100'	E-30.0

W CR 118

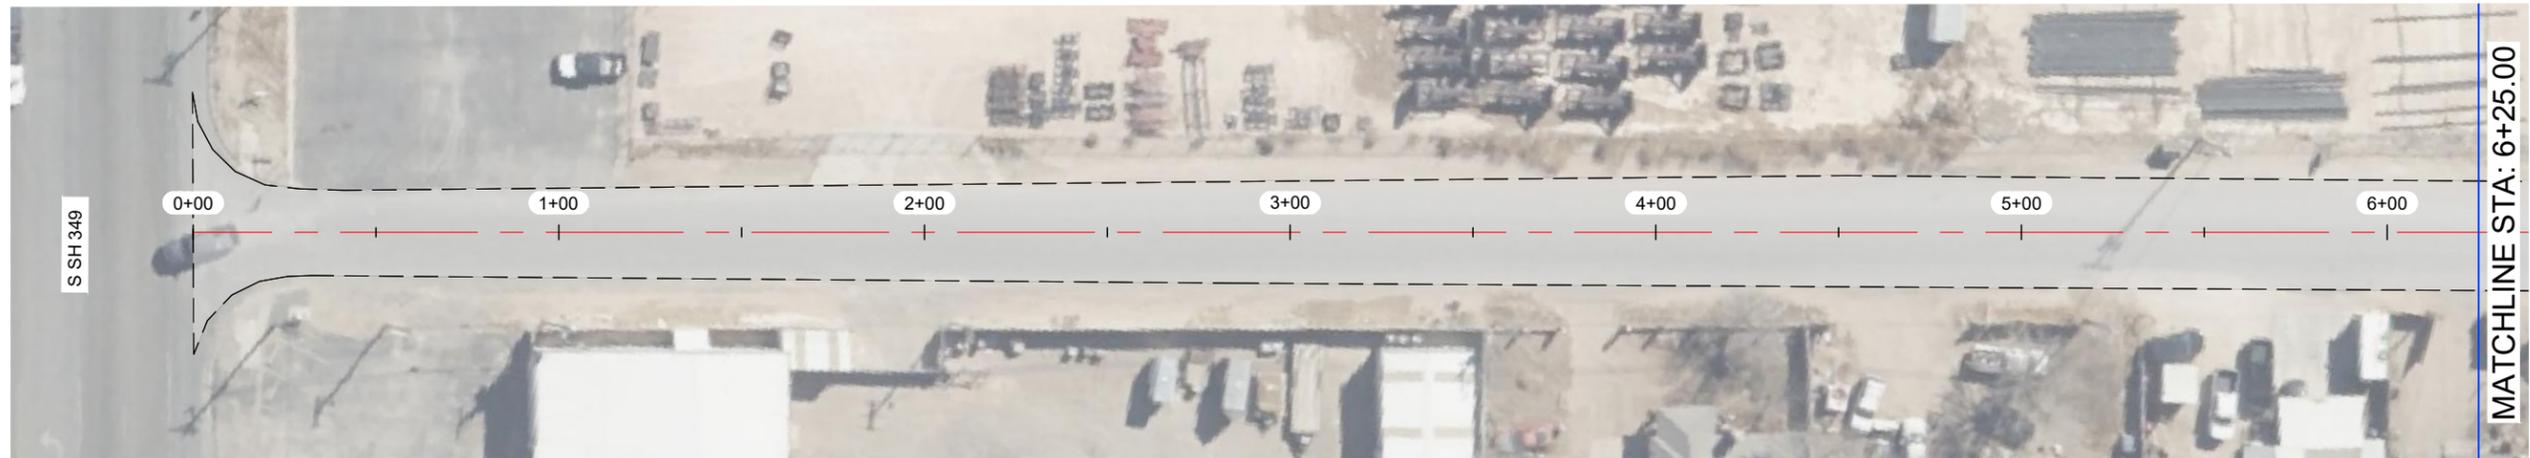


W CR 118

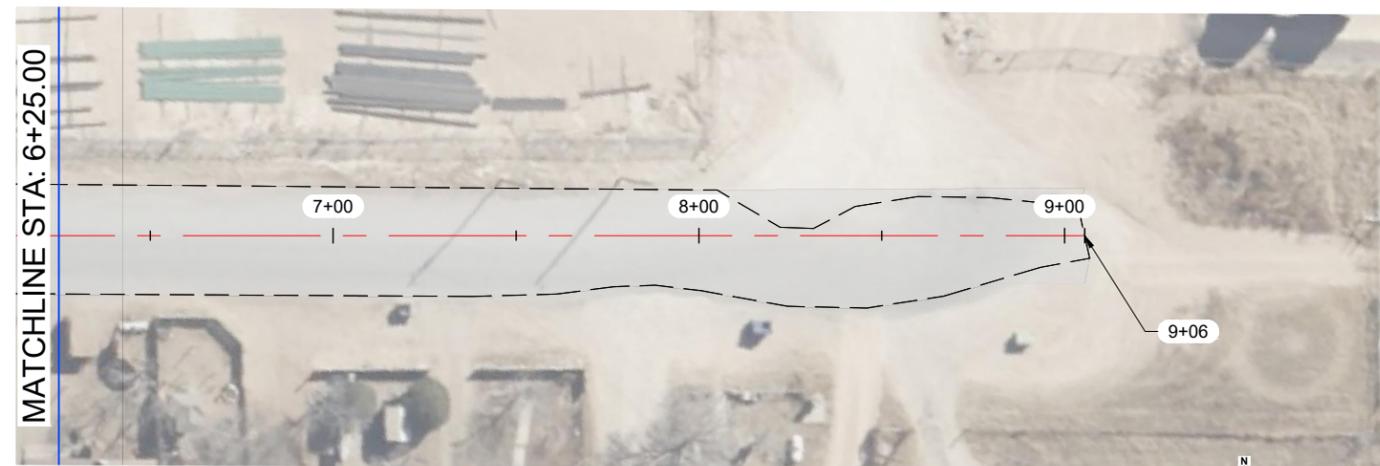

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W CR 118 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	2,858	SY	
2	STRIPING	856	LF	
3	SOLID WHITE EDGE LINES	1,712	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	-	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM




MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
W CR 118						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 50'	E-31.0	



**W CR 120**

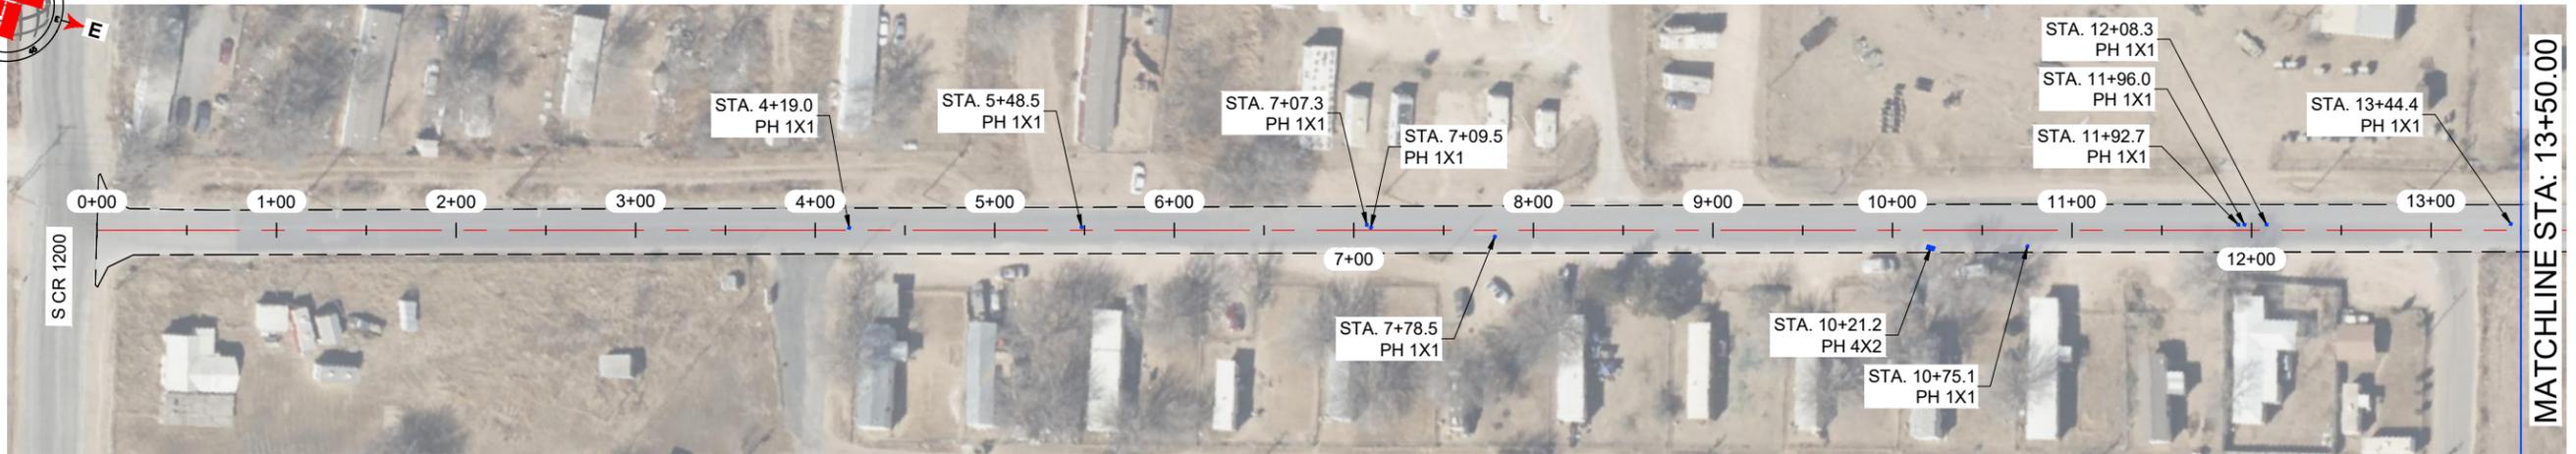


**W CR 120**

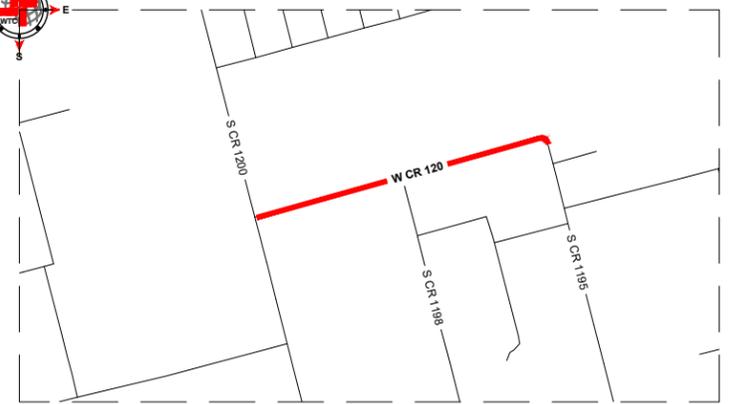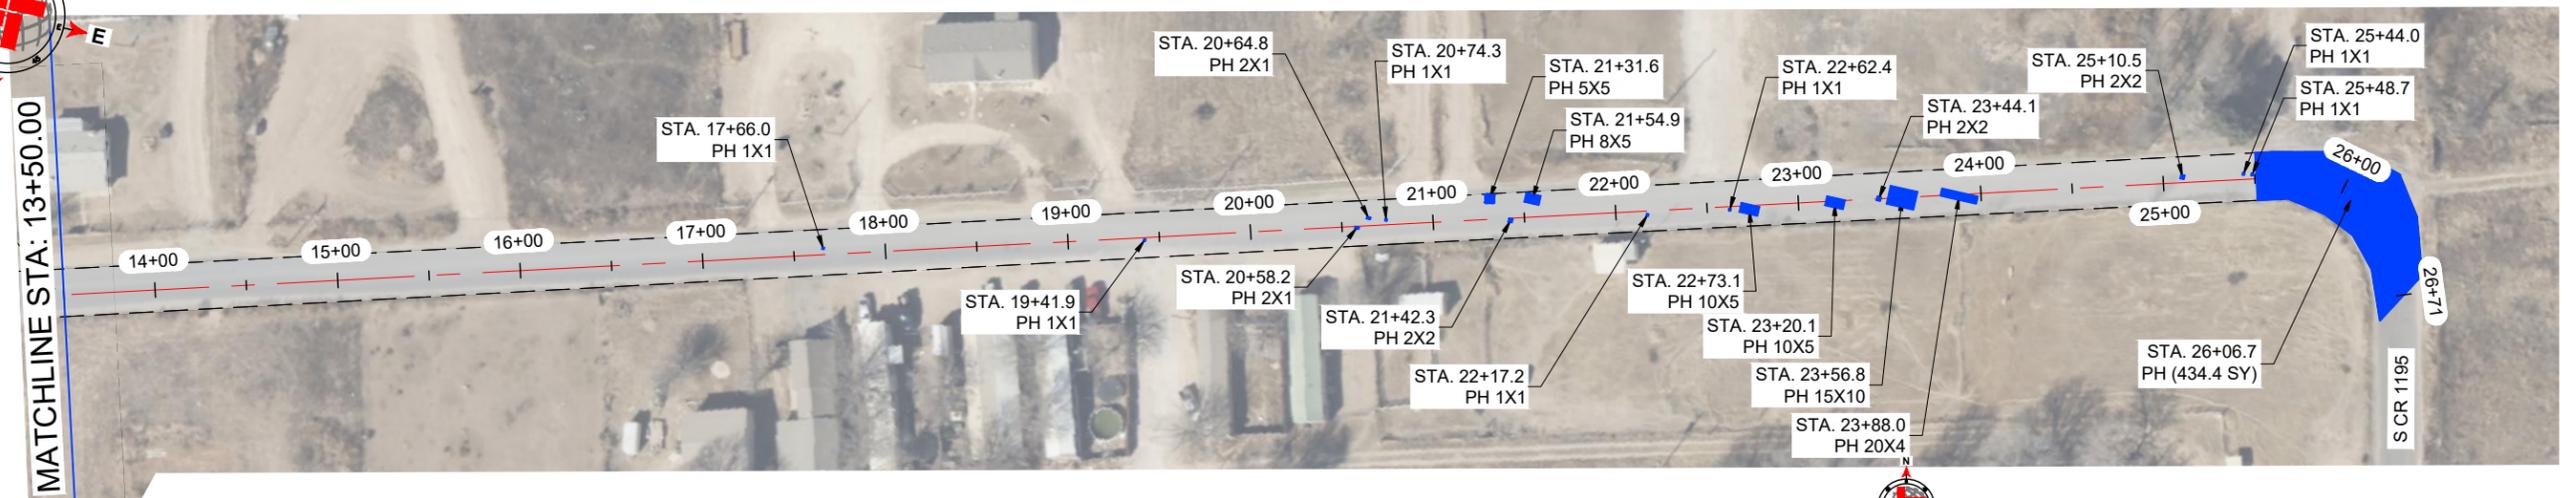

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W CR 120 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	7,699	SY	
2	STRIPING	2,647	LF	
3	SOLID WHITE EDGE LINES	5,294	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	488.6	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

**MIDLAND COUNTY, TEXAS**


**2024 MIDLAND PAVEMENT MAINTENANCE PROJECT**

**W CR 120**


DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 100'	E-32.0

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND COUNTY PAVEMENT MAINTENANCE PROJECT\FIG 1 LAYOUT TAB E-32.0\WCR 120 202404.11.PLM.CHG.0005

W CR 123

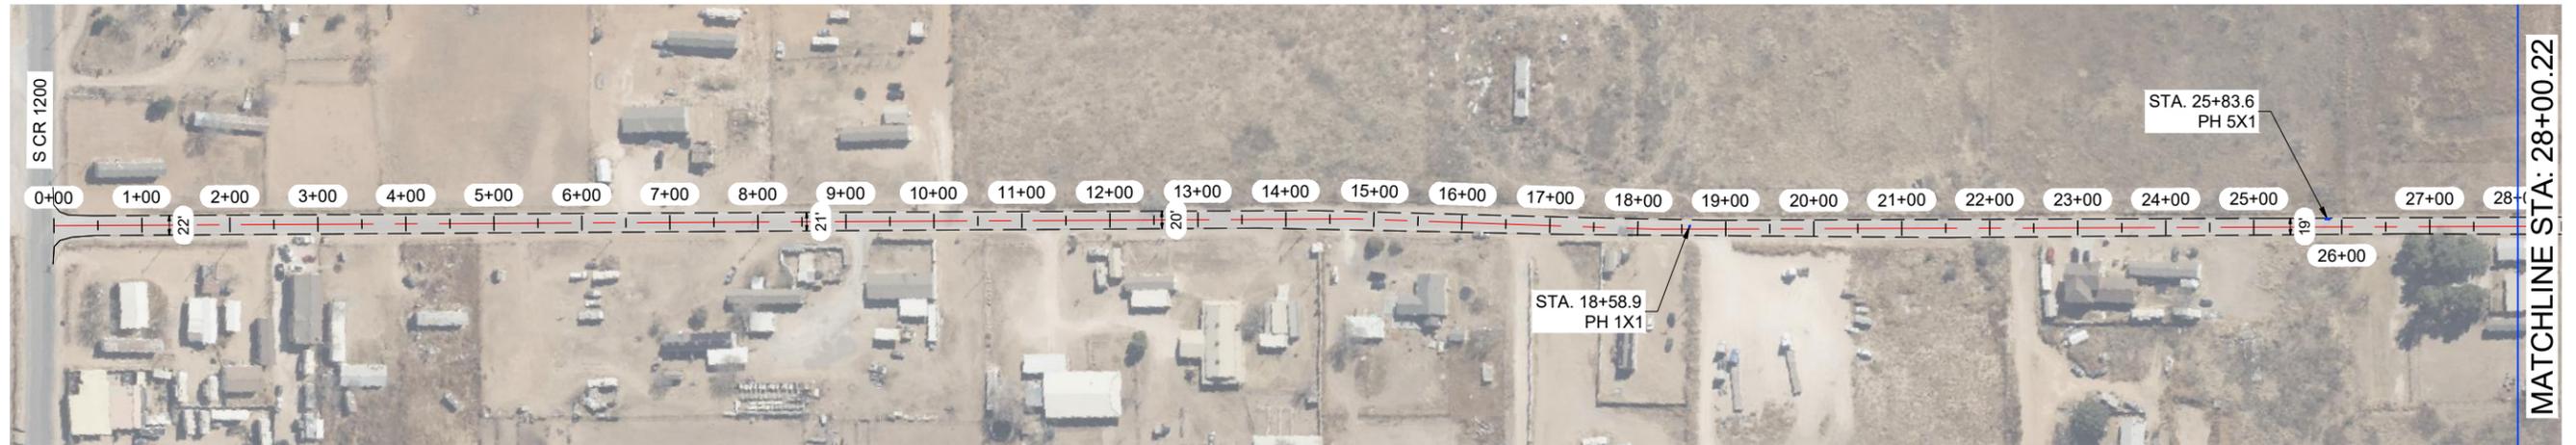



W CR 123



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS

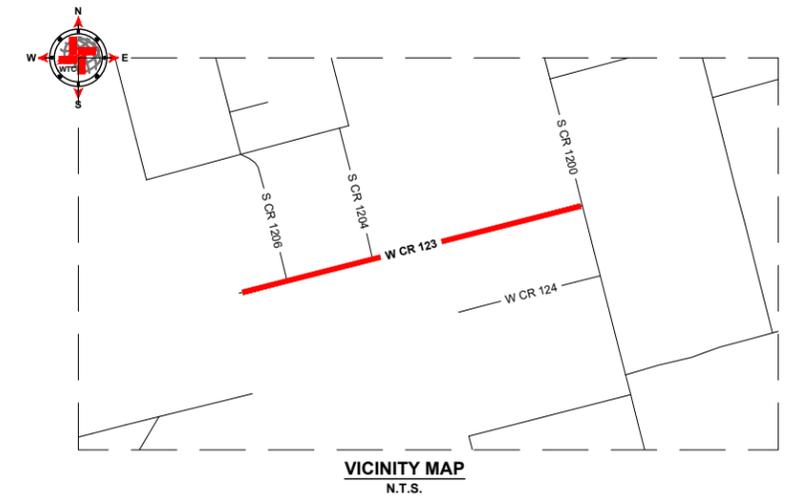

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W CR 123 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	6,857	SY	
2	STRIPING	3,026	LF	
3	SOLID WHITE EDGE LINES	-	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.7	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE




LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM


MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
W CR 123						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 200'	E-33.0	

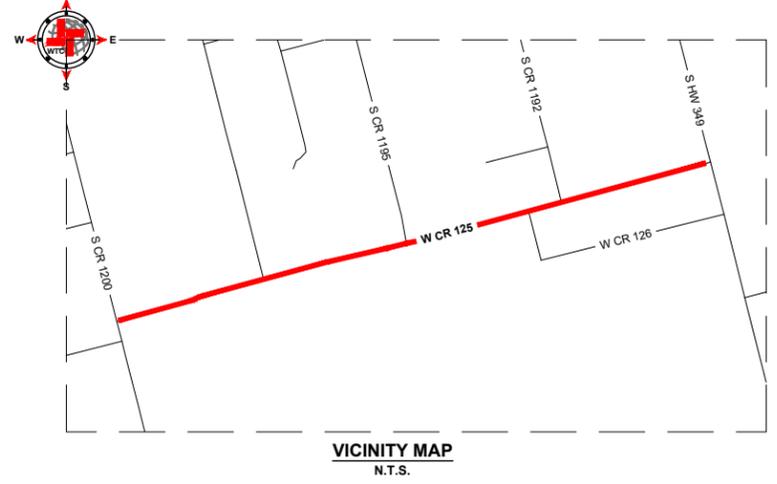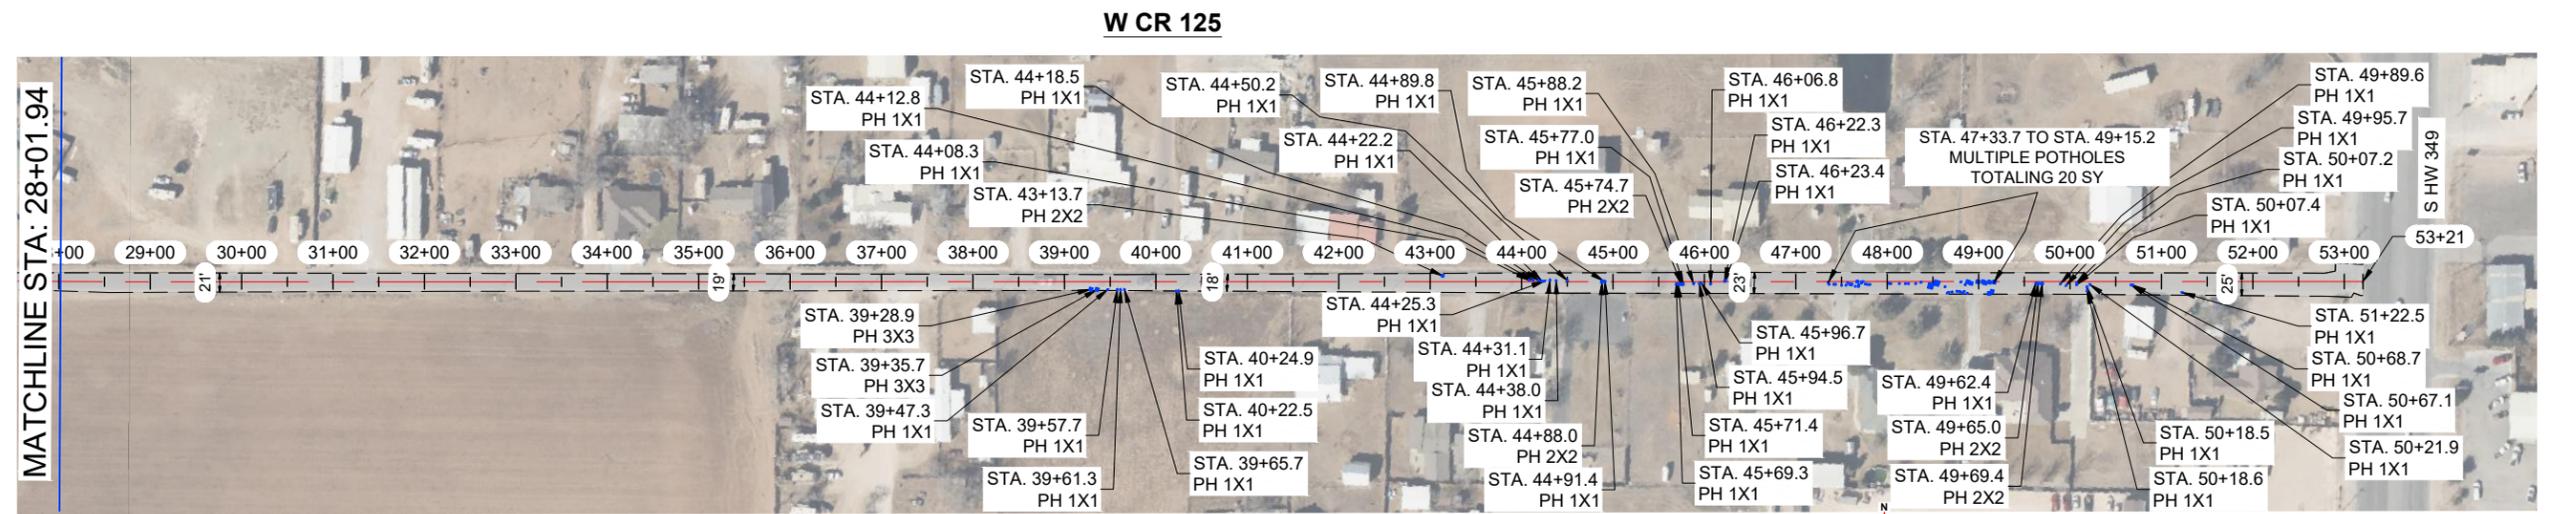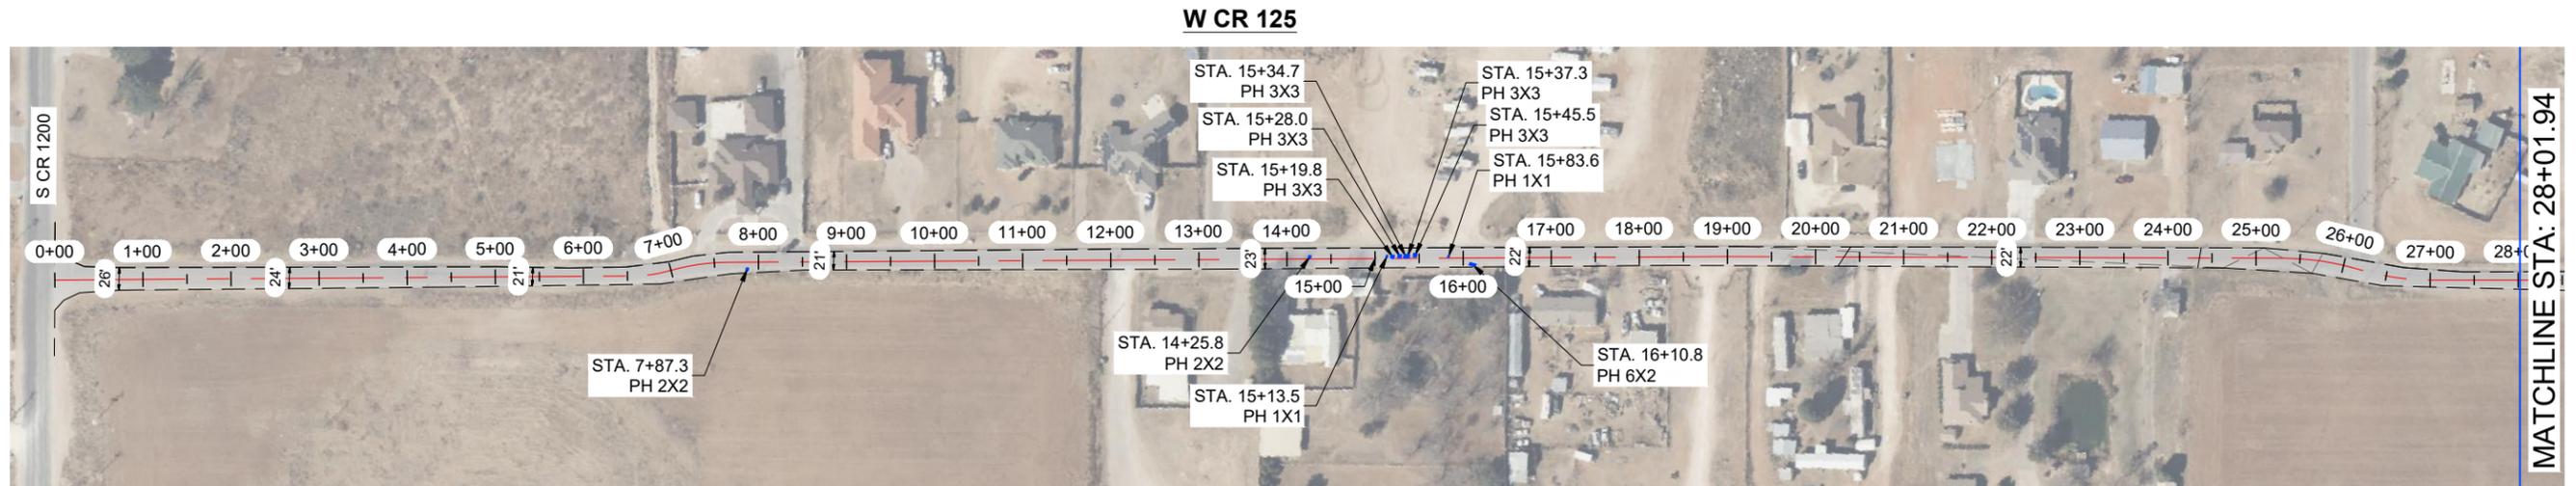

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W CR 125 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	12,908	SY	
2	STRIPING	5,269	LF	
3	SOLID WHITE EDGE LINES	-	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	35.6	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.


Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM



MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
W CR 125						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 200'	E-34.0	

DRAWING NO. 2024-001 AND PAVEMENT MAINTENANCE PROJECT LAYOUT TAB. E-34.0 W CR 125 2024.03.14 PM CHC/ECG

W CR 150 (S CR 1200 TO S CR 1210)

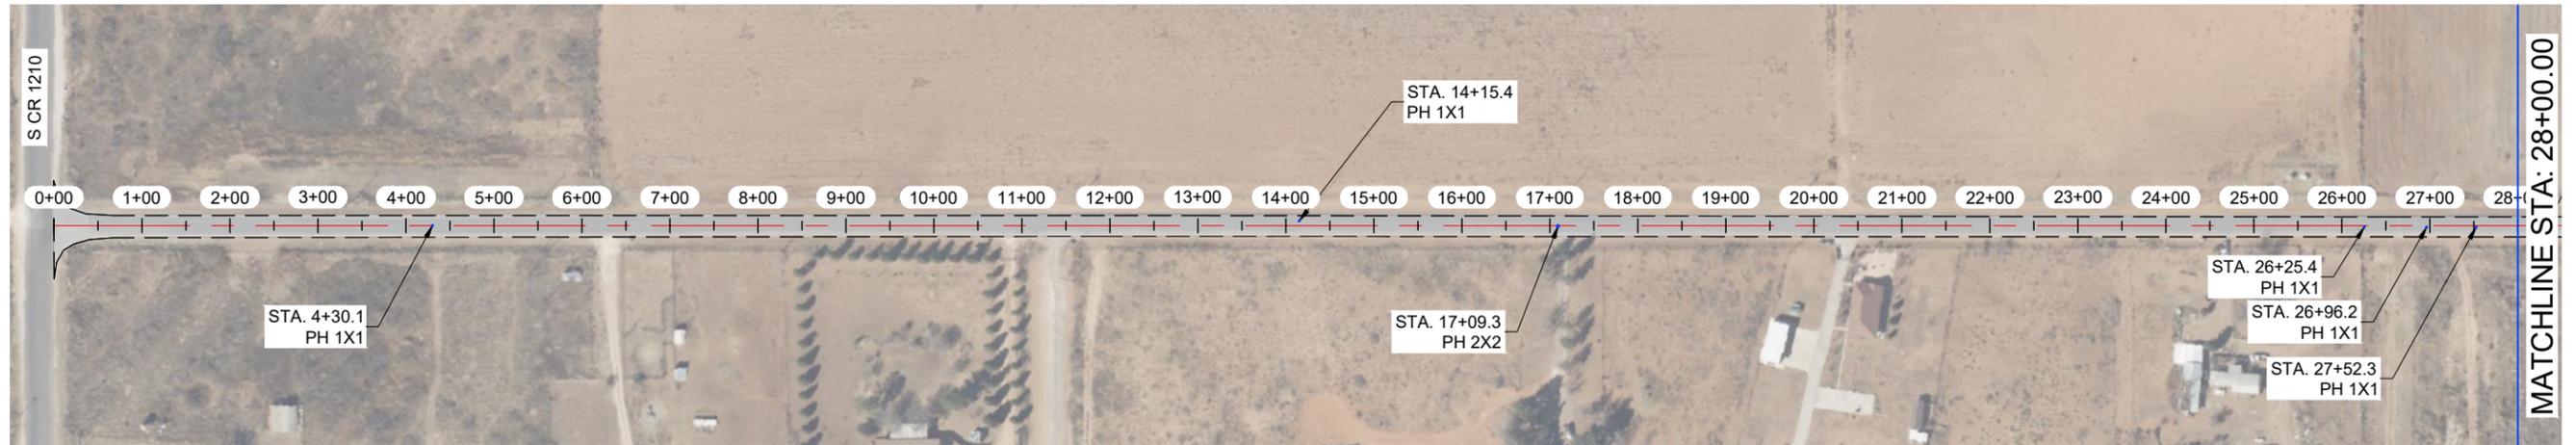

W CR 150 (S CR 1200 TO S CR 1210)

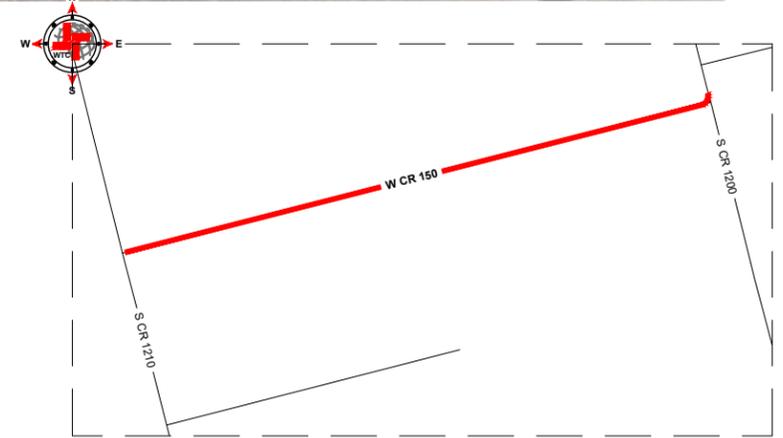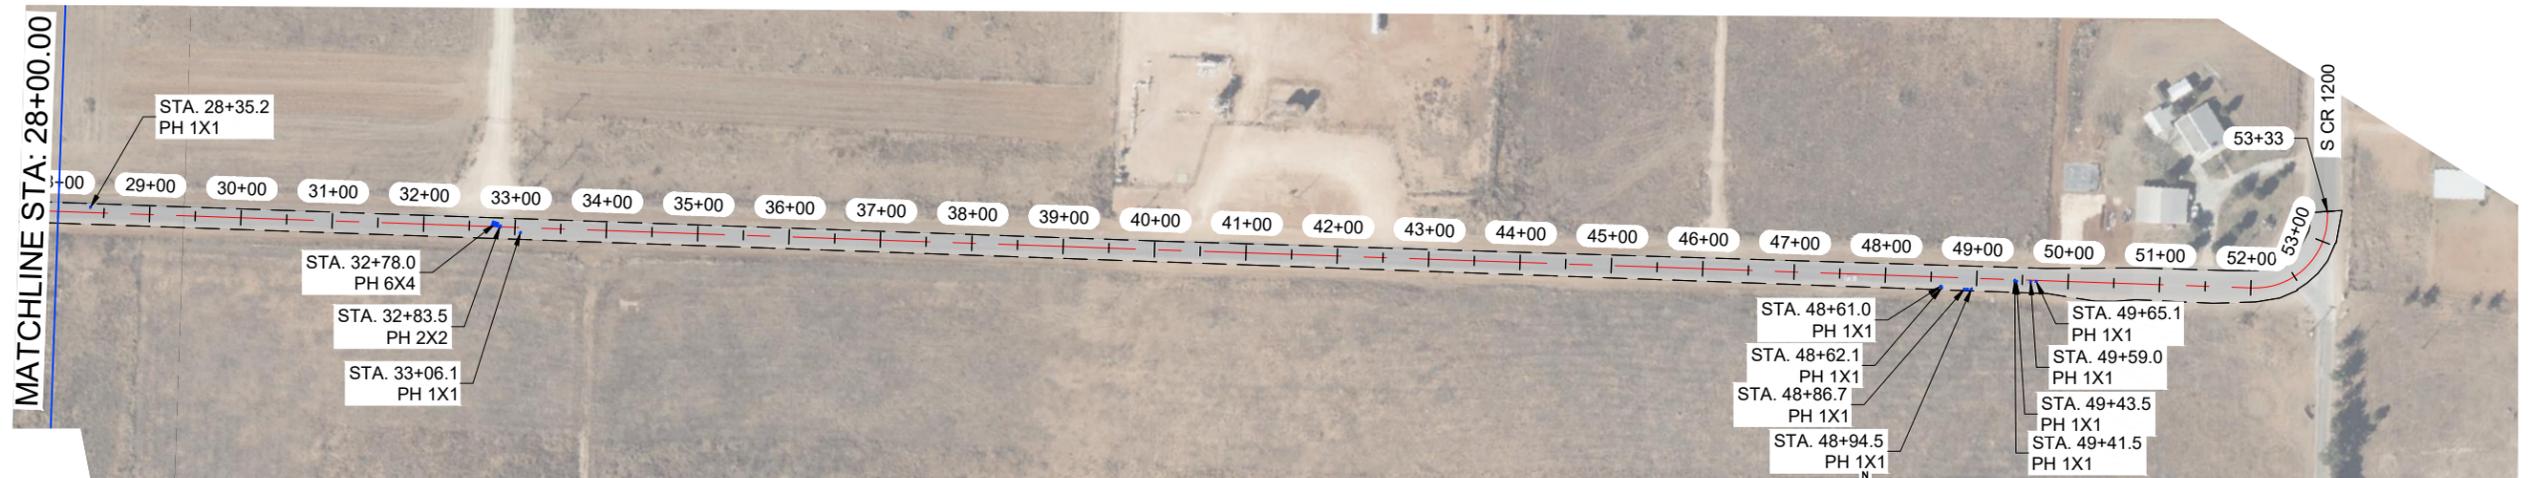


*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W CR 150 (S CR 1200 TO S CR 1210) QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	14,493	SY	
2	STRIPING	5,309	LF	
3	SOLID WHITE EDGE LINES	10,618	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	5.3	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00


REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.  
CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.




MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
W CR 150 (S CR 1200 TO S CR 1210)						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 200'	E-35.0	

W CR 150 (S HW 349 TO S CR 1200)


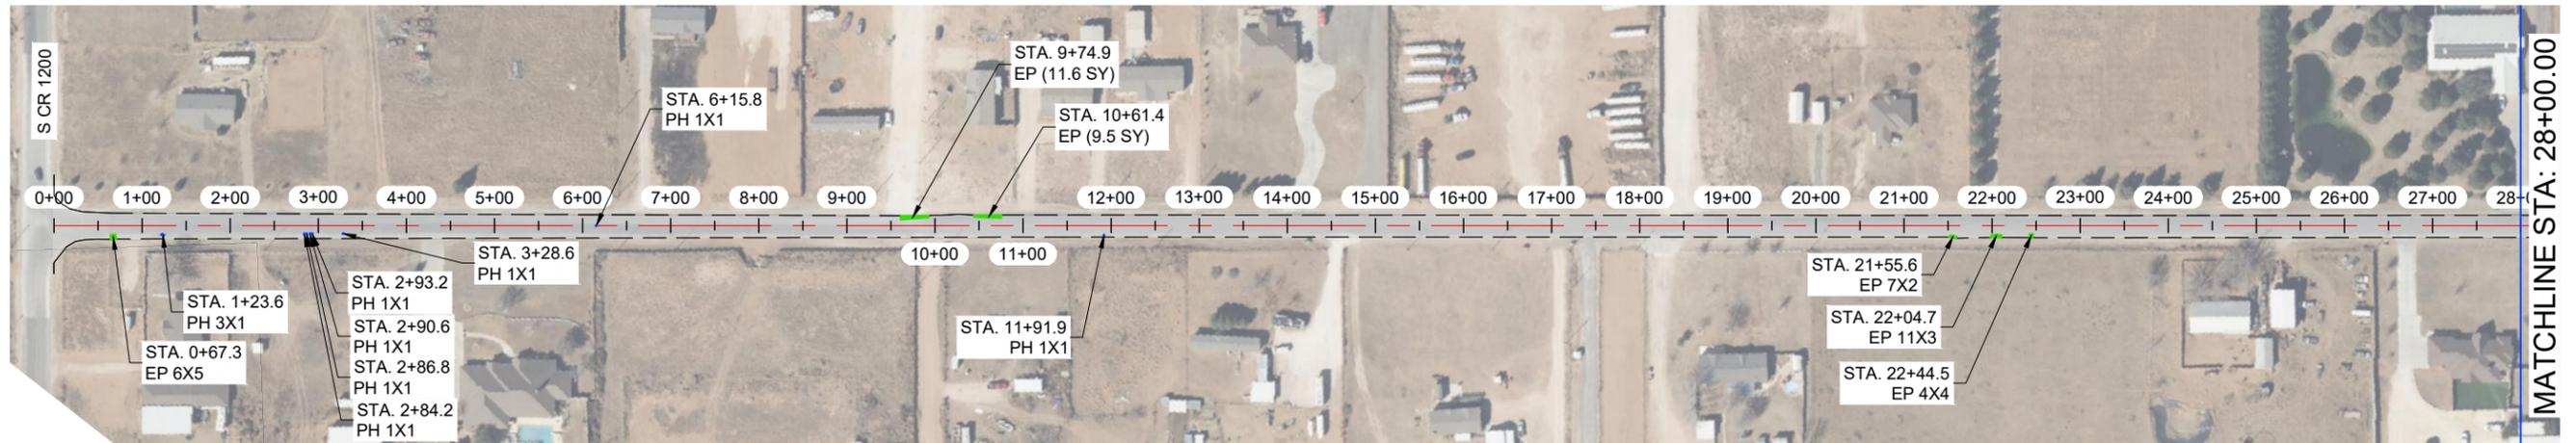


W CR 150 (S HW 349 TO S CR 1200)

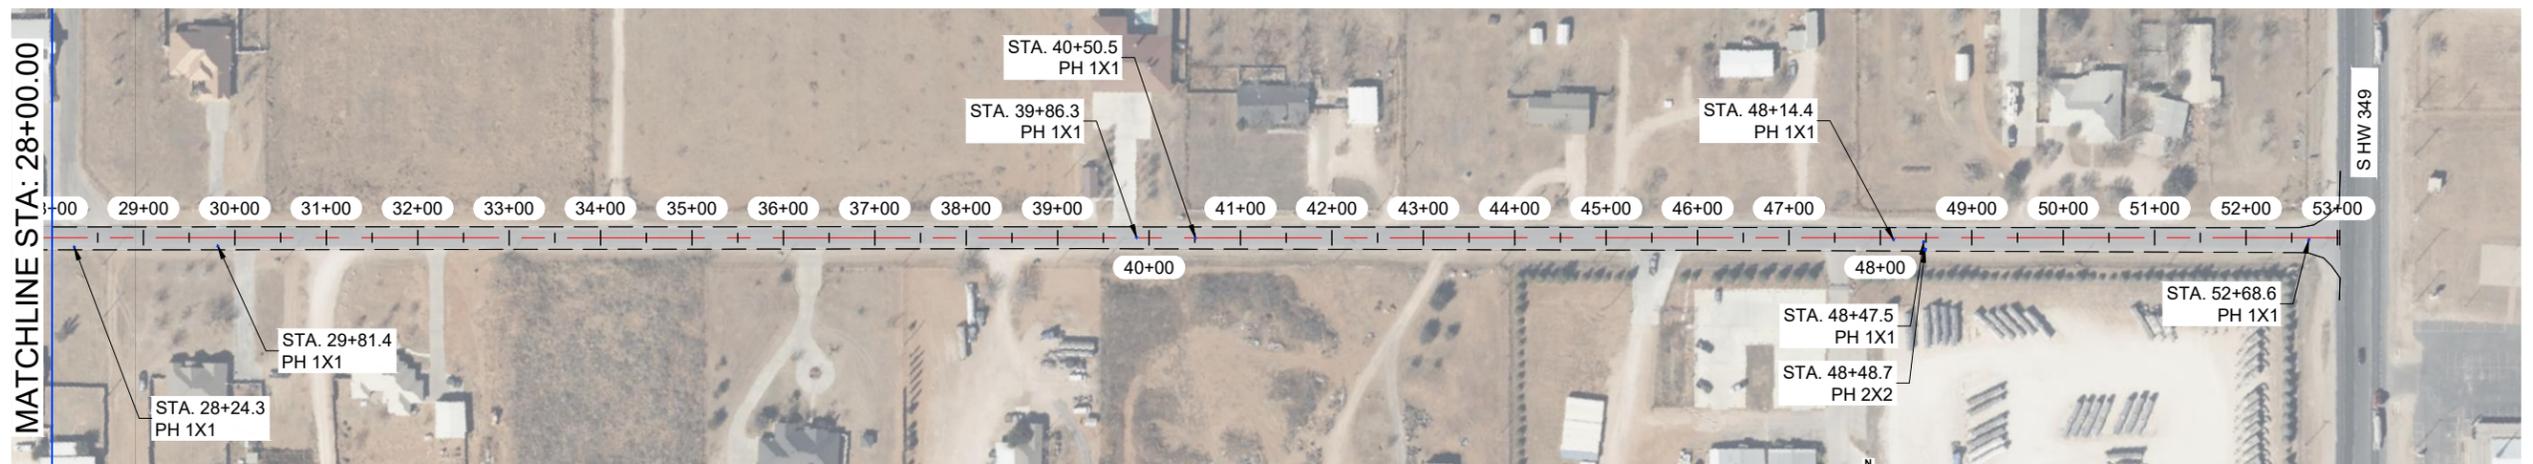

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

- NOTES:
- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
  - 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
  - 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
  - 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS

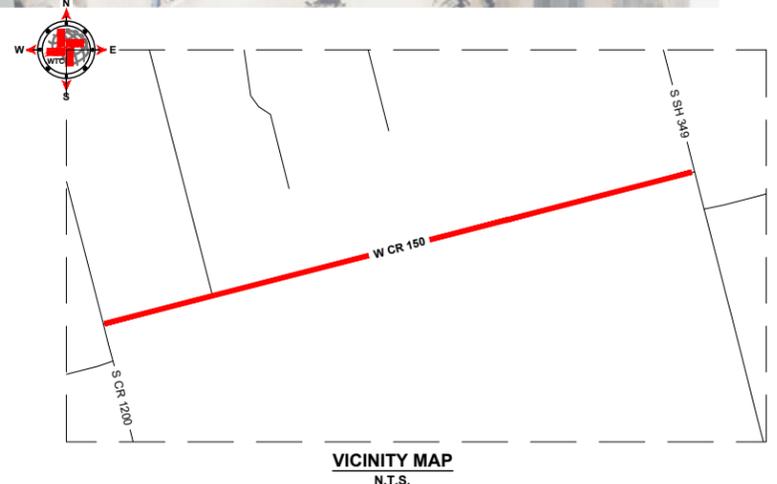

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W CR 150 (S HW 349 TO S CR 1200) QUANTITIES			
ITEM #	ITEM	QTY.	UNIT
1	TWO-COURSE SEAL COAT (APPROX.)	15,017	SY
2	STRIPING	5,253	LF
3	SOLID WHITE EDGE LINES	10,506	LF
WORK BY OTHERS			
ITEM #	ITEM	QTY.	UNIT
1	POTHOLE REPAIR (BY OTHERS)	2.3	SY
2	EDGE PATCHING (BY OTHERS)	31.4	SY

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE





LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM


MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT					
W CR 150 (S HW 349 TO S CR 1200)					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 200'	E-36.0

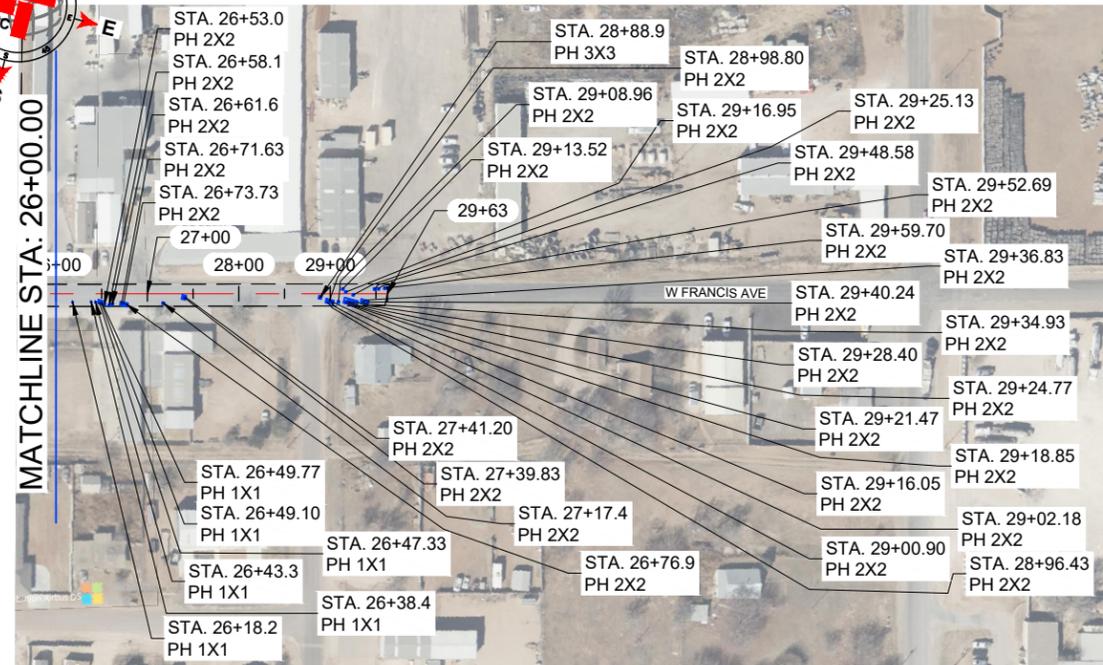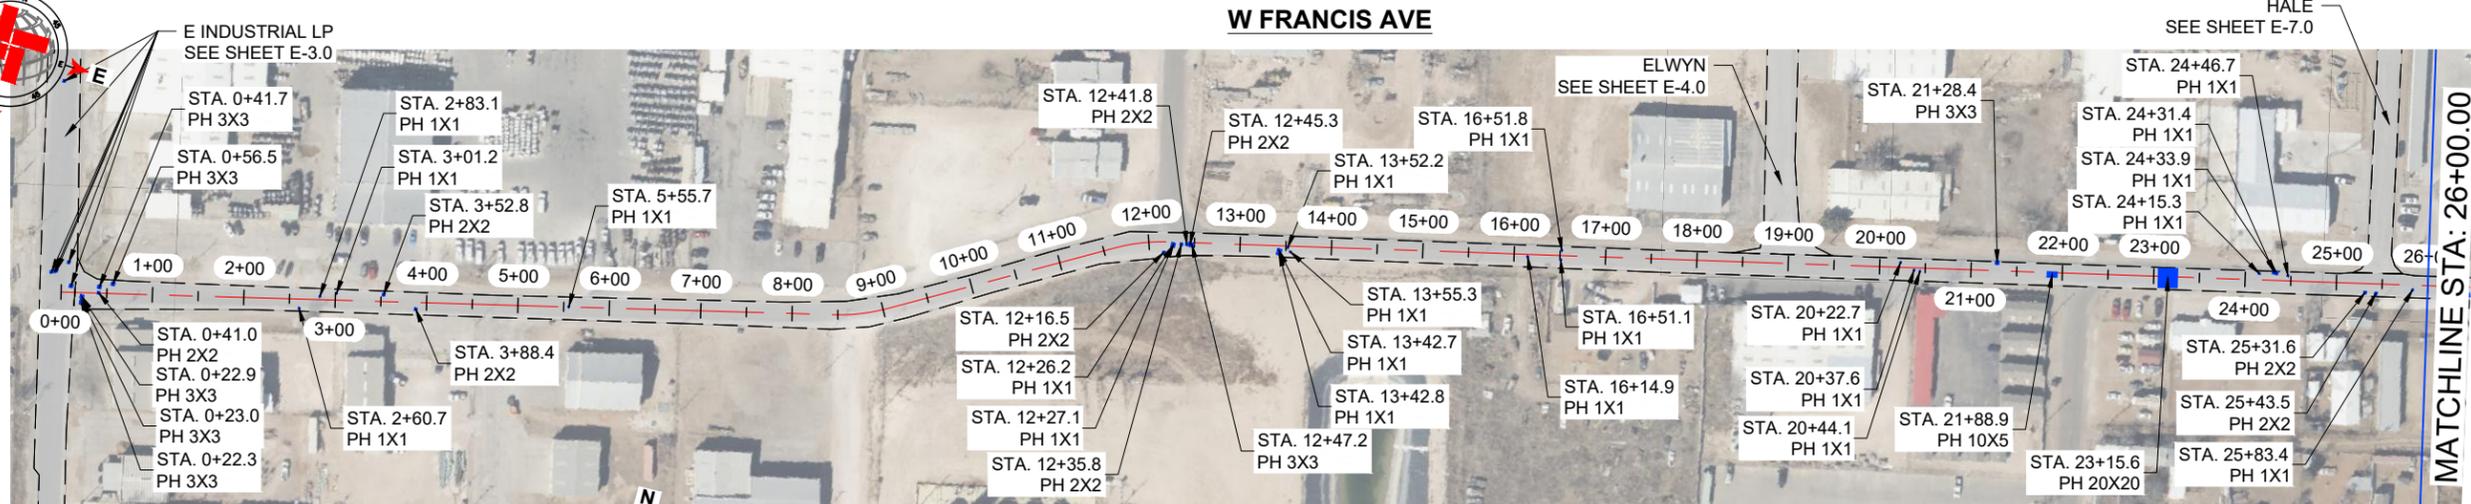

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W FRANCIS AVE QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	8,254	SY	
2	STRIPING	2,938	LF	
3	SOLID WHITE EDGE LINES	5,876	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	77.4	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS



2024 MIDLAND PAVEMENT MAINTENANCE PROJECT

W FRANCIS AVE

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 200'	E-37.0

DRAWING NO. 2024-0001 AND COUNTY FILING NO. 2024-0001 - DESIGNER: JAMES CHAD TOMPKINS, P.E. 93839 - SURVEYOR: JAMES CHAD TOMPKINS, P.S. 11818 - DATE: 3/22/24



**CARTER AVE**

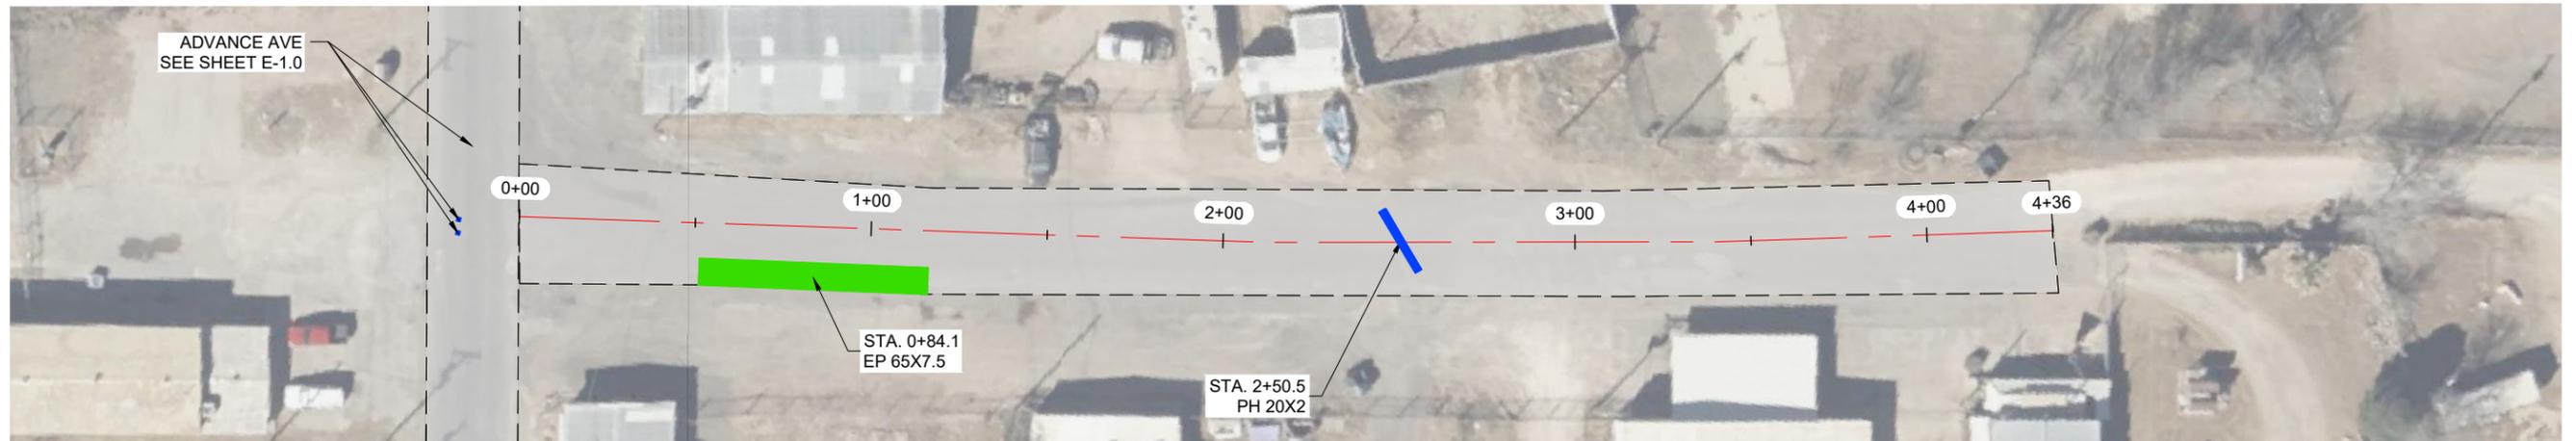

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS

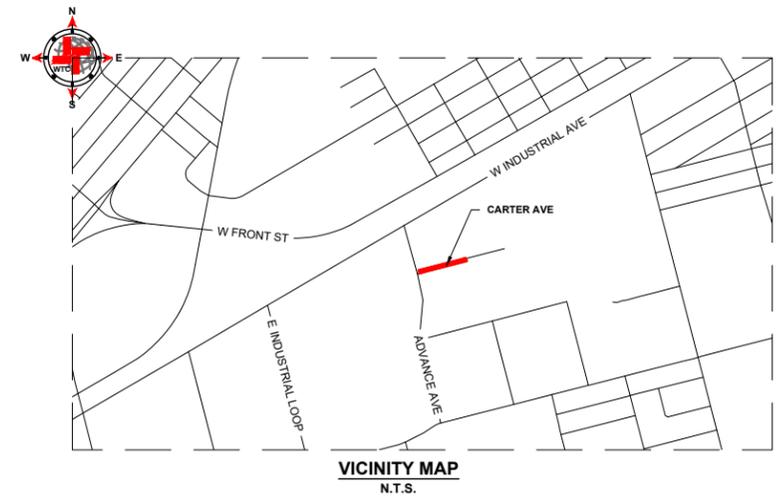

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

CARTER AVE QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	1,486	SY	
2	STRIPING	411	LF	
3	SOLID WHITE EDGE LINES	822	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	4.4	SY	
2	EDGE PATCHING (BY OTHERS)	54.2	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545



TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT						
CARTER AVE						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 50'	E-38.0	




PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND COUNTY PAVEMENT MAINTENANCE PROJECT\FIG1.LAYOUT.TAB E-38.0 CARTER AVE 3/22/24 3:16 PM GCH/EDS



N CR 1284



N CR 1284

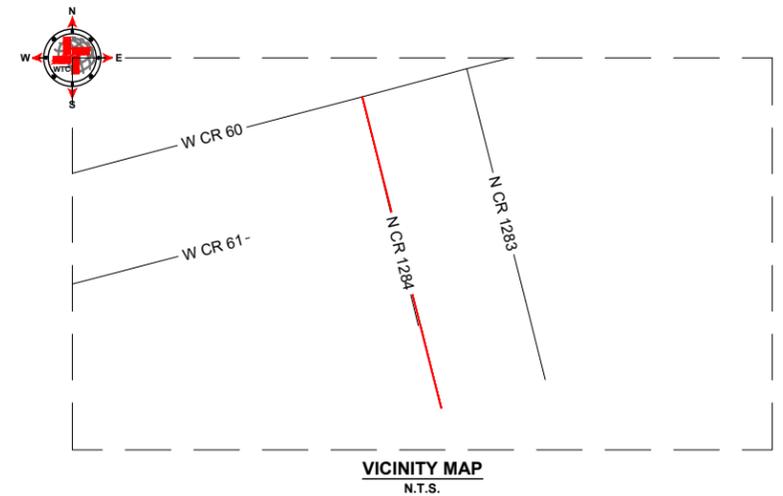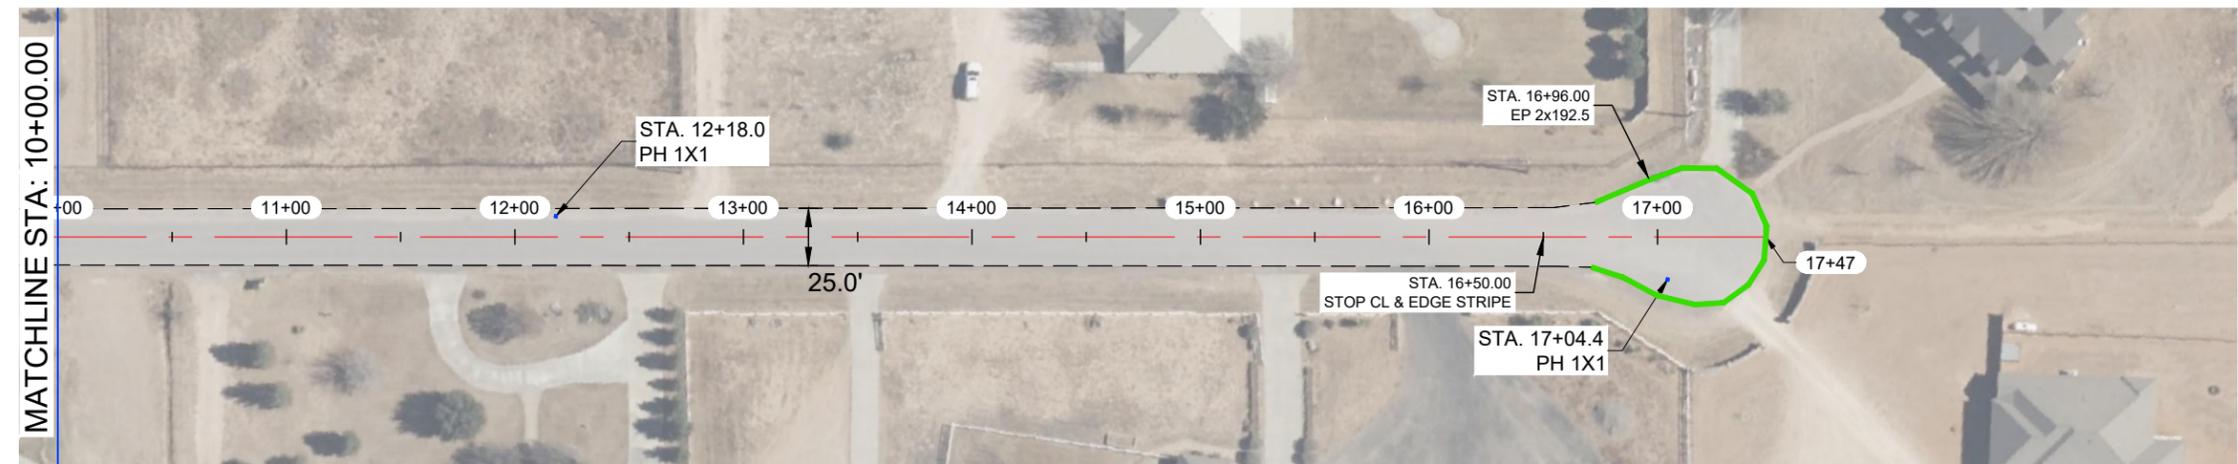

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N CR 1284 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5,077	SY	
2	STRIPING	1,625	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	25.7	SY	
2	EDGE PATCHING (BY OTHERS)	48.8	SY	

**WTC**  
ENGINEERS | SURVEYORS

West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS

2024 MIDLAND PAVEMENT MAINTENANCE PROJECT  
N CR 1284

DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 80'	F-1.0

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\TEXAS\MIDLAND COUNTY PAVING\2024\MIDLAND PAVEMENT MAINTENANCE PROJECT\FIG1.LAYOUT.TAB F-1.0 N CR 1284 2024.MXD 2:58 PM 3/22/2024







N CR 1272



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS.

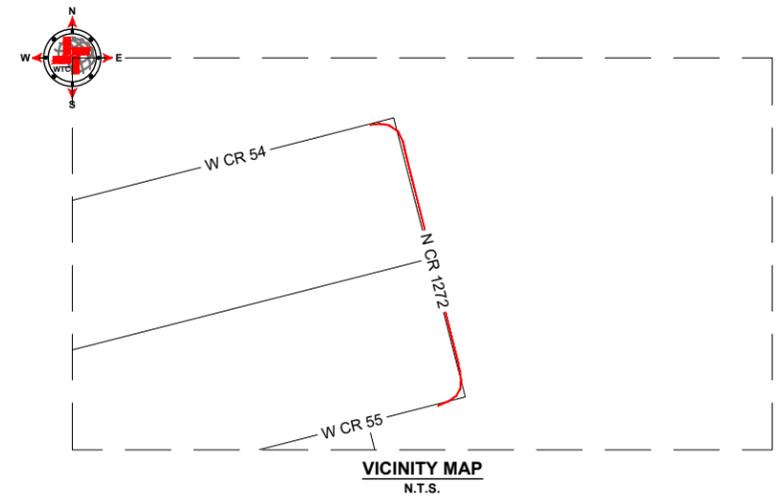

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N CR 1272 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	1,483	SY	
2	STRIPING	516	LF	
3	SOLID WHITE EDGE LINES	1032	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	-	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.


CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545  
TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT N CR 1272						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 50'	F-4.0	

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\MIDLAND COUNTY PAVING\2024\MIDLAND PAVEMENT MAINTENANCE PROJECT\FIG 4.0 N CR 1272\20240324.F4.0.MIDLAND.PAVEMENT.MAINTENANCE.PROJECT.PLOT.LAYOUT.TAB F4.0 N CR 1272 20240324 2:58 PM C:\WINDOWS\SYSTEM32\cmd.exe

N CR 1273

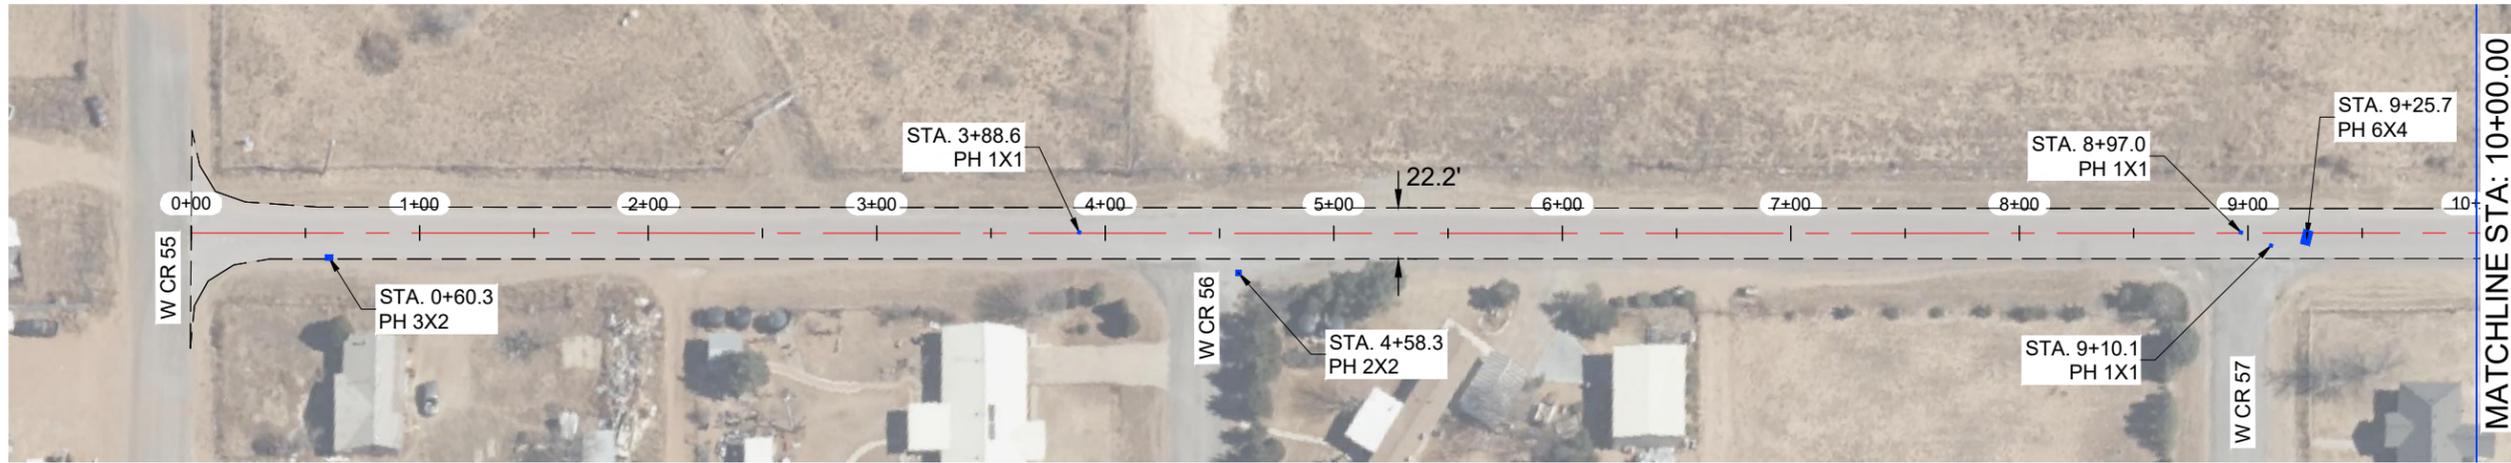


N CR 1273



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS.

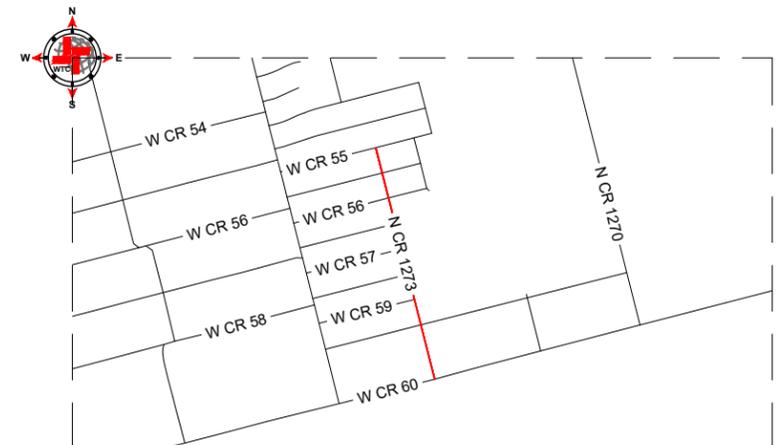

VICINITY MAP  
N.T.S.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N CR 1273 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5,213	SY	
2	STRIPING	2,003	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	4.4	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545




TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT N CR 1273						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 80'	F-5.0	



PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\TEXAS\MIDLAND COUNTY PAVING\2024 - DESIGN\65276 - DRAWINGS\DWG\65276 MIDLAND PAVEMENT MAINTENANCE PROJECT PLOT LAYOUT TAB F-4.8 N CR 1273 20240324 2.65 PM C:\GIS\COG



N CR 1278-2

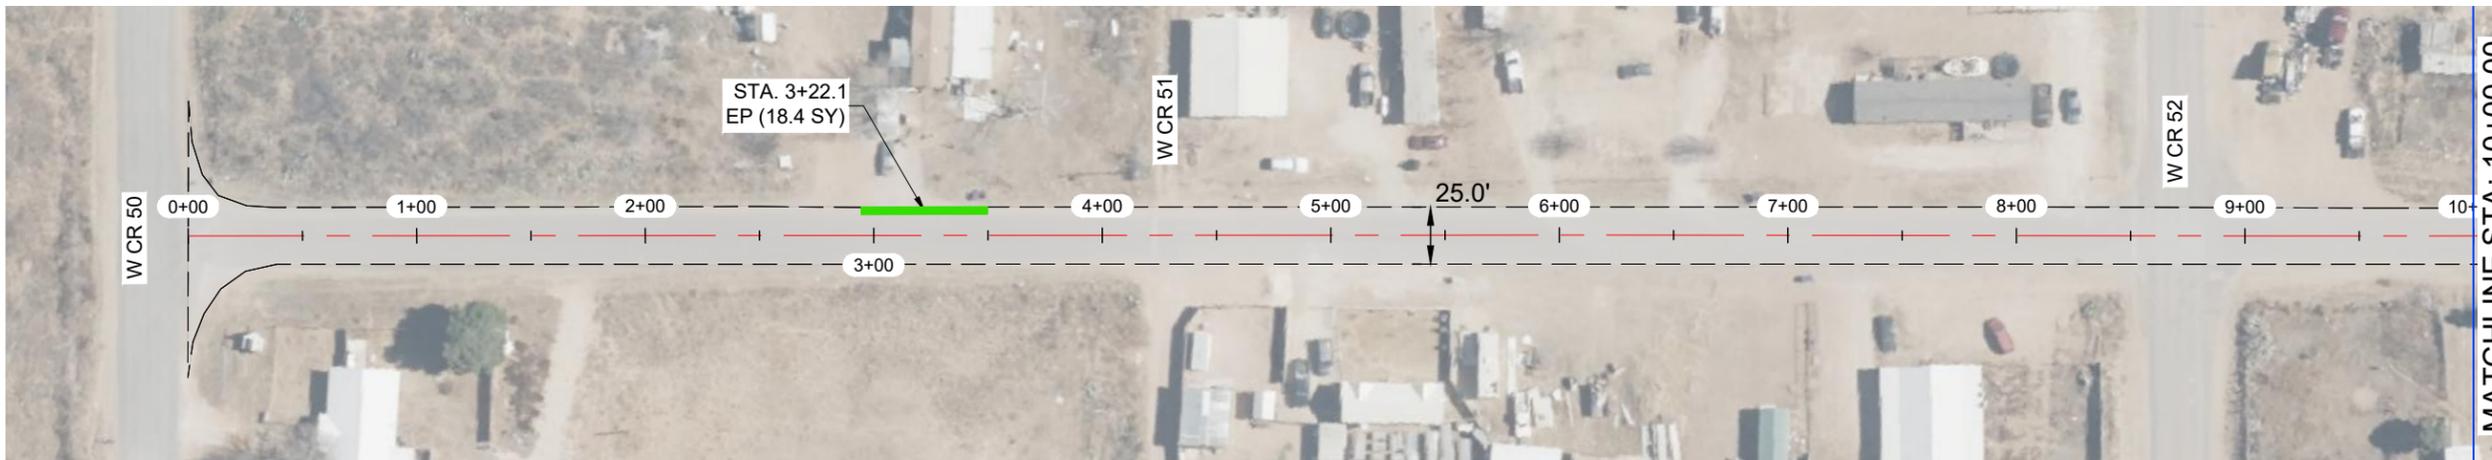


N CR 1278-2

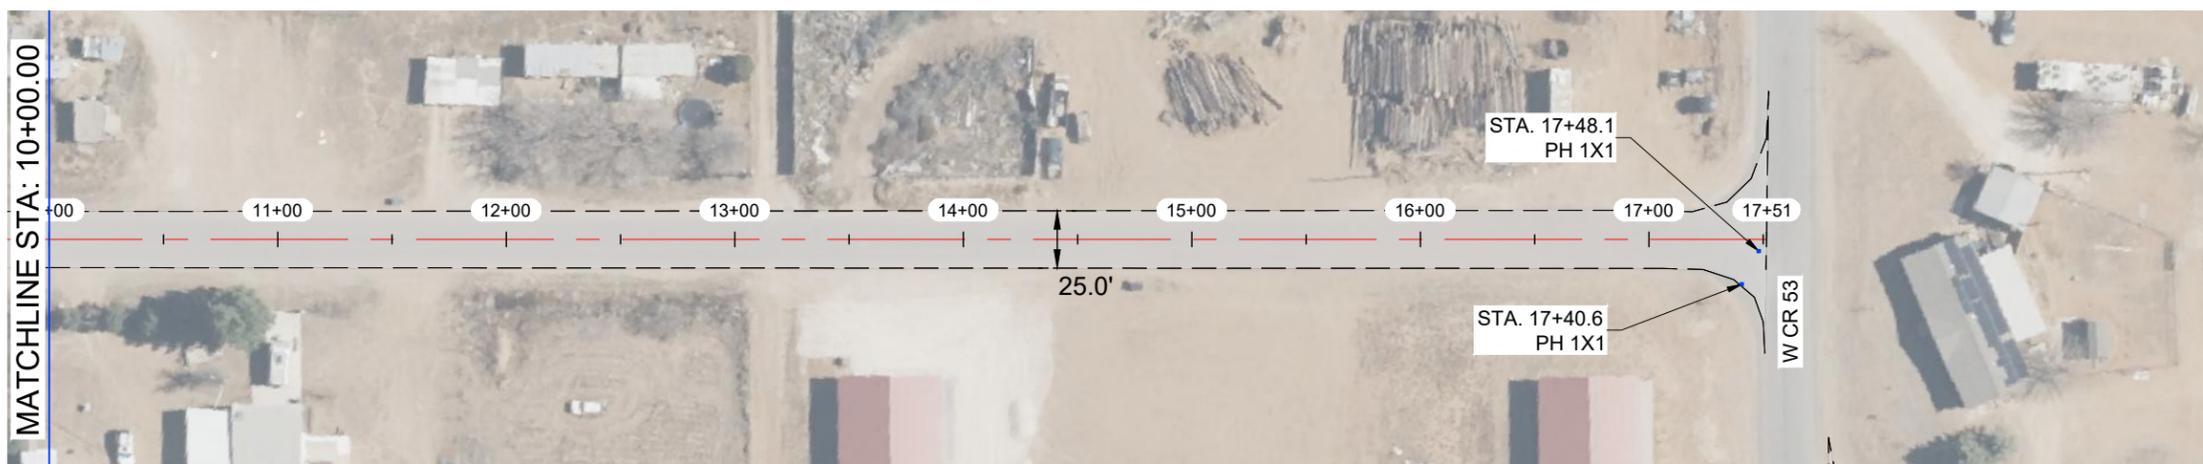

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS.

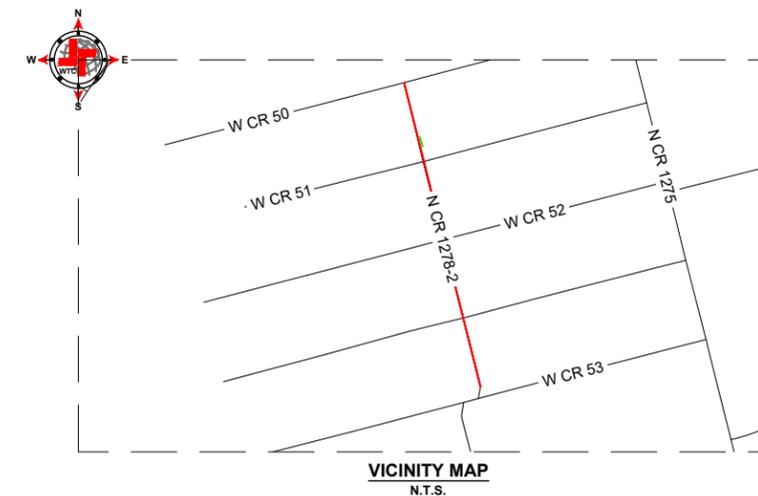

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N CR 1278-2 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	4,983	SY	
2	STRIPING	1,701	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	0.3	SY	
2	EDGE PATCHING (BY OTHERS)	18.4	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545




TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM





MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT N CR 1278-2						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 80'	F-7.0	

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\TEXAS\MIDLAND COUNTY PAVING\2024\MIDLAND PAVEMENT MAINTENANCE PROJECT\FIG 1 LAYOUT TAB F-7.0 N CR 1278-2 20240423.RVT CHJ/UCS

N CR 1283



N CR 1283

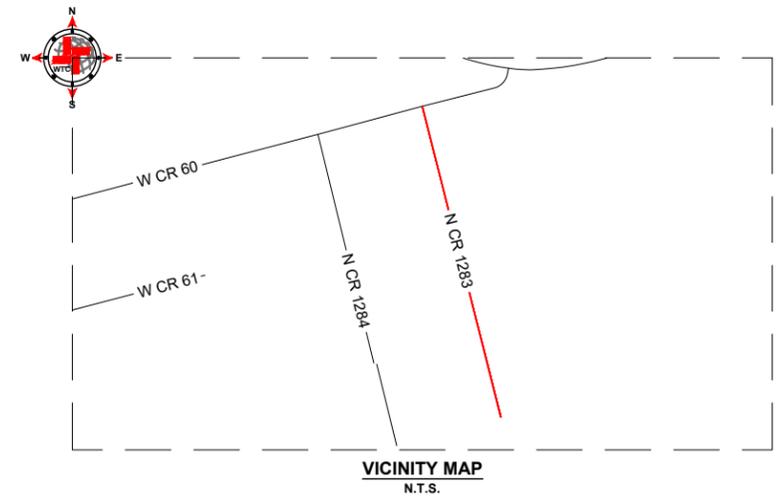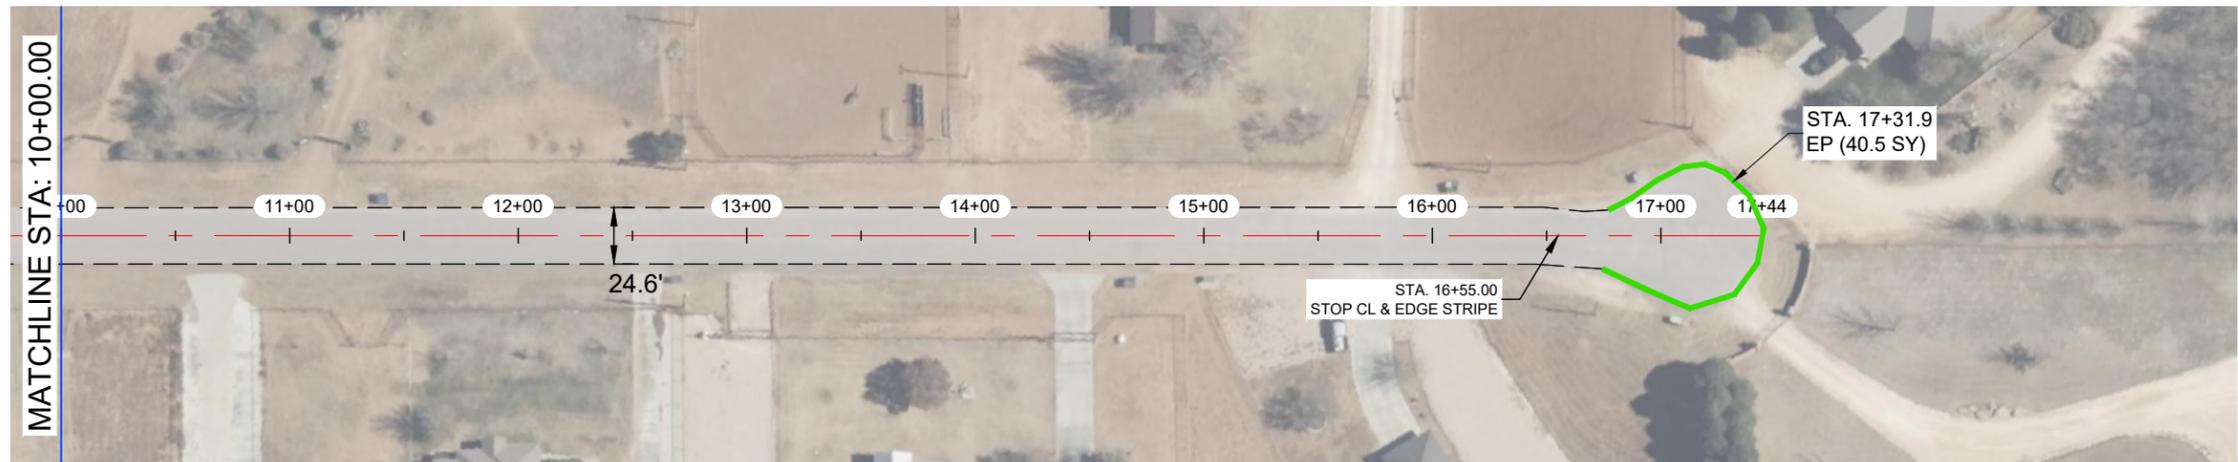

*J. Tompkins*

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS.



LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

N CR 1283 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	5,093	SY	
2	STRIPING	1,630	LF	
3	SOLID WHITE EDGE LINES		LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	7.7	SY	
2	EDGE PATCHING (BY OTHERS)	45.0	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



Before You Dig Anywhere In Texas STOP! CALL 1-800-245-4545



TOLL-FREE OSHA RULE 1926.651 REQUIRES PREVIOUS NOTIFICATION TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS					
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT N CR 1283					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 80'	F-8.0

PLAT X: PROJECT ENGINEERING & SURVEYING TEXAS MIDLAND COUNTY PAVING 2024 - DESIGN 06/28 - DRAWINGS 05/06/2024 MIDLAND PAVEMENT MAINTENANCE PROJECT PICT LAYOUT TAB F-8.0 N CR 1283 2024 2.88 PM CONJUCOS



**W CR 34**



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

**NOTES:**

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS.

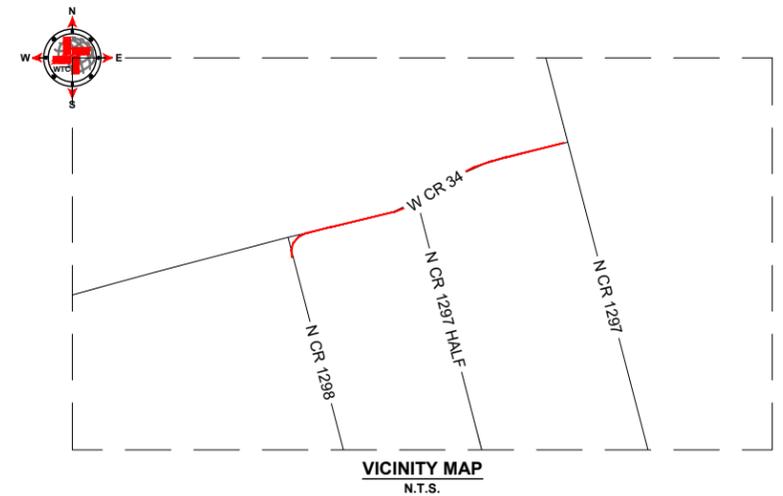

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W CR 34 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	2,632	SY	
2	STRIPING	819	LF	
3	SOLID WHITE EDGE LINES	1,638	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	3.00	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	



**West Texas Consultants, Inc.**  
 ENGINEERS PLANNERS SURVEYORS  
 405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
 TEXAS REGISTERED ENGINEERING FIRM F-2746  
 TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.



Before You Dig Anywhere In Texas  
 STOP! CALL 1-800-245-4545




TOLL-FREE OSHA RULE 1926.651  
 REQUIRES PREVIOUS NOTIFICATION  
 TEXAS ONE CALL SYSTEM


<b>MIDLAND COUNTY, TEXAS</b>					
<b>2024 MIDLAND PAVEMENT MAINTENANCE PROJECT</b>					
<b>W CR 34</b>					
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #
J.C.T.	C.CH.	3/22/24	56276	1" = 60'	F-9.0

PLAT: X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND COUNTY PAVEMENT MAINTENANCE PROJECT\2024\MIDLAND PAVEMENT MAINTENANCE PROJECT\2024\2024-03-22\2024-03-22-001-2-99.PW.CAD\2024

W CR 62

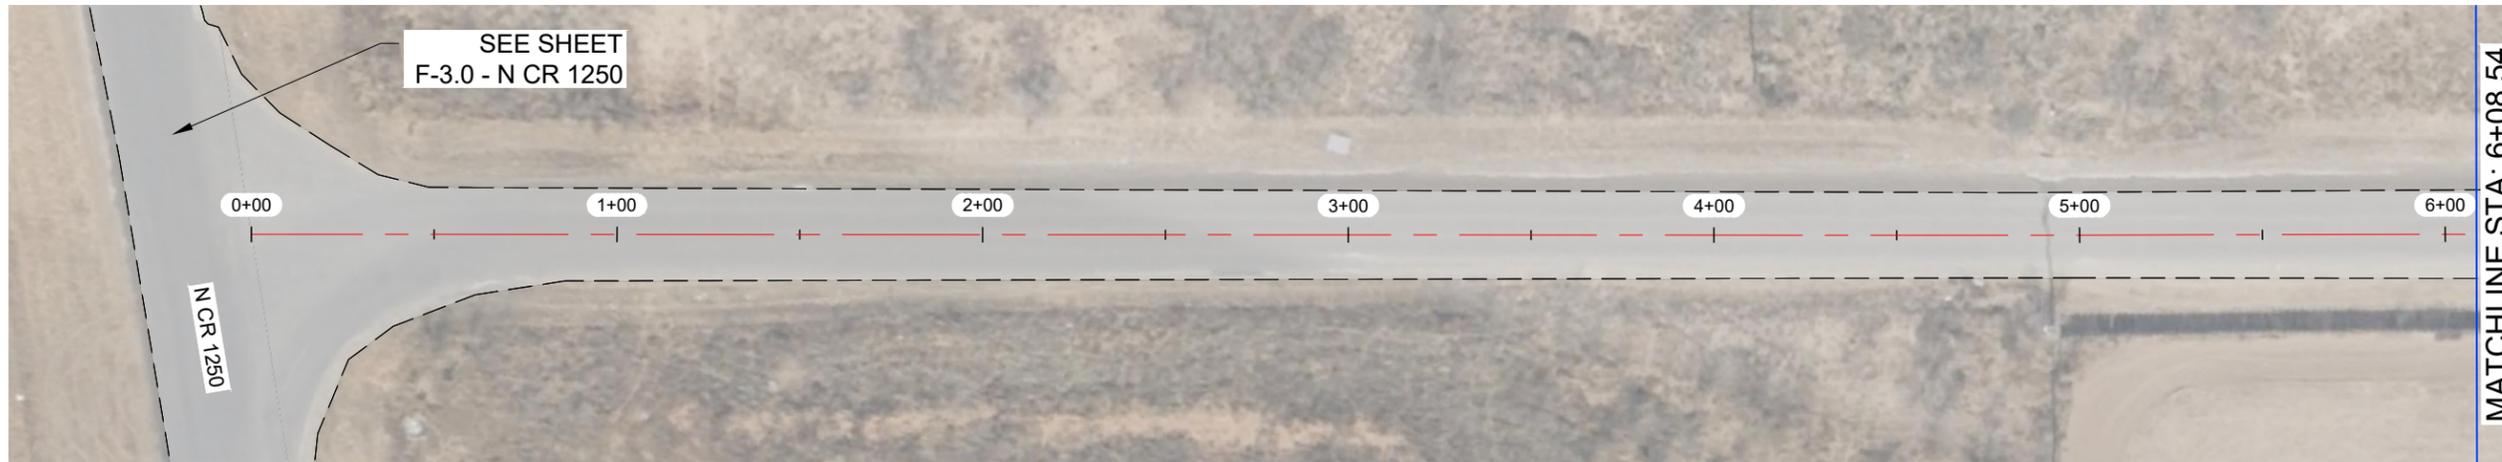


W CR 62

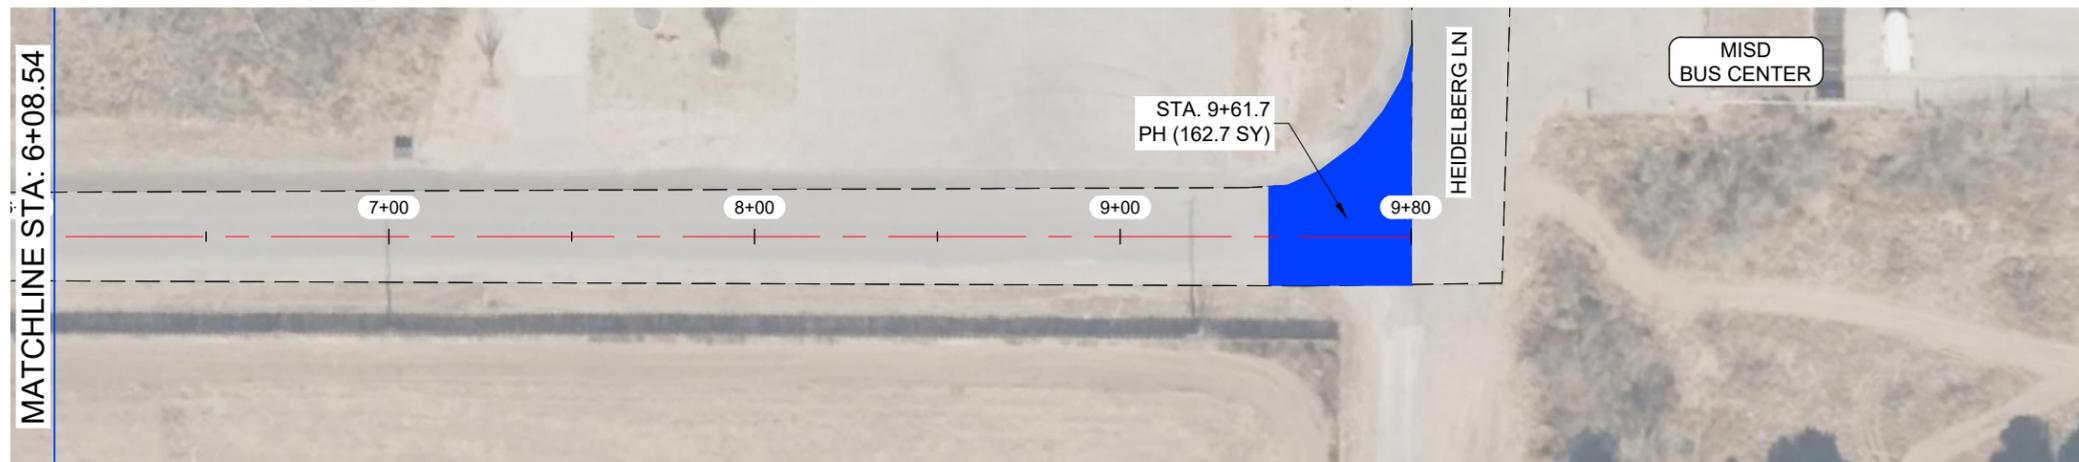

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY JAMES C. TOMPKINS, P.E. 93839 ON MARCH, 22 2024

NOTES:

- 1.- CONTRACTOR TO AVOID DAMAGING EXISTING DRIVEWAYS MAILBOXES AND OTHER IMPROVEMENTS. LOCATIONS SHOWN ABOVE ARE APPROXIMATE AND CONTRACTOR SHOULD VERIFY LOCATIONS PRIOR TO BIDDING AND CONSTRUCTION.
- 2.- CONTRACTOR SHALL REPAIR ANY DAMAGE DONE TO EXISTING DRIVEWAYS OR OTHER IMPROVEMENTS AT NO COST TO OWNER.
- 3.- VIDEO OF EXISTING SITE CONDITION IS RECOMMENDED PRIOR TO CONSTRUCTION START.
- 4.- SEE SHEETS A-2.0 AND A-2.1 FOR DETAILS.

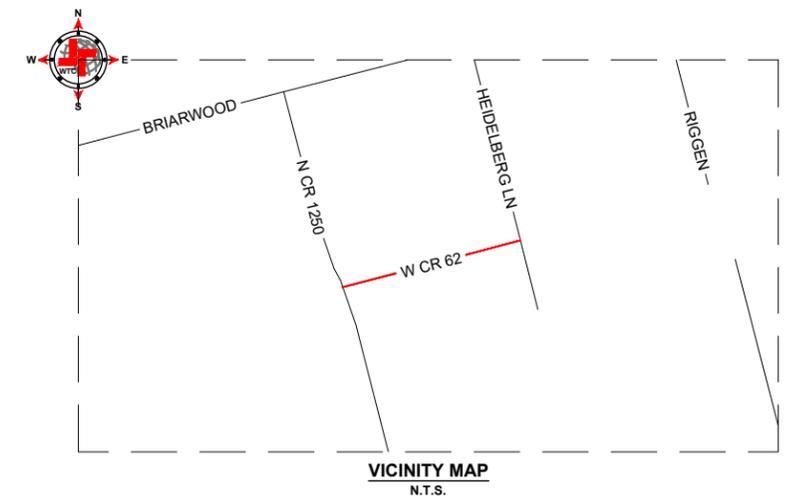

LEGEND	
	EXISTING CENTER LINE
	EXISTING EDGE OF PAVEMENT
	SEAL COAT AREA
	POTHOLE REPAIR (AS NOTED)
	EDGE PATCHING (AS NOTED)

W CR 62 QUANTITIES				
ITEM #	ITEM	QTY.	UNIT	
1	TWO-COURSE SEAL COAT (APPROX.)	2,986	SY	
2	STRIPING	930	LF	
3	SOLID WHITE EDGE LINES	1,860	LF	
WORK BY OTHERS				
ITEM #	ITEM	QTY.	UNIT	
1	POTHOLE REPAIR (BY OTHERS)	162.7	SY	
2	EDGE PATCHING (BY OTHERS)	-	SY	



West Texas Consultants, Inc.  
ENGINEERS PLANNERS SURVEYORS  
405 S.W. 1st. Street | Andrews, TX 79714 | (432) 523-2181  
TEXAS REGISTERED ENGINEERING FIRM F-2746  
TEXAS REGISTERED SURVEYOR FIRM #100792-00

REVISION DESCRIPTION	REVISION	DATE

LOCATIONS OF UNDERGROUND UTILITIES ARE APPROXIMATE AND MAY NOT INCLUDE ALL UNDERGROUND UTILITIES PRESENT. CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITY CROSSINGS BEFORE EXCAVATION OF ROADWAY.

CONTRACTOR SHALL NOTIFY PROPERTY OWNERS AND RESIDENTS A MINIMUM OF 48 HOURS IN ADVANCE OF CONSTRUCTION ACTIVITIES ON OR IN THE VICINITY OF THEIR PROPERTY.

Before You Dig Anywhere In Texas  
STOP! CALL 1-800-245-4545

TOLL-FREE OSHA RULE 1926.651  
REQUIRES PREVIOUS NOTIFICATION  
TEXAS ONE CALL SYSTEM

MIDLAND COUNTY, TEXAS						
2024 MIDLAND PAVEMENT MAINTENANCE PROJECT W CR 62						
DESIGN	DRAWN	DATE	PROJECT NO.	SCALE	SHEET #	
J.C.T.	C.CH.	3/22/24	56276	1" = 50'	F-10.0	

PLOT: X:\PROJECTS\ENGINEERING & SURVEYING\2024\MIDLAND\2024 MIDLAND PAVEMENT MAINTENANCE PROJECT\FIG 1-10.W CR 62.20240324.248.PLA.CHUUCOS